


EVSG 20

Stop end, polyamide, RAL 7035, M20



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

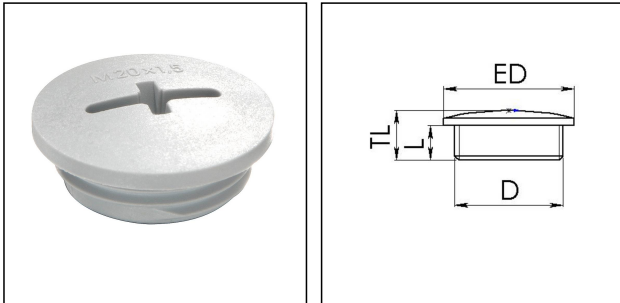

| | |
|---------------------------------|-----------------------------|
| Material | Polyamide, fibre reinforced |
| Temp. range min | -40 °C |
| Temp. range max | 100 °C |
| Glow wire test | 650 °C |
| Protection class | IP56 |
| Advice | with sealing IP66/IP68 |
| Thread type | M |
| Ø Connection thread D | 20 |
| Lead | 1,5 |
| Length screw-in thread L | 6 mm |
| Total length TL | 9,5 mm |
| External diameter ED | 24 mm |
| Product Color | RAL 7035 |
| Order no. RAL 7035 | 10060626 |
| Type | EVSG 20 |
| Packing unit | 100 |
| ETIM-Classification | EC000032 |

Recommended accessories

| | |
|----------------|----------|
| EMUG 20 | 10060772 |
| EADR 20 | 10062803 |

14.01.2021

Your Contact:

WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 📠 +49-4191-508-209
contact@wiska.de · www.wiska.com



Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com