


EVSG-ORD 40

Stop end with mounted O-Ring, polyamide, RAL 7001, M40



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

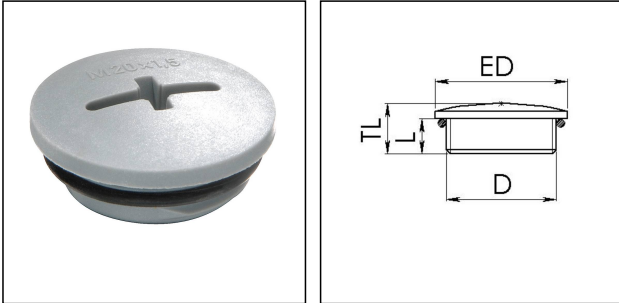

Material	Polyamide, fibre reinforced
Material sealing gasket	EPDM
Temp. range min	-40 °C
Temp. range max	100 °C
Glow wire test	650 °C
Protection class	IP66 / IP68 (5 bar 30 min)
Thread type	M
Ø Connection thread D	40
Lead	1,5
Length screw-in thread L	8 mm
Total length TL	13 mm
External diameter ED	46 mm
Product Color	RAL 7001
Order no. RAL 7001	10064655
Type	EVSG-ORD 40
Packing unit	50
ETIM-Classification	EC000032

Recommended accessories

EMUG 40	10062717
----------------	----------

14.01.2021


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

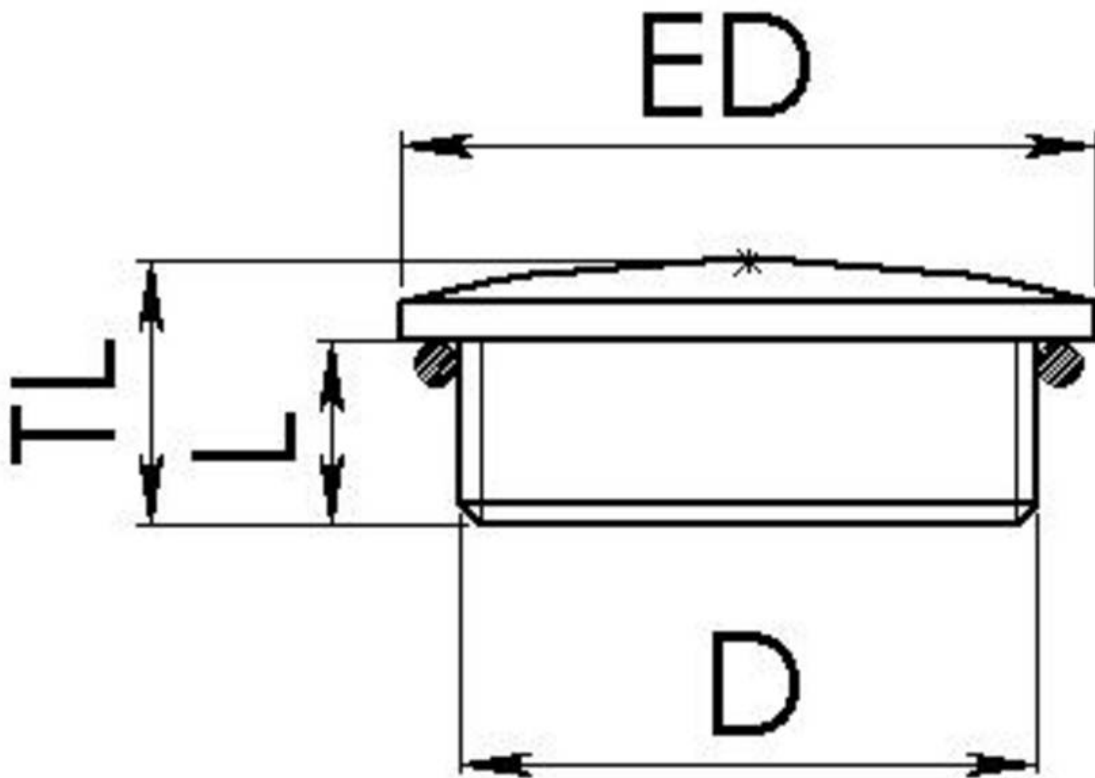

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice