
EMBFS-14-20-BK

Conduit fitting, straight, plastic/brass nickel-plated, RAL 9005, NW 14 / M20





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material Conduit fitting	polyamide UL94-V0
Material Connection thread	Brass nickel-plated
Material sealing gasket	TPU
Protection class	IP66, IP68
Temp. range min	-40 °C
Temp. range max	100 °C
Operational areas	EN 45545 - Railway
NW	14
Thread type	M
Ø Connection thread D	20
Lead	1,5
Length screw-in thread L	12 mm
Ø closure VD	30 mm
Ø inside	12 mm
Key width SW1	25 mm
Key width SW2	27 mm
Total length TL	49 mm
Type of conduit fitting	straight
UL 1696	No
Product Color	RAL 9005
Type	EMBFS-14-20-BK
Order no. RAL 7031	10106898
Packing unit	50
ETIM-Classification	EC001176

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice


Recommended accessories

EMMU 20	10063143
BCA-S-14-BK	10107074
BCAV-S-14-BK	10107089
BCIV-S-14-BK	10107106
BCAB-L-14-BK	10109184
BCIB-H-14-BK	10109223

14.01.2021

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

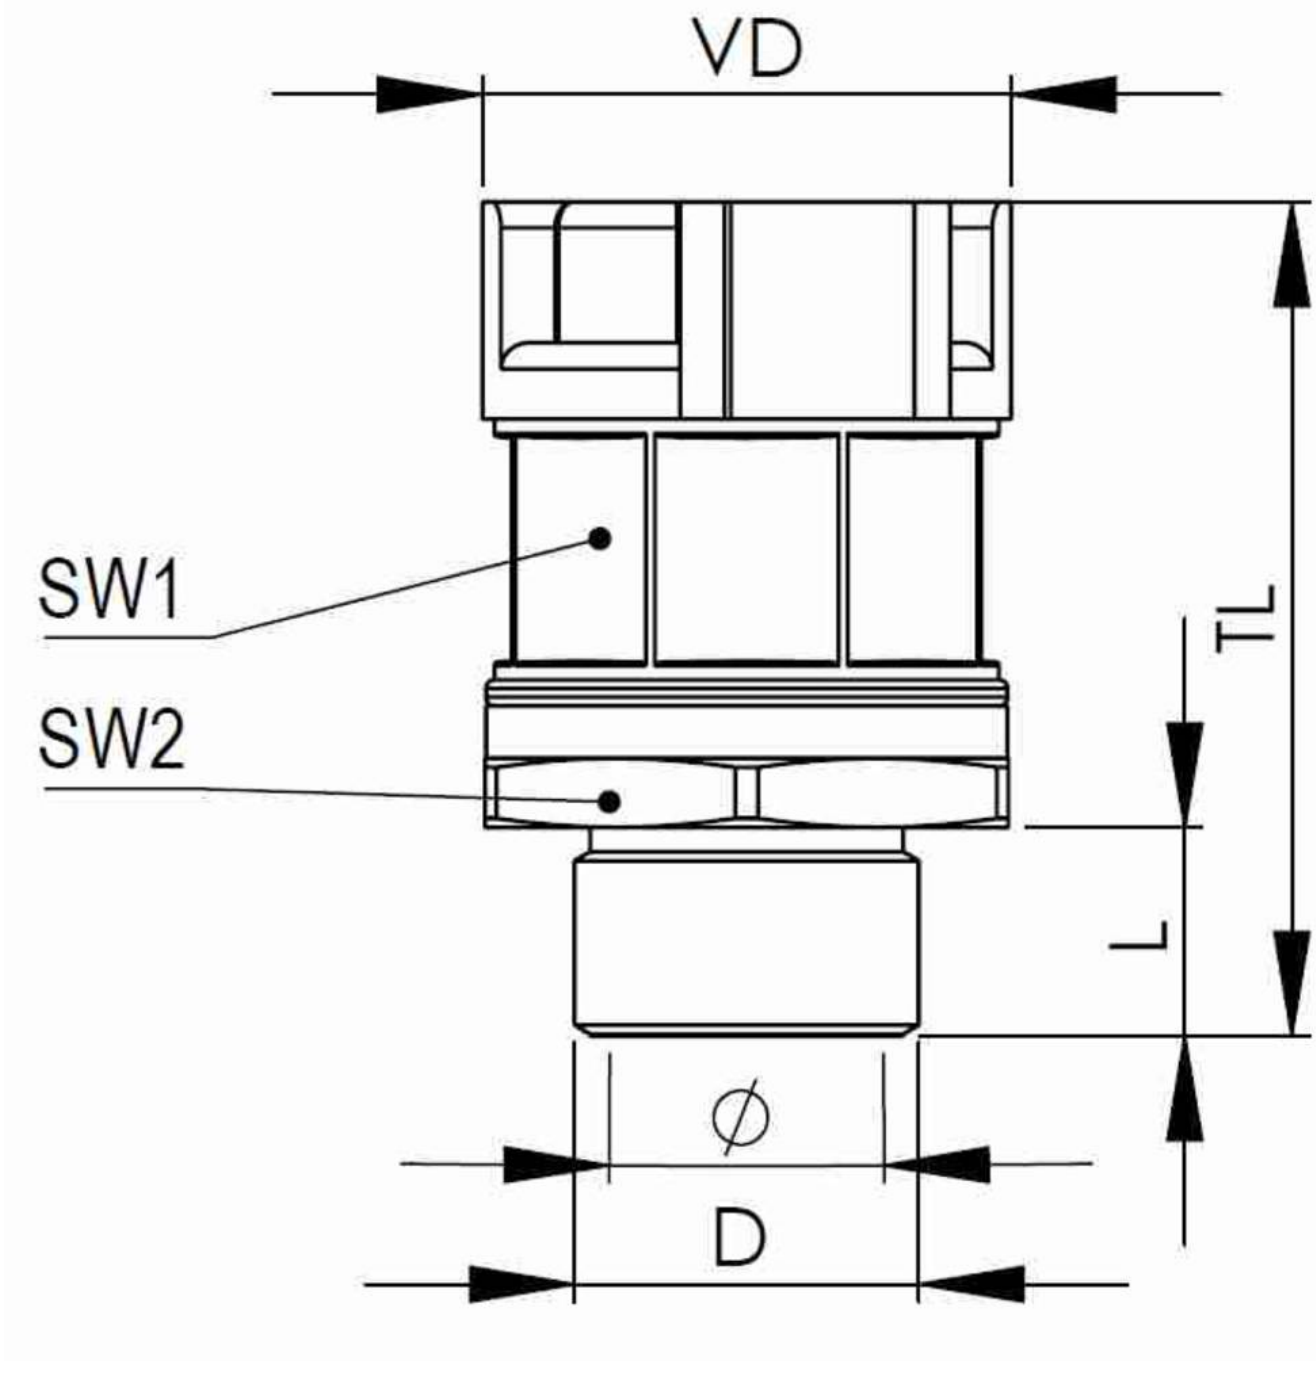

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice