
BCIV-S-14-BG

Conduit PA12 UL94-V2, RAL 7031, NW14





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material	PA12 UL94-V2
Temp. range min	-40 °C
Temp. range max	110 °C
Operational areas	Railway technology
Product Color	RAL 7031
NW	14
External diameter ED	18,5 mm
Ø inside	14,2 mm
Profile width A	3,3 mm
Width B	2,9 mm
Bending radius R	34 mm
Wall thickness S	0,3 mm
Model	Standard profile
Type	BCIV-S-14-BG
Order no. RAL 7031	10107114
Packing unit	50 m
ETIM-Classification	EC001177

Recommended accessories

EBFS-14-20-BG	10106849
EMBFS-14-20-BG	10106882
BCC-14-BG	10106933
BCAV-S-14-BG	10107098


Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

14.01.2021

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

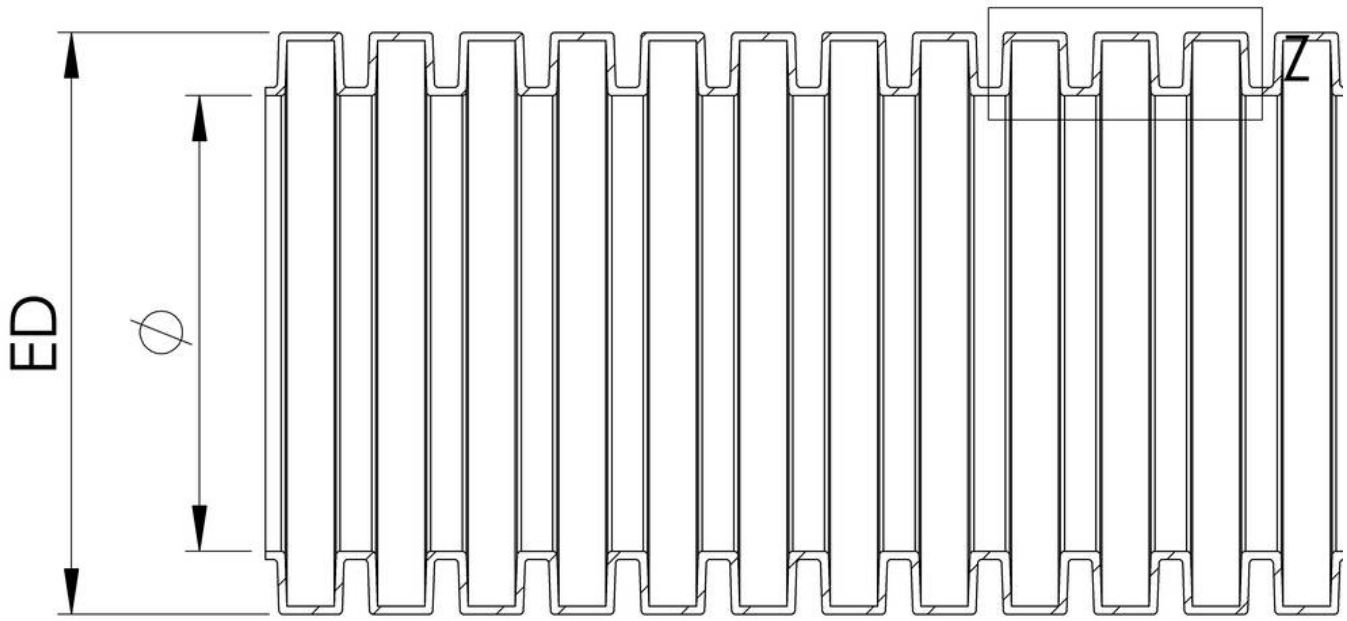

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice