


BMCG-PU-C-27-LG

Conduit, galvanized steel, PU coated, corrugated, RAL 7035, NW27



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

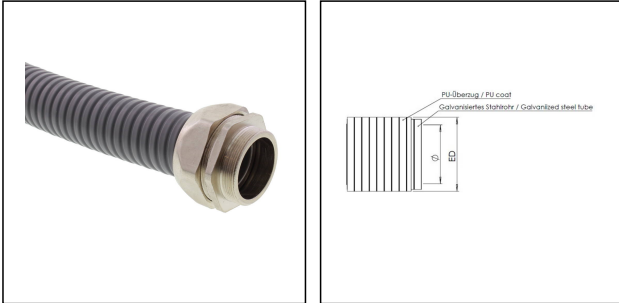

Material	galvanized steel
Sheathing material 1st coating	PU
Surface	corrugated
Product Color	RAL 7035
Protection class	IP67
Temp. range min	-45 °C
Temp. range max	120 °C
Operational areas	EN 45545 - Railway
NW	27
External diameter ED	31,7 mm
Ø inside	26,5 mm
Bending radius R	85 mm
Type	BMCG-PU-C-27-LG
WISKA-Order no.	10109075
Packing unit	30 m
ETIM-Classification	EC001179

Recommended accessories

EMBMFS-C-27-25	10109106
EMBMFS-C-27-32	10109108
EMBMFS-C-27-40	10109110

14.01.2021


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

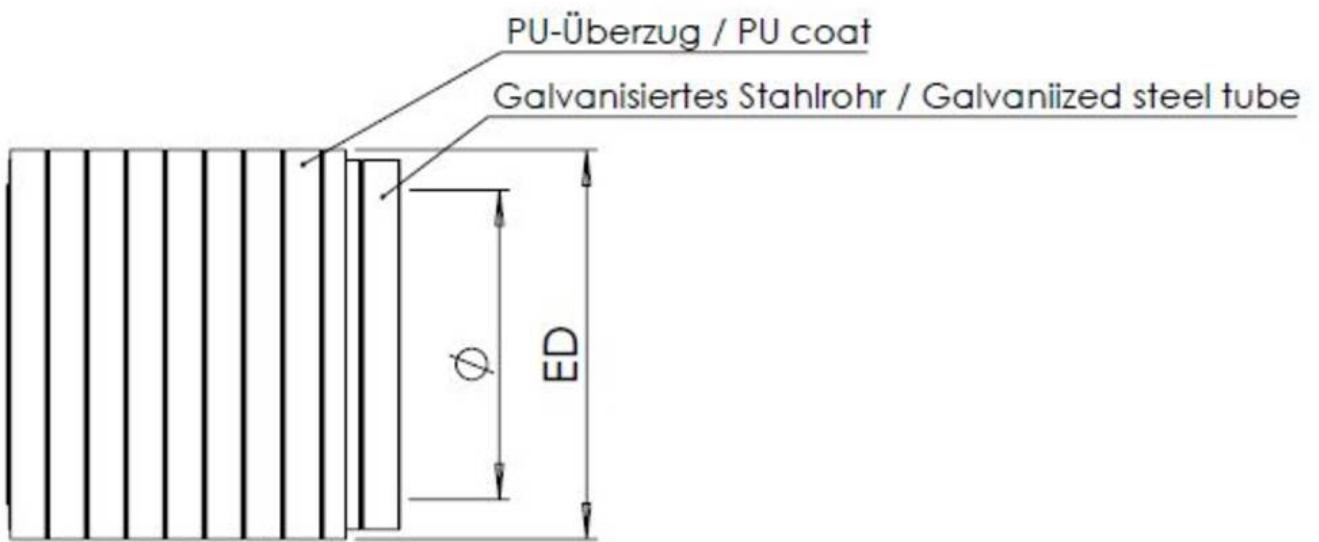

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com