


## BMCG-PVC-C-BG-16

Conduit, galvanized steel core PVC coated and steel wire over-braid, NW16



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

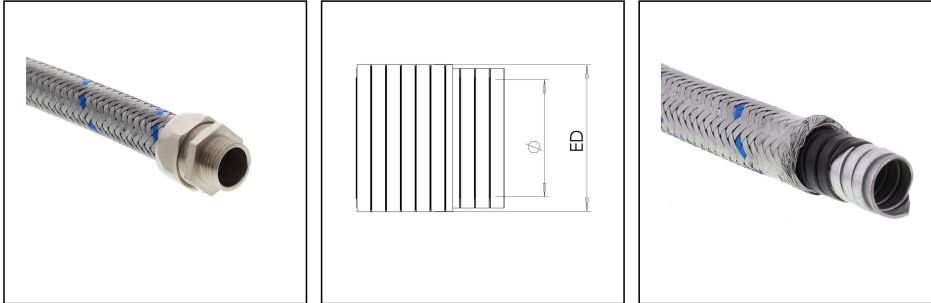

<b>Material</b>	galvanized steel
<b>Sheathing material 1st coating</b>	PVC
<b>Sheathing material 2st coating</b>	Steel wire, galvanized
<b>Surface</b>	corrugated
<b>Protection class</b>	IP67
<b>Temp. range min</b>	-15 °C
<b>Temp. range max</b>	70 °C
<b>Operational areas</b>	Mechanical plant engineering
<b>NW</b>	16
<b>External diameter ED</b>	21 mm
<b>Ø inside</b>	15,5 mm
<b>Bending radius R</b>	55 mm
<b>Type</b>	BMCG-PVC-C-BG-16
<b>WISKA-Order no.</b>	10109081
<b>Packing unit</b>	30 m
<b>ETIM-Classification</b>	EC001179


### Recommended accessories

<b>EMBMFS-S-16-16</b>	10109095
<b>EMBMFS-S-16-20</b>	10109097

14.01.2021

Your Contact:

WISKA Hoppmann GmbH  
 Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany  
 ☎ +49-4191-508-0 · 📠 +49-4191-508-209  
 contact@wiska.de · www.wiska.com

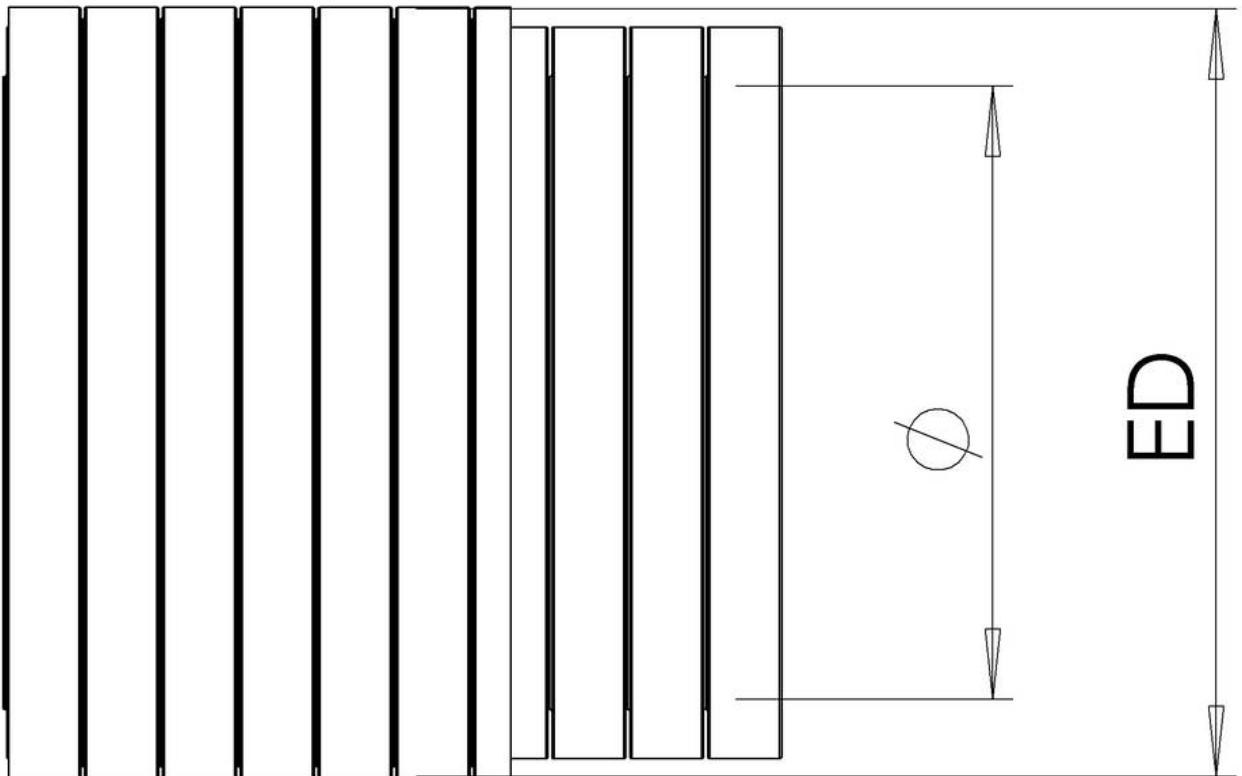

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com