


## BCIB-H-12-BK

Conduit, PA 12 HB, heavyweight, RAL 9005, NW12



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

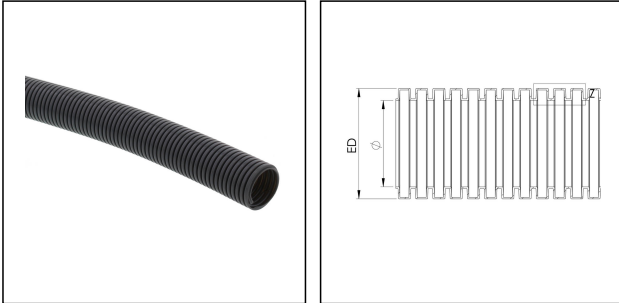

<b>Material</b>	PA12 UL94-HB
<b>Temp. range min</b>	-40 °C
<b>Temp. range max</b>	120 °C
<b>Operational areas</b>	Robotics applications
<b>Product Color</b>	RAL 9005
<b>NW</b>	12
<b>External diameter ED</b>	15,8 mm
<b>Ø inside</b>	12 mm
<b>Profile width A</b>	3,1 mm
<b>Width B</b>	2,2 mm
<b>Bending radius R</b>	28 mm
<b>Wall thickness S</b>	0,4 mm
<b>Model</b>	heavy
<b>Type</b>	BCIB-H-12-BK
<b>Order no. RAL 9005</b>	10109222
<b>Packing unit</b>	50 m
<b>ETIM-Classification</b>	EC001175

### Recommended accessories

<b>EBFS-12-16-BK</b>	10106864
<b>EBFS-12-20-BK</b>	10106865
<b>EMBFS-12-16-BK</b>	10106896
<b>EMBFS-12-20-BK</b>	10106897

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

<b>EMBFSI-12-16-BK</b>	10106923
<b>EMBFSI-12-20-BK</b>	10106924
<b>BCC-12-BK</b>	10106941
<b>EBF45-12-16-BK</b>	10106958
<b>EBF90-12-16-BK</b>	10106976
<b>EMBF90-12-16-BK</b>	10107016
<b>EMBF90-12-20-BK</b>	10107017
<b>EMBF45-12-16-BK</b>	10107321
<b>EMBF45-12-20-BK</b>	10107322
<b>EMBF45I-12-16-BK</b>	10107340
<b>EMBF45I-12-20-BK</b>	10107341
<b>EMBF90I-12-16-BK</b>	10107364
<b>EMBF90I-12-20-BK</b>	10107365
<b>EMBFSCG-12-16-BK</b>	10107380
<b>EMBFSCG-12-20-BK</b>	10107381
<b>EMBF45CG-12-16-BK</b>	10107993
<b>EMBF90CG-12-16-BK</b>	10108007
<b>EBF45-12-20-BK</b>	10108877

14.01.2021

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

✉ contact@wiska.de · 🌐 www.wiska.com