
OSAJ 63 / M50(M)*M63(F)

Ex d enlargement adaptor, brass nickel-plated, M50-M63






Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material	Brass nickel-plated
Temp. range min	-60 °C
Temp. range max	110 °C
Protection class	IP66 / IP67
Type of protection	Ex eb, Ex db, Ex tb
Ex-Certificate	IECEx, ATEX
Thread type outer	M
Ø outer thread	50
Lead outer	1,5
Length screw-in thread L	15 mm
Thread type inner	M
Ø inner thread	63
Lead inner	1,5
Length internal thread	18 mm
Key width SW	70 mm
Collar diameter (E)	75 mm
Total length TL	40 mm
Surface	Nickel-plated
Order no. nickel-plated	50065700
Type	OSAJ 63 / M50(M)*M63(F)
Packing unit	1
ETIM-Classification	EC000938

14.01.2021

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

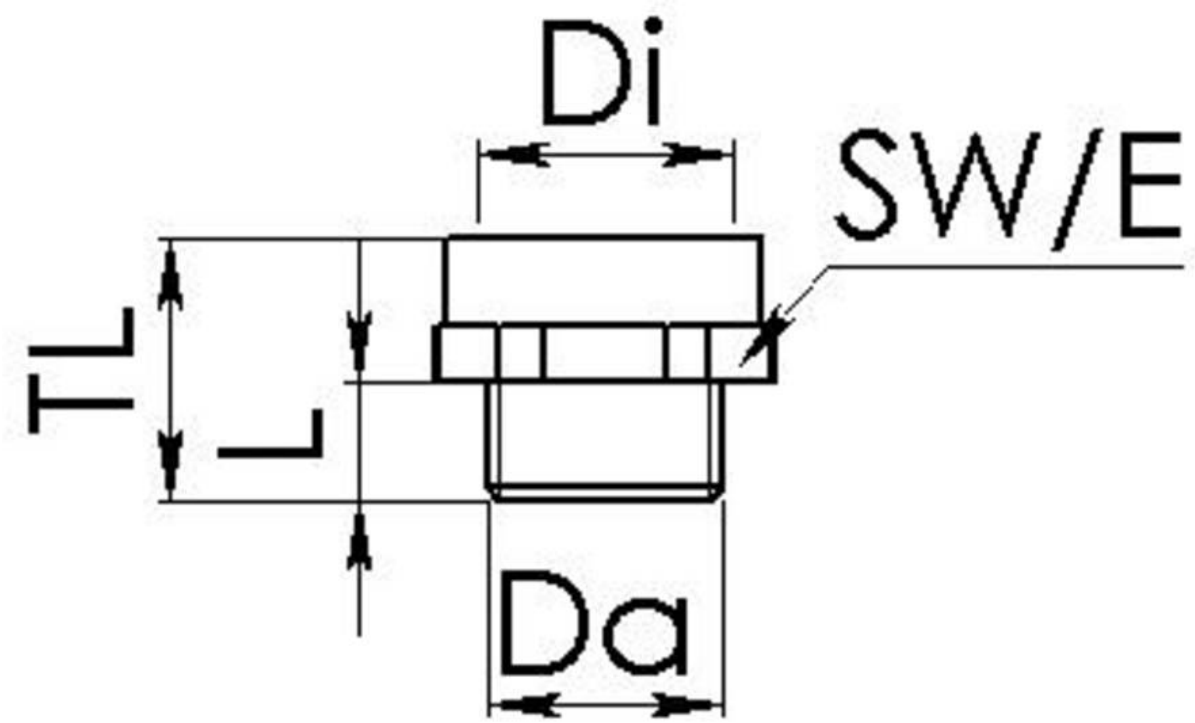

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice