





shunt trip left 110-127 V AC 50/60 Hz/DC accessory for: 3VA4/5/6

Model	
product brand name	SENTRON
product designation	Auxiliary release
accessories	Auxiliary release
General technical data	
degree of pollution	3
overvoltage category	III
apparent power consumption / maximum	40 VA
consumed active power / at DC / maximum	40 W
Voltage	
surge voltage resistance	4 kV
Mechanical Design	
height	65.1 mm
width	25.7 mm
number of slots	3
depth	31.2 mm
net weight	91 g
tightening torque / with screw-type terminals / minimum	0.4 N·m
tightening torque / with screw-type terminals / maximum	0.5 N·m
Connections according IEC	
stripped length	10 mm
connectable conductor cross-section	0.5 ... 1.5
<ul style="list-style-type: none"> • minimum • maximum 	
AWG number / as coded connectable conductor cross section / for auxiliary contacts	
<ul style="list-style-type: none"> • minimum • maximum 	20 16
Connections according UL	
stripped length [in]	0.4 in
tightening torque [lbf·in] / with screw-type terminals / minimum	3.5 lbf·in
tightening torque [lbf·in] / with screw-type terminals / maximum	4.4 lbf·in
Certificates	
General Product Approval	EMV



[Miscellaneous](#)





Test Certificates	Maritime application	other	Environment		
Type Test Certificates/Test Report		Confirmation	Miscellaneous		Environmental Confirmations

Environment

[Environmental Confirmations](#)

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9978-0BL32>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3VA9978-0BL32>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9978-0BL32
- CAX-Online-Generator
<http://www.siemens.com/cax>
- Tender specifications
<http://www.siemens.com/specifications>

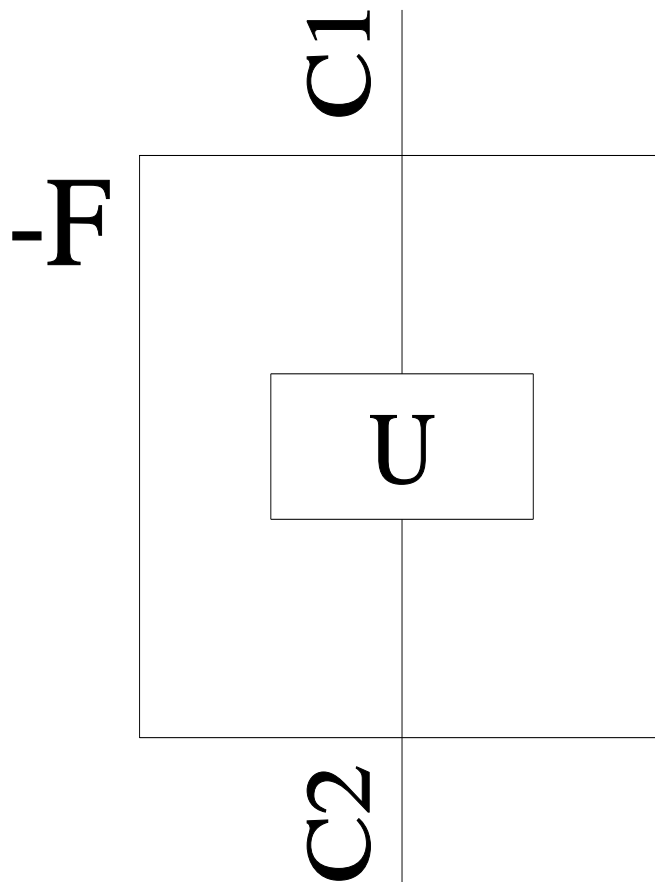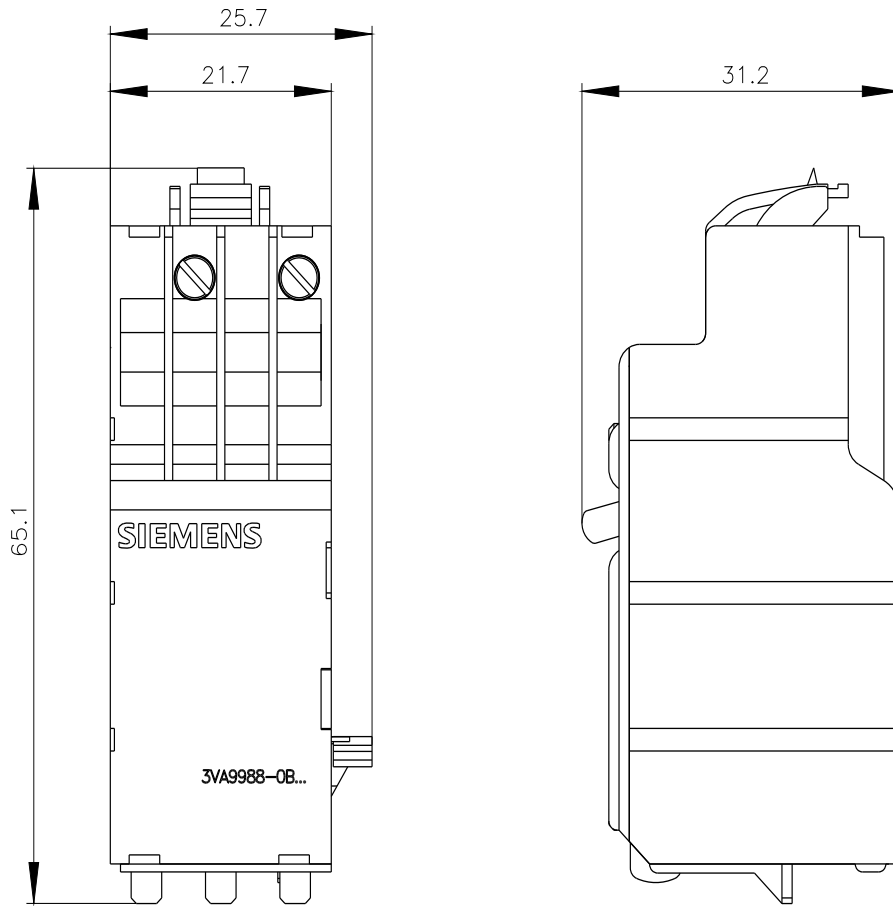

last modified:

4/4/2025 

