




Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Radio interference suppression filter, three-phase with neutral conductor HLV 110-500/12

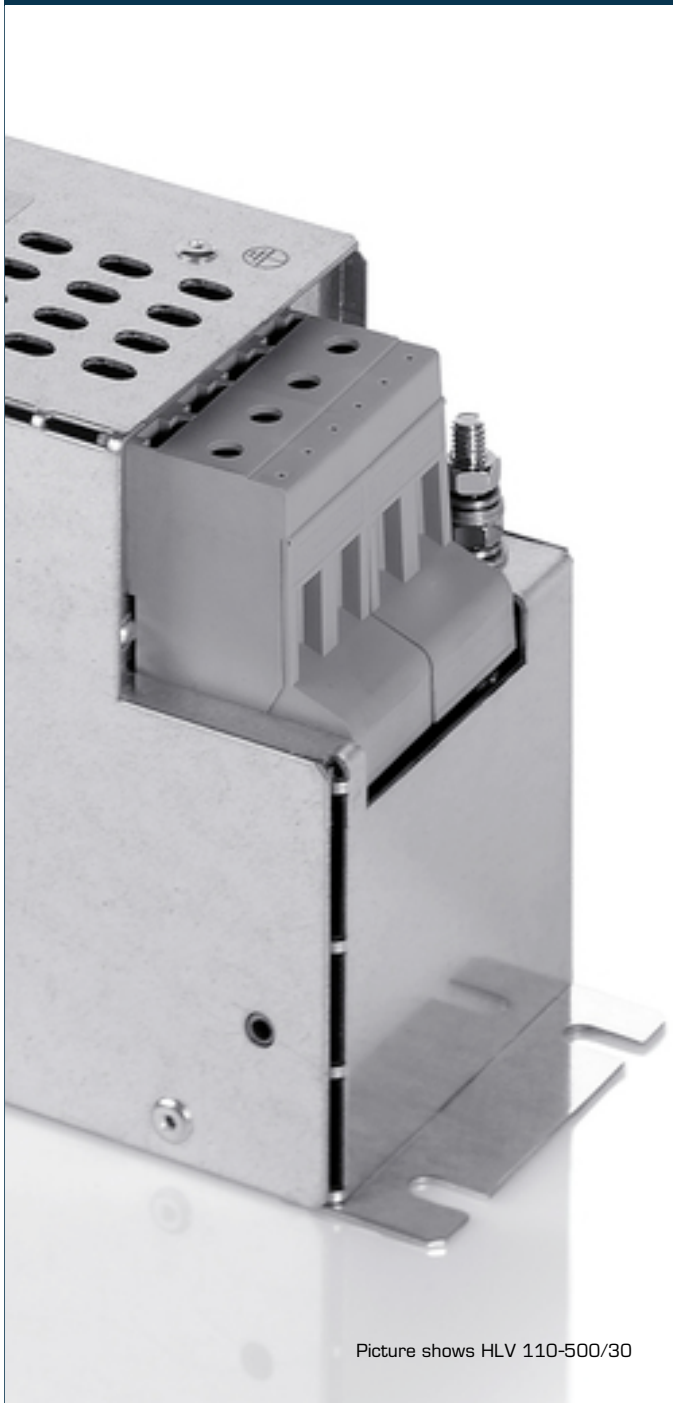

Picture shows HLV 110-500/30


Advantages

- For enhanced requirements
- Single-stage filter concept
- Efficient filter effect against line-bound interference emissions
- Increase in the interference immunity of the connected consumer

Applications

Radio interference suppression filter for line-side interference suppression of single devices, frequency inverters or as group interference suppression.


Sample application

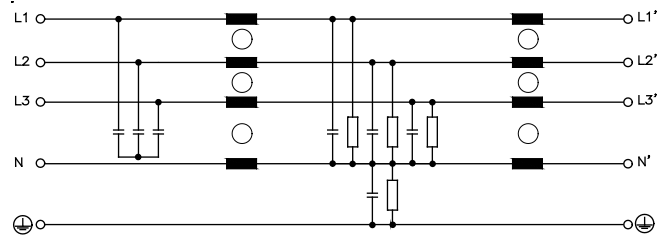

Standards

Radio interference suppression filter to DIN EN 60939-2

Approvals




Radio interference suppression filter, three-phase with neutral conductor

HLV 110-500/12

Type		HLV 110-500/12
Electrical data	Operating data	
	Rated voltage	3 x 520 Vac
	Voltage range	0 - 520 Vac
	Rated current	3 x 12 A+N
	Leakage current (50 Hz)*	19.00 mA
	Leakage current (50 Hz)**	187.00 mA
	Rated frequency	50 - 60 Hz
	Oversrating Capacity	150 %, shortly
	Approvals	
	Approvals	-
	Environment	
	Ambient temperature max.	50 °C
	Climatic category	25/085/21 (in accordance with EN 60068-1)
	Safety and protection	
Protection index	IP 20	
Type	Metal enclosure	
Safety class (prepared)	I	
Test voltage	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	
Notes		
*	Leakage current measured against the maximum permissible input voltage fluctuation in accordance with IEC 38 ±10 %	
**	Leakage current by loss of two phases	
Order numbers		
Order Number	HLV 110-500/12	

Type		HLV 110-500/12
Mechanical data	Terminal and mounting	
	Terminals phase	Screw clamp, 4 mm ²
	Terminals phase/N	Screw clamp, 4 mm ²
	Fixing method	Mounting lugs
	Fixing screws	M5
Measures and weights		
Weight	0.97 kg	

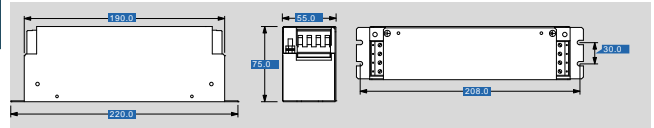

Subjects to change.



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Radio interference suppression filter, for inverter applications and plant engineering, three phase + neutral conductor, 4 x 8 - 4 x 250 A	HLV11050012	HLV 110-500/12	Buy on EAN