



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

# Marker for terminal blocks - UCT-TM 8 GN CUS - 0829622

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Marker for terminal blocks, can be ordered: by sheet, green, labeled according to customer specifications, Mounting type: Snap into tall marker groove, for terminal block width: 8.2 mm, Lettering field: 7.6 x 10.5 mm



## Why buy this product

- Labeling service: Phoenix Contact can custom-label all UniCard markers according to your requirements
- The UCT-TM... UniCard labeling range includes markers for products with tall marker grooves



## Key Commercial Data

|              |                     |
|--------------|---------------------|
| Packing unit | 1 STK               |
| GTIN         | <br>4 046356 597715 |

## Technical data

### Dimensions

|            |         |
|------------|---------|
| Length (b) | 10.5 mm |
| Width (a)  | 7.6 mm  |
| Height     | 4.76 mm |

### Ambient conditions

|                                 |                   |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 120 °C |
|---------------------------------|-------------------|

### General

|  |                                     |
|--|-------------------------------------|
| Note                                   | Can be labeled via thermal transfer |
| Color                                  | green                               |
| Components                             | free from silicone and halogen      |
| Flammability rating according to UL 94 | V0                                  |
| Material                               | PC                                  |
|  | PC                                  |
| Wipe resistance                        | DIN EN 61010-1 (VDE 0411-1)         |
| Number of individual labels            | 42                                  |
| Number of individual labels per row    | 7                                   |

# Marker for terminal blocks - UCT-TM 8 GN CUS - 0829622

## Technical data

### General

|   |                                    |
|---|------------------------------------|
| RoHS compliant  | Yes                                |
| Printability  | Thermal transfer                   |
|   | Inkjet printing                    |
| Device  | 5146464 THERMOMARK CARD            |
|   | 5146480 THERMOMARK CARD-UCT-MAG1   |
|   | 5147888 BLUEMARK LED               |
|   | 5147999 BLUEMARK CLED              |
| Ink ribbon  | 0801371 THERMOMARK-RIBBON 110-TC   |
|   | 5147421 BLUEMARK FLUID-CARTRIDGE   |
|   | 5146662 BLUEMARK CLED-FLUID-CARTR. |
| Test for substances that would hinder coating with paint or varnish | VW PV 3.10.7:2005-02               |
| Result  | Test passed                        |
| Test specification weathering-resistance                            | Following ISO 4892-2:2013-03       |
| Test duration   | 96 h                               |
| Wipe resistance test result   | Test passed                        |
| Salt spray test specification                                       | DIN EN ISO 9227:2012-09            |
| Test duration   | 96 h                               |
| Salt spray testing result   | Test passed                        |
| Alternating condensation climate with SO2 test specification        | DIN 50018:2013-05                  |
| Climate level   | AHT 1.0 S                          |
| Cycles  | 2                                  |
| Condensation test result  | Test passed                        |
| Wipe resistance of test specification inscriptions                  | IEC 61010-1:2010-06                |
| Result  | Test passed                        |
| Marking mounting type   | Snap into tall marker groove       |

### Standards and Regulations

|  |                             |
|--|-----------------------------|
| Wipe resistance                        | DIN EN 61010-1 (VDE 0411-1) |
| Flammability rating according to UL 94 | V0                          |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 24190208 |
| eCl@ss 4.1 | 24190208 |
| eCl@ss 5.0 | 27149103 |
| eCl@ss 5.1 | 27141137 |
| eCl@ss 6.0 | 27141137 |
| eCl@ss 7.0 | 27141137 |
| eCl@ss 8.0 | 27141137 |

# Marker for terminal blocks - UCT-TM 8 GN CUS - 0829622

## Classifications

### ETIM


|          |          |
|----------|----------|
| ETIM 3.0 | EC000761 |
| ETIM 4.0 | EC000761 |
| ETIM 5.0 | EC000761 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11     | 39121410 |
| UNSPSC 12.01  | 39121410 |
| UNSPSC 13.2   | 39121410 |

## Drawings

Schematic diagram

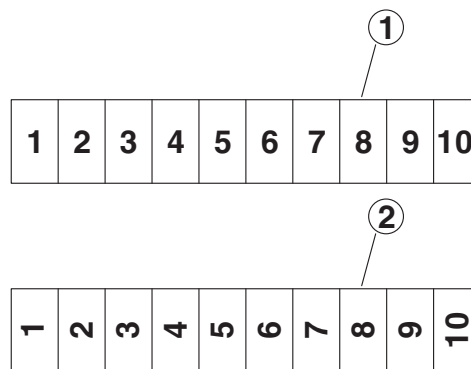

- ① Horizontal
- ② Vertical

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

| Product  | Code    | Reference          | Product link               |
|--|---------|--------------------|----------------------------|
| Marker for terminal blocks, Can be ordered: By sheet, green, Labeled according to customer specifications, Mounting type: Snap into tall marker groove, For terminal block width: 8.2 mm, Lettering field: 7.6 x 10.5 mm | 0829622 | UCT-TM 8<br>GN CUS | <a href="#">Buy on EAN</a> |