



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

Sensor/Actuator cable - SAC-3P- 5,0-PUR/A - 1402984

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/Actuator cable, 3-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Valve connector A, Cable length: 5 m

Why buy this product

- Easy and safe: 100% electrically tested plug-in components
- Robust valve connector without protective circuit
- Our standard: robust halogen-free PUR cable

Key Commercial Data

| | |
|--------------|---------------------|
| Packing unit | 1 STK |
| GTIN | 4 046356 638166 |

Technical data

Dimensions

| | |
|-----------------|-----|
| Length of cable | 5 m |
|-----------------|-----|

Ambient conditions

| | |
|---------------------------------|-------------------------------|
| Ambient temperature (operation) | -20 °C ... 85 °C (valve plug) |
| Degree of protection | IP65 |
| | IP67 |

General

| | |
|------------------------------|-------------------------------|
| Rated current at 40°C | 6 A |
| Rated voltage | 230 V |
| Number of positions | 3 |
| Insulation resistance | ≥ 100 MΩ |
| Standards/regulations | Valve connector EN 175301-803 |
| Status display | No |
| Protective circuit/component | Unwired |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Torque | 0.6 Nm (Valve connector) |

Sensor/Actuator cable - SAC-3P- 5,0-PUR/A - 1402984

Technical data

Material

| | |
|--|-------------------|
| Flammability rating according to UL 94 | V0 |
| Valve plug contact material | CuSn |
| Valve plug contact surface material | Sn |
| Valve plug contact insert material | PA 66 |
| Material housing valve plug | TPU |
| Sealing material | TPU (Seal molded) |

Standards and Regulations

| | |
|--|-----------------|
| Standard designation | Valve connector |
| Standards/regulations | EN 175301-803 |
| Flammability rating according to UL 94 | V0 |

Cable

| | |
|---|--|
| Cable type | PUR halogen-free black |
| Cable type (abbreviation) | PUR |
| Cable abbreviation | Li9Y11Y-HF |
| UL AWM style | 20549 |
| Conductor cross section | 3x 0.5 mm ² |
| AWG signal line | 20 |
| Conductor structure signal line | 28x 0.15 mm |
| Core diameter including insulation | 1.5 mm ±0.05 mm (Signal line) |
| Wire colors | black 1, black 2, green/yellow |
| Overall twist | 3 wires, twisted |
| External sheath, color | black-gray RAL 7021 |
| External cable diameter D | 4.5 mm ±0.2 mm |
| Smallest bending radius, fixed installation | 22.5 mm |
| Number of bending cycles | 15000000 |
| Bending radius | 50 mm |
| Traversing path | 0.9 m |
| Traversing rate | 5 m/s |
| Acceleration | 30 m/s ² |
| Outer sheath, material | PUR |
| Material conductor insulation | PP |
| Conductor material | Bare Cu litz wires |
| Insulation resistance | min. 20 MΩ*km |
| Conductor resistance | 39 Ω/km (at 20 °C) |
| Nominal voltage, cable | ≤ 300 V |
| Test voltage, cable | ≥ 1200 V |
| Flame resistance | According to DIN VDE 0482 |
| | According to DIN EN 50265-2-1 |
| Halogen-free | in accordance with DIN VDE 0472 part 815 |
| Other resistance | Largely oil-resistant |

Sensor/Actuator cable - SAC-3P- 5,0-PUR/A - 1402984

Technical data

Cable

| | |
|---------------------------------|--|
| | partly UV-resistant in accordance with DIN EN ISO 4892-2-A |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -20 °C ... 80 °C (cable, flexible installation) |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27060300 |
| eCl@ss 5.1 | 27061804 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27279218 |

ETIM

| | |
|----------|----------|
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |

Approvals

Approvals

Approvals

EAC / CSA / CSAus / cCSAus

Ex Approvals

Approvals submitted

Approval details

Sensor/Actuator cable - SAC-3P- 5,0-PUR/A - 1402984

Approvals

| |
|-----|
| EAC |
|-----|


| | |
|--------------------------------|-------|
| CSA | |
| Nominal current I _N | 6 A |
| Nominal voltage U _N | 230 V |

| | |
|--------------------------------|-------|
| CSAus | |
| Nominal current I _N | 6 A |
| Nominal voltage U _N | 230 V |

| |
|--------|
| cCSAus |
|--------|


Drawings

Schematic diagram




Valve connector pin assignment, type A

Cable cross section




PUR halogen-free black [PUR]

Dimensional drawing



Valve connector, type A


Dimensional drawing



Valve connector, type A, side view

Sensor/Actuator cable - SAC-3P- 5,0-PUR/A - 1402984

Circuit diagram

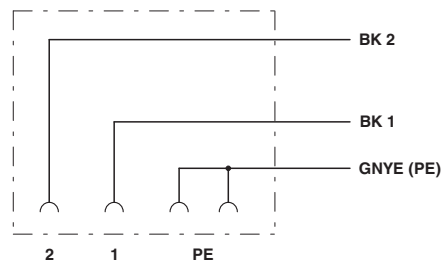

Contact assignment of the valve plug

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

| Product | Code | Reference | Product link |
|---|---------|-------------------|----------------------------|
| Sensor/Actuator cable, 3-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Valve connector A, Cable length: 5 m | 1402984 | SAC-3P- 5,0-PUR/A | Buy on EAN |