



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Monitoring relay - EMD-FL-RP-480 - 2900177

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Monitoring relay for effective power monitoring in 1- and 3-phase networks of 0...7.2 kW, underload, overload, window, motor winding temperature, error memory, supply voltage can be selected via power module, 2 PDTs

Product Description

Requirements pertaining to safety and system availability increase constantly – regardless of the industry. Processes are becoming more and more complex, not only in the mechanical engineering and chemical industry but also in system and automation technology. Demands on power engineering are also constantly on the rise. Error-free and therefore cost-effective operation can only be achieved through continuous monitoring of important network and system parameters. The electronic monitoring relays of the EMD series are available for various monitoring tasks. The operating states are indicated using colored LEDs, errors that may occur can be sent to a controller via a floating contact or can shut down a part of the system. Some device versions are equipped with startup and response delays in order to briefly tolerate measured values outside the set monitoring range.

Why buy this product

- Temperature monitoring of the motor winding
- Monitoring range up to 7.2 kW
- Variable supply voltage range
- Detection of switched off loads
- Separately adjustable startup and response delays



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 522632

Technical data

Dimensions

Width	45 mm
Height	90 mm
Depth	113 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
	-25 °C ... 40 °C (corresponds to UL 508)

Monitoring relay - EMD-FL-RP-480 - 2900177

Technical data

Ambient conditions

Ambient temperature (storage/transport)	-25 °C ... 70 °C
---	------------------

Input data

Nominal input voltage U_N	480 V (3 N ~ 480/277 V)
Input voltage range	0 V AC ... 480 V AC (1(N) ~, single-phase load)
	0 V AC ... 480 V AC (3(N) ~, 3-phase load)
Input current range	0.15 A ... 6 A (Range: 0.75 kW and 1.5 kW)
	0.3 A ... 12 A (Range: 3 kW and 6 kW)
Overload capacity	12 A permanent
Maximum temperature coefficient	≤ 0.02 %/K
Function	Underload, overload, window, winding temperature monitoring
Min. setting range	5 % ... 110 % (of P_N)
Max. setting range	10 % ... 120 % (of P_N)
Setting range for response delay	0.1 s ... 50 s
Setting range for starting delay	1 s ... 100 s
Basic accuracy	± 2 % (of scale end value)
Setting accuracy	≤ 5 % (of scale end value)
Repeat accuracy	± 2 %
Total cold resistance	< 1.5 k Ω
Response value	≥ 3.6 k Ω (Relay drops out)
Release value	≤ 1.8 k Ω (Relay picks up)
Recovery time	500 ms

Contact side

Contact type	2 floating PDT contacts
Maximum switching voltage	250 V AC (in acc. with IEC 60664-1)
Interrupting rating (ohmic load) max.	750 VA (3 A/250 V AC, module aligned, ≤ 5 mm spacing)
	1250 VA (5 A/250 V AC, module not aligned, ≥ 5 mm spacing)
Output fuse	5 A (fast-blow)

Power supply

Supply voltage range	110 V AC ... 500 V AC (see Power modules)
----------------------	---

General

Mechanical service life	Approx. 2×10^7 cycles
Operating mode	100% operating factor
Mounting position	any
Assembly instructions	on standard DIN rail NS 35 in accordance with EN 60715
Overvoltage category	III, basic insulation (as per EN 50178)
Housing insulation material	Polyamide PA, self-extinguishing
Color	green
Rated insulation voltage	300 V (According to EN 50178)
Conformance	CE-compliant

Monitoring relay - EMD-FL-RP-480 - 2900177

Technical data

General

UL, USA / Canada	UL applied for
------------------	----------------

Connection data

Conductor cross section flexible min.	0.25 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section solid min.	0.5 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section AWG min.	20
Conductor cross section AWG max.	14
Stripping length	8 mm
Connection method	Screw connection

Standards and Regulations

Conformance	CE-compliant
UL, USA / Canada	UL applied for

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27371802
eCl@ss 5.1	27371802
eCl@ss 6.0	27371806
eCl@ss 7.0	27371806
eCl@ss 8.0	27371806

ETIM

ETIM 3.0	EC001440
ETIM 4.0	EC001440
ETIM 5.0	EC001443

UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121535
UNSPSC 11	39121535
UNSPSC 12.01	39121535
UNSPSC 13.2	39121535

Approvals

Approvals

Monitoring relay - EMD-FL-RP-480 - 2900177

Approvals

Approvals

EAC

Ex Approvals


Approvals submitted

Approval details

EAC

Drawings

Block diagram

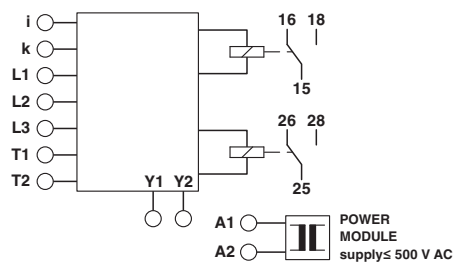

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Automatización Eléctrica
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Monitoring relay for effective power monitoring in 1- and 3-phase networks of 0...7.2 kW, underload, overload, window, motor winding temperature, error memory, supply voltage can be selected via power module, 2 PDTs	2900177	EMD-FL-RP-480	Buy on EAN