



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

## Front adapters - VIP-PA-PWR/20XOE/ 6,0M/S7 - 2904728

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VIP power cabling, universal front adapter for connection to all popular 20-pos. SIMATIC S7-300 I/O modules, via 20 individual wires in rope structure, not assembled (field connection, e.g., via 20 modular terminal blocks), cable length: 6 m

### Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 881999

### Technical data

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 80 °C

#### General

Nominal voltage $U_N$	$\leq 250$ V AC/DC
Max. permissible current	6 A (per single wire at 40°C) 4 A (per single wire at 60°C)
Max. permissible total current	20 A (per cable at 40 °C) 16 A (per cable at 60°C)
Mounting position	any
Nominal operating mode	100% operating factor
Degree of protection	IP20
Standards/regulations	DIN EN 50178 IEC 60664 IEC 62103
Rated insulation voltage	260 V
Rated surge voltage	2.3 kV (basic insulation)
Overvoltage category	II

#### Connection data 1

Connection name	Controller level
Connection method	Can be plugged onto 20-pin I/O Modules

#### Connection data 2

## Front adapters - VIP-PA-PWR/20XOE/ 6,0M/S7 - 2904728

### Technical data

#### Connection data 2

Connection name	Field level
Connection method	open cable end
Number of connections	20
Number of positions	1

#### Cable

Individual wires per module	16
Single wire, material	Cu uninsulated
Single wire, cross section	0.5 mm <sup>2</sup>
External diameter	9 mm
Length of cable	6 m
Max. conductor resistance	≤ 39 Ω/km

#### Supported controller

Controller	SIEMENS S7-300 / ET 200 M
- suitable I/O card	6ES7 321-1BH02-0AA0
	6ES7 321-1BH10-0AA0
	6ES7 321-7BH01-0AB0
	6ES7 321-1BH50-0AA0
	6ES7 321-1CH20-0AA0
	6ES7 321-1FH00-0AA0
	6ES7 321-1FF01-0AA0
	6ES7 322-1FL00-0AA0
	6ES7 322-1BH01-0AA0
	6ES7 322-1BH10-0AA0
	6ES7 322-1FH00-0AA0
	6ES7 322-1BF01-0AA0
	6ES7 322-8BF00-0AB0
	6ES7 322-1CF00-0AA0
	6ES7 322-1FF01-0AA0
	6ES7 322-1HH01-0AA0
	6ES7 322-1HF01-0AA0
	6ES7 323-1BH01-0AA0
	6ES7 327-1BH00-0AB0
	6ES7 331-7HF01-0AB0
	6ES7 331-7KF02-0AB0
	6ES7 331-7KB02-0AB0
	6ES7 332-7ND02-0AB0
	6ES7 332-5HD01-0AB0
	6ES7 332-5HB01-0AB0
	6ES7 334-0CE01-0AA0
	6ES7 334-0KE00-0AB0

# Front adapters - VIP-PA-PWR/20XOE/ 6,0M/S7 - 2904728

## Technical data

### Supported controller

	6ES7 331-7TF01-0AB0
	6ES7 332-8TF01-0AB0
	6ES7 336-4GE00-0AB0

### Standards and Regulations

Standards/regulations	DIN EN 50178
	IEC 60664
	IEC 62103
Overvoltage category	II

## Classifications

### eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	27249205

### ETIM


ETIM 4.0	EC000237
ETIM 5.0	EC000237

### UNSPSC

UNSPSC 6.01	26121620
UNSPSC 7.0901	26121620
UNSPSC 11	26121620
UNSPSC 12.01	26121620
UNSPSC 13.2	26121620

## Drawings

Circuit diagram

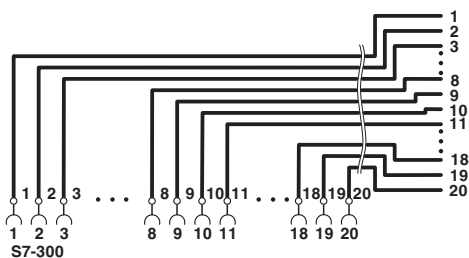

---

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
VIP power cabling, universal front adapter for connection to all popular 20-pos. SIMATIC S7-300 I/O modules, via 20 individual wires in rope structure, not assembled (field connection, e.g., via 20 modular terminal blocks), cable length: 6 m	2904728	VIP-PA-PWR/20XOE/6,0M/S7	<a href="#">Buy on EAN</a>