
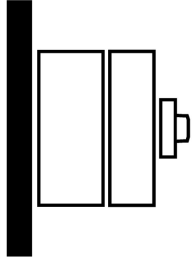


**Switch-disconnector, DMV, 1000 A, 3P + N (solid), Stop Function optional, Without rotary handle and drive shaft**



**Part no. DMV-1000N/1**  
**Catalog No. 1814446**

**Delivery program**

Product range			Switch-disconnector Main switch maintenance switch
Part group reference			DMV
Stop Function			optional
			Without rotary handle and drive shaft
<b>Notes</b>			visible contacts
Information about equipment supplied			auxiliary contact fitted by user. including connection materials
Number of poles			3P + N (solid)
<b>Auxiliary contacts</b>			
		N/O	0
		N/C	0
Degree of Protection			IP00 IP20 with terminal cover
Design			surface mounting
			
Contact sequence			
<b>Motor rating AC-23A, 50 - 60 Hz</b>			
400 V	P	kW	425
Rated uninterrupted current	I <sub>u</sub>	A	1000
Note on rated uninterrupted current I <sub>u</sub>			Rated uninterrupted current I <sub>u</sub> is specified for max. cross-section.

**Technical data**

<b>General</b>			
Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204 Switch-disconnector according to IEC/EN 60947-3
Certifications			CE, RoHs, KEMA, EAC, Lloyds
Ambient temperature			
Operation	θ	°C	-25 - +55
Storage	θ	°C	-30 - +80
Overvoltage category/pollution degree			III/3
Rated impulse withstand voltage	U <sub>imp</sub>	kV	12
Rated insulation voltage	U <sub>i</sub>	V	1000
Mounting position			As required
<b>Contacts</b>			
Mechanical variables			

Number of poles			3P + N (solid)
Auxiliary contacts			
		N/O	0
		N/C	0
<b>Electrical characteristics</b>			
Rated operational voltage	$U_e$	V AC	690
Rated uninterrupted current	$I_u$	A	1000
Note on rated uninterrupted current $I_u$			Rated uninterrupted current $I_u$ is specified for max. cross-section.
<b>Short-circuit rating</b>			
fuse			1000/630
Rated conditional short-circuit current	$I_q$	kA	$I_n = 1000: 50$ $I_n = 630: 100$
Breaking current		kA	$I_n = 1000: 70$ $I_n = 630: 65$
max. let-through energy		$kA^2s$	$I_n = 1000: 4200$ $I_n = 630: 3200$
Rated short-time withstand current (1 s current)	$I_{cw}$	$A_{rms}$	36000
Note on rated short-time withstand current $I_{cw}$			Current for a time of 0.3 seconds
Heat dissipation per pole, current-dependent	$P_{vid}$	W	44.75

### Switching capacity

Rated breaking capacity $\cos \phi$ to IEC 60947-3		A	
400/415 V		A	6072
500 V		A	4600
690 V		A	3496
<b>Safe isolation to EN 61140</b>			
Current heat loss per contact at $I_e$		W	44.75
Lifespan, mechanical	Operations		5000
<b>AC</b>			
<b>AC-21A</b>			
Rated operational current switch			
400 V 415 V	$I_e$	A	1000
500 V	$I_e$	A	1000
690 V	$I_e$	A	1000
<b>AC-22A</b>			
Rated operational current switch			
400 V 415 V	$I_e$	A	1000
500 V	$I_e$	A	1000
690 V	$I_e$	A	1000
<b>AC-23A</b>			
Rated operational current switch			
400 V 415 V	$I_e$	A	759
500 V	$I_e$	A	575
690 V	$I_e$	A	437
Motor rating AC-23A, 50 - 60 Hz			
400 V 415 V	P	kW	425
500 V	P	kW	425
690 V	P	kW	425

### Terminal capacities

Flat conductor connection with busbars		$mm^2$	600
Terminal screw			M12 x 35
Tightening torque for terminal screw		Nm	28

### Technical safety parameters:

<b>Notes</b>			B10 <sub>d</sub> values as per EN ISO 13849-1, table C1
--------------	--	--	---

## Design verification as per IEC/EN 61439

Technical data for design verification			
--	--	--	--


Rated operational current for specified heat dissipation	$I_n$	A	1000
Heat dissipation per pole, current-dependent	$P_{vid}$	W	44.75
Equipment heat dissipation, current-dependent	$P_{vid}$	W	0
Static heat dissipation, non-current-dependent	$P_{vs}$	W	0
Heat dissipation capacity	$P_{diss}$	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

## Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Switch disconnecter (EC000216)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Switch disconnecter (ec1@ss10.0.1-27-37-14-03 [AKF060013])			
Version as main switch			Yes
Version as maintenance-/service switch			Yes
Version as safety switch			No
Version as emergency stop installation			Yes
Version as reversing switch			No
Number of switches			1
Max. rated operation voltage $U_e$ AC		V	690
Rated operating voltage		V	690 - 690
Rated permanent current $I_u$		A	1000
Rated permanent current at AC-23, 400 V		A	759
Rated permanent current at AC-21, 400 V		A	1000
Rated operation power at AC-3, 400 V		kW	0
Rated short-time withstand current $I_{cw}$		kA	36
Rated operation power at AC-23, 400 V		kW	425
Switching power at 400 V		kW	375
Conditioned rated short-circuit current $I_q$		kA	100

Number of poles	3
Number of auxiliary contacts as normally closed contact	0
Number of auxiliary contacts as normally open contact	0
Number of auxiliary contacts as change-over contact	0
Motor drive optional	No
Motor drive integrated	No
Voltage release optional	No
Device construction	Complete device in housing
Suitable for ground mounting	Yes
Suitable for front mounting 4-hole	No
Suitable for front mounting centre	No
Suitable for distribution board installation	Yes
Suitable for intermediate mounting	No
Colour control element	Other
Type of control element	Other
Interlockable	No
Type of electrical connection of main circuit	Screw connection
Degree of protection (IP), front side	IP20
Degree of protection (NEMA)	Other

## Dimensions

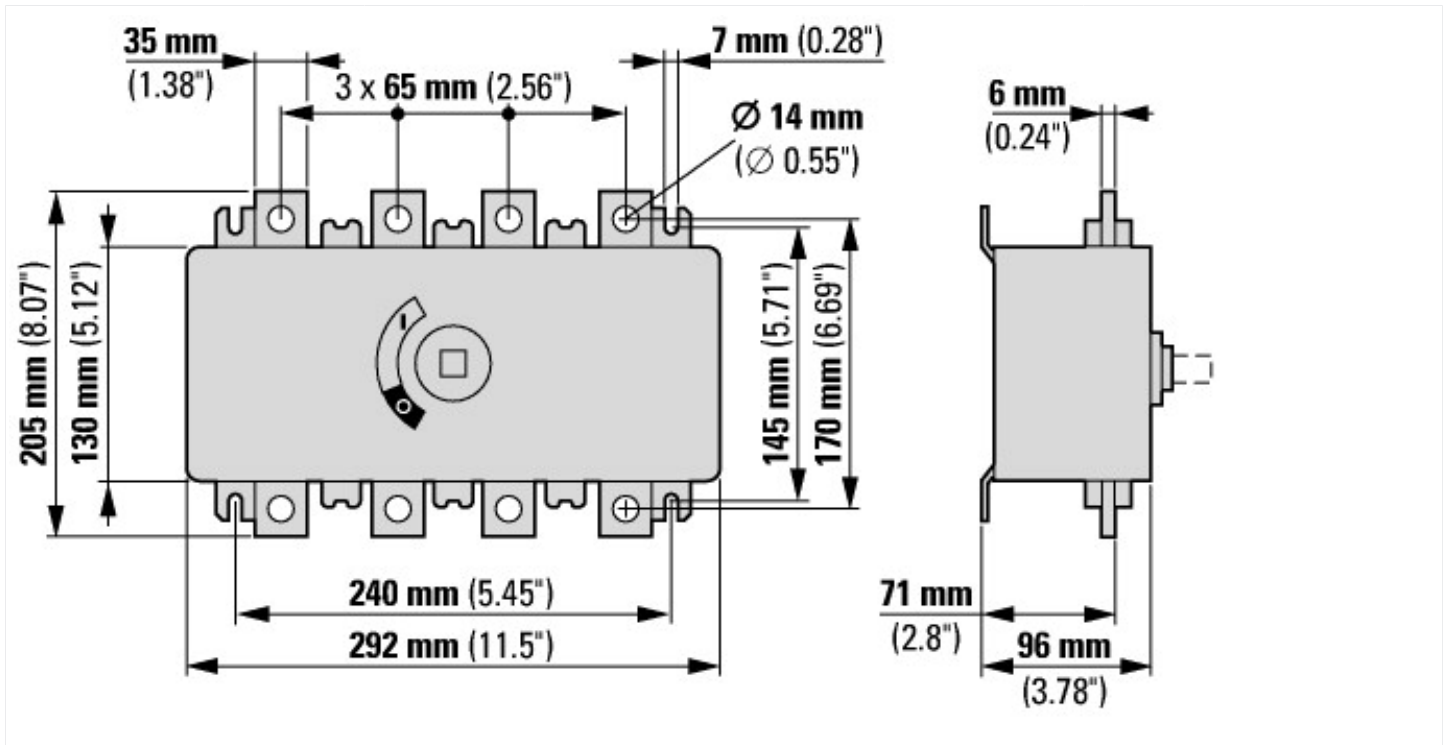

## Additional product information (links)

IL008008Z Switch-disconnectors

IL008008Z Switch-disconnectors

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL008008ZU2018\\_05.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL008008ZU2018_05.pdf)