




**Contactors, 3 pole, 380 V 400 V 18.5 kW, 190 V 50 Hz, 220 V 60 Hz, AC operation, Screw terminals**

**Part no. DILM40(190V50HZ,220V60HZ)**  
**Catalog No. 277764**  
**Alternate Catalog No. XTCE040D00G**

### Delivery program

|   |                |    |   |   |
|---|----------------|----|---|---|
| Product range   |                |    | 3 | Contactors  |
| Application   |                |    |   | Contactors for Motors   |
| Subrange  |                |    |   | Contactors up to 170 A, 3 pole  |
| Utilization category                                      |                |    |   | AC-1: Non-inductive or slightly inductive loads, resistance furnaces<br>AC-3/AC-3e: Normal AC induction motors: Starting, switching off while running<br>AC-4: Normal AC induction motors: starting, plugging, reversing, inching |
|   |                |    |   |   |
| Notes   |                |    |   | Also suitable for motors with efficiency class IE3.<br>IE3-ready devices are identified by the logo on their packaging.   |
| Connection technique                                      |                |    |   | Screw terminals   |
| Number of poles   |                |    |   | 3 pole  |
| <b>Rated operational current</b>                          |                |    |   |   |
| AC-3  |                |    |   |   |
| Notes   |                |    |   | At maximum permissible ambient temperature (open.)<br>Also tested according to AC-3e.   |
| 380 V 400 V   | $I_e$          | A  |   | 40  |
| AC-1  |                |    |   |   |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |    |   |   |
| Open  |                |    |   |   |
| at 40 °C  | $I_{th} = I_e$ | A  |   | 60  |
| enclosed  | $I_{th}$       | A  |   | 45  |
| Conventional free air thermal current, 1 pole             |                |    |   |   |
| open  | $I_{th}$       | A  |   | 125   |
| enclosed  | $I_{th}$       | A  |   | 112   |
| <b>Max. rating for three-phase motors, 50 - 60 Hz</b>     |                |    |   |   |
| AC-3  |                |    |   |   |
| 220 V 230 V   | P              | kW |   | 12.5  |
| 380 V 400 V   | P              | kW |   | 18.5  |
| 660 V 690 V   | P              | kW |   | 23  |
| AC-4  |                |    |   |   |
| 220 V 230 V   | P              | kW |   | 5   |
| 380 V 400 V   | P              | kW |   | 9   |
| 660 V 690 V   | P              | kW |   | 12  |
| Contact sequence  |                |    |   |   |
| <b>Instructions</b>                                       |                |    |   | Contacts to EN 50 012.  |
| Can be combined with auxiliary contact                    |                |    |   | DILM150-XHI(V)...<br>DILM1000-XHI(V)...   |
| Actuating voltage   |                |    |   | 190 V 50 Hz, 220 V 60 Hz  |
| Voltage AC/DC   |                |    |   | AC operation  |
| Connection to SmartWire-DT                                |                |    |   | no  |
| Frame size  |                |    |   | 3   |

## Technical data

### General

|   |                                     |               |  |
|---|-------------------------------------|---------------|--|
| Standards   |                                     |               | IEC/EN 60947, VDE 0660, UL, CSA  |
| Lifespan, mechanical  |                                     |               |  |
| AC operated   | Operations                          | $\times 10^6$ | 10   |
| Operating frequency, mechanical                                       |                                     |               |  |
| AC operated   | Operations/h                        |               | 5000   |
| Climatic proofing   |                                     |               | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30     |
| Ambient temperature   |                                     |               |  |
| Open  | °C                                  |               | -25 - +60  |
| Enclosed  | °C                                  |               | - 25 - 40  |
| Storage   | °C                                  |               | - 40 - 80  |
| Mounting position   |                                     |               |  |
| Mechanical shock resistance (IEC/EN 60068-2-27)                       |                                     |               |  |
| Half-sinusoidal shock, 10 ms  |                                     |               |  |
| Main contacts   |                                     |               |  |
| N/O contact   | g                                   |               | 10   |
| Auxiliary contacts  |                                     |               |  |
| N/O contact   | g                                   |               | 7  |
| N/C contact   | g                                   |               | 5  |
| Mechanical shock resistance (IEC/EN 60068-2-27) when tabletop-mounted |                                     |               |  |
| Half-sinusoidal shock, 10 ms  |                                     |               |  |
| Main contacts   |                                     |               |  |
| N/O contact   | g                                   |               | 10   |
| Auxiliary contacts  |                                     |               |  |
| N/O contact   | g                                   |               | 7  |
| N/C contact   | g                                   |               | 5  |
| Degree of Protection  |                                     |               | IP00   |
| Protection against direct contact when actuated from front (EN 50274) |                                     |               | Finger and back-of-hand proof  |
| Altitude  | m                                   |               | Max. 2000  |
| Weight  |                                     |               |  |
| AC operated   | kg                                  |               | 0.872  |
| Screw connector terminals   |                                     |               |  |
| Terminal capacity main cable  |                                     |               |  |
| Solid   | mm <sup>2</sup>                     |               | 1 x (0.75 - 16)<br>2 x (0.75 - 16)   |
| Flexible with ferrule   | mm <sup>2</sup>                     |               | 1 x (0.75 - 35)<br>2 x (0.75 - 25)   |
| Stranded  | mm <sup>2</sup>                     |               | 1 x (16 - 50)<br>2 x (16 - 35)   |
| Solid or stranded   | AWG                                 |               | single 14 - 1, double 14 - 2   |
| Flat conductor  | Lamellenzahl<br>x Breite x<br>Dicke | mm            | 2 x (6 x 9 x 0.8)  |
| Stripping length  | mm                                  |               | 14   |
| Terminal screw  |                                     |               | M6   |
| Tightening torque   | Nm                                  |               | 3.3  |
| Tool  |                                     |               |  |
| Pozidriv screwdriver  | Size                                |               | 2  |
| Standard screwdriver  | mm                                  |               | 0.8 x 5.5<br>1 x 6   |
| Terminal capacity control circuit cables                              |                                     |               |  |

|                       |  |                 |                                      |
|-----------------------|--|-----------------|--------------------------------------|
| Solid                 |  | mm <sup>2</sup> | 1 x (0.75 - 4)<br>2 x (0.75 - 2.5)   |
| Flexible with ferrule |  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5) |
| Solid or stranded     |  | AWG             | 18 - 14                              |
| Stripping length      |  | mm              | 10                                   |
| Terminal screw        |  |                 | M3.5                                 |
| Tightening torque     |  | Nm              | 1.2                                  |
| Tool                  |  |                 |                                      |
| Pozidriv screwdriver  |  | Size            | 2                                    |
| Standard screwdriver  |  | mm              | 0.8 x 5.5<br>1 x 6                   |

### Main conducting paths

|  |             |      |       |
|--|-------------|------|-------|
| Rated impulse withstand voltage        | $U_{imp}$   | V AC | 8000  |
| Overvoltage category/pollution degree  |             |      | III/3 |
| Rated insulation voltage               | $U_i$       | V AC | 690   |
| Rated operational voltage              | $U_e$       | V AC | 690   |
| Safe isolation to EN 61140             |             |      |       |
| between coil and contacts              |             | V AC | 440   |
| between the contacts                   |             | V AC | 440   |
| Making capacity (p.f. to IEC/EN 60947) |             |      |       |
|  | Up to 690 V | A    | 560   |
| Breaking capacity                      |             |      |       |
| 220 V 230 V                            |             | A    | 400   |
| 380 V 400 V                            |             | A    | 400   |
| 500 V                                  |             | A    | 400   |
| 660 V 690 V                            |             | A    | 250   |
| Short-circuit rating                   |             |      |       |
| Short-circuit protection maximum fuse  |             |      |       |
| Type "2" coordination                  |             |      |       |
| 400 V                                  | gG/gL 500 V | A    | 63    |
| 690 V                                  | gG/gL 690 V | A    | 50    |
| Type "1" coordination                  |             |      |       |
| 400 V                                  | gG/gL 500 V | A    | 125   |
| 690 V                                  | gG/gL 690 V | A    | 80    |

### AC

|   |                |   |   |
|---|----------------|---|---|
| AC-1  |                |   |   |
| Rated operational current                                 |                |   |   |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |   |   |
| Open  |                |   |   |
| at 40 °C  | $I_{th} = I_e$ | A | 60  |
| at 50 °C  | $I_{th} = I_e$ | A | 57  |
| at 55 °C  | $I_{th} = I_e$ | A | 55  |
| at 60 °C  | $I_{th} = I_e$ | A | 50  |
| enclosed  | $I_{th}$       | A | 45  |
| Conventional free air thermal current, 1 pole             |                |   |   |
| open  | $I_{th}$       | A | 125   |
| enclosed  | $I_{th}$       | A | 112   |
| AC-3  |                |   |   |
| Rated operational current                                 |                |   |   |
| Open, 3-pole: 50 – 60 Hz                                  |                |   |   |
| Notes   |                |   | At maximum permissible ambient temperature (open.)<br>Also tested according to AC-3e. |
| 220 V 230 V   | $I_e$          | A | 40  |
| 240 V   | $I_e$          | A | 40  |
| 380 V 400 V   | $I_e$          | A | 40  |

|                          |                |     |      |
|--------------------------|----------------|-----|------|
| 415 V                    | I <sub>e</sub> | A   | 40   |
| 440V                     | I <sub>e</sub> | A   | 40   |
| 500 V                    | I <sub>e</sub> | A   | 40   |
| 660 V 690 V              | I <sub>e</sub> | A   | 25   |
| 380 V 400 V              | I <sub>e</sub> | A   | 40   |
| Motor rating             | P              | kWh |      |
| 220 V 230 V              | P              | kW  | 12.5 |
| 240V                     | P              | kW  | 13.5 |
| 380 V 400 V              | P              | kW  | 18.5 |
| 415 V                    | P              | kW  | 24   |
| 440 V                    | P              | kW  | 25   |
| 500 V                    | P              | kW  | 28   |
| 660 V 690 V              | P              | kW  | 23   |
| <b>AC-4</b>              |                |     |      |
| Open, 3-pole: 50 – 60 Hz |                |     |      |
| 220 V 230 V              | I <sub>e</sub> | A   | 18   |
| 240 V                    | I <sub>e</sub> | A   | 18   |
| 380 V 400 V              | I <sub>e</sub> | A   | 18   |
| 415 V                    | I <sub>e</sub> | A   | 18   |
| 440 V                    | I <sub>e</sub> | A   | 18   |
| 500 V                    | I <sub>e</sub> | A   | 18   |
| 660 V 690 V              | I <sub>e</sub> | A   | 14   |
| Motor rating             | P              | kWh |      |
| 220 V 230 V              | P              | kW  | 5    |
| 240 V                    | P              | kW  | 5.5  |
| 380 V 400 V              | P              | kW  | 9    |
| 415 V                    | P              | kW  | 9.5  |
| 440 V                    | P              | kW  | 10   |
| 500 V                    | P              | kW  | 11   |
| 660 V 690 V              | P              | kW  | 12   |

## DC

|                                 |                |   |    |
|---------------------------------|----------------|---|----|
| Rated operational current, open |                |   |    |
| DC-1                            |                |   |    |
| 60 V                            | I <sub>e</sub> | A | 50 |
| 110 V                           | I <sub>e</sub> | A | 50 |
| 220 V                           | I <sub>e</sub> | A | 45 |

## Current heat loss

|   |  |    |      |
|---|--|----|------|
| 3 pole, at I <sub>th</sub> (60°)                  |  | W  | 10.3 |
| Current heat loss at I <sub>e</sub> to AC-3/400 V |  | W  | 6.6  |
| Impedance per pole                                |  | mΩ | 1.9  |

## Magnet systems

|  |          |                  |           |
|--|----------|------------------|-----------|
| Voltage tolerance  |          |                  |           |
| AC operated  | Pick-up  | x U <sub>c</sub> | 0.8 - 1.1 |
| Drop-out voltage AC operated   | Drop-out | x U <sub>c</sub> | 0.3 - 0.6 |
| Power consumption of the coil in a cold state and 1.0 x U <sub>S</sub> |          |                  |           |
| 50 Hz  | Pick-up  | VA               | 149       |
| 50 Hz  | Sealing  | VA               | 16        |
| 50 Hz  | Sealing  | W                | 4.1       |
| 60 Hz  | Pick-up  | VA               | 178       |
| 60 Hz  | Sealing  | VA               | 19        |
| 60 Hz  | Sealing  | W                | 4.1       |
| Duty factor  |          | % DF             | 100       |
| Changeover time at 100 % U <sub>S</sub> (recommended value)            |          |                  |           |
| Main contacts  |          |                  |           |

|               |    |         |
|---------------|----|---------|
| AC operated   |    |         |
| Closing delay | ms | 12 - 18 |
| Opening delay | ms | 8 - 13  |
| Arcing time   | ms | 10      |

### Electromagnetic compatibility (EMC)

|                       |  |               |
|-----------------------|--|---------------|
| Emitted interference  |  | to EN 60947-1 |
| Interference immunity |  | to EN 60947-1 |

### Rating data for approved types

|                                      |      |                 |
|--------------------------------------|------|-----------------|
| Switching capacity                   |      |                 |
| Maximum motor rating                 |      |                 |
| Three-phase                          |      |                 |
| 200 V<br>208 V                       | HP   | 10              |
| 230 V<br>240 V                       | HP   | 15              |
| 460 V<br>480 V                       | HP   | 30              |
| 575 V<br>600 V                       | HP   | 40              |
| Single-phase                         |      |                 |
| 115 V<br>120 V                       | HP   | 3               |
| 230 V<br>240 V                       | HP   | 7.5             |
| General use                          | A    | 63              |
| Short Circuit Current Rating         | SCCR |                 |
| Basic Rating                         |      |                 |
| SCCR                                 | kA   | 10              |
| max. Fuse                            | A    | 250             |
| max. CB                              | A    | 250             |
| 480 V High Fault                     |      |                 |
| SCCR (fuse)                          | kA   | 30/100          |
| max. Fuse                            | A    | 250/150 Class J |
| SCCR (CB)                            | kA   | 65              |
| max. CB                              | A    | 100             |
| 600 V High Fault                     |      |                 |
| SCCR (fuse)                          | kA   | 30/100          |
| max. Fuse                            | A    | 250/150 Class J |
| SCCR (CB)                            | kA   | 30              |
| max. CB                              | A    | 250             |
| Special Purpose Ratings              |      |                 |
| Electrical Discharge Lamps (Ballast) |      |                 |
| 480V 60Hz 3phase, 277V 60Hz 1phase   | A    | 79              |
| 600V 60Hz 3phase, 347V 60Hz 1phase   | A    | 79              |
| Incandescent Lamps (Tungsten)        |      |                 |
| 480V 60Hz 3phase, 277V 60Hz 1phase   | A    | 74              |
| 600V 60Hz 3phase, 347V 60Hz 1phase   | A    | 74              |
| Resistance Air Heating               |      |                 |
| 480V 60Hz 3phase, 277V 60Hz 1phase   | A    | 79              |
| 600V 60Hz 3phase, 347V 60Hz 1phase   | A    | 79              |
| Elevator Control                     |      |                 |
| 200V 60Hz 3phase                     | HP   | 7.5             |
| 200V 60Hz 3phase                     | A    | 25.3            |
| 240V 60Hz 3phase                     | HP   | 10              |
| 240V 60Hz 3phase                     | A    | 28              |
| 480V 60Hz 3phase                     | HP   | 25              |
| 480V 60Hz 3phase                     | A    | 34              |
| 600V 60Hz 3phase                     | HP   | 30              |

|                  |   |    |
|------------------|---|----|
| 600V 60Hz 3phase | A | 32 |
|------------------|---|----|

## Design verification as per IEC/EN 61439

| Technical data for design verification   |            |    |     |
|--|------------|----|-----|
| Rated operational current for specified heat dissipation   | $I_n$      | A  | 40  |
| Heat dissipation per pole, current-dependent   | $P_{vid}$  | W  | 2.2 |
| Equipment heat dissipation, current-dependent  | $P_{vid}$  | W  | 6.6 |
| Static heat dissipation, non-current-dependent   | $P_{vs}$   | W  | 4.1 |
| Heat dissipation capacity  | $P_{diss}$ | W  | 0   |
| Operating ambient temperature min.   |            | °C | -25 |
| Operating ambient temperature max.   |            | °C | 60  |
| IEC/EN 61439 design verification   |            |    |     |
| 10.2 Strength of materials and parts   |            |    |     |
| 10.2.2 Corrosion resistance  |            |    |     |
| 10.2.3.1 Verification of thermal stability of enclosures   |            |    |     |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |            |    |     |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |            |    |     |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |            |    |     |
| 10.2.5 Lifting   |            |    |     |
| 10.2.6 Mechanical impact   |            |    |     |
| 10.2.7 Inscriptions  |            |    |     |
| 10.3 Degree of protection of ASSEMBLIES  |            |    |     |
| 10.4 Clearances and creepage distances   |            |    |     |
| 10.5 Protection against electric shock   |            |    |     |
| 10.6 Incorporation of switching devices and components   |            |    |     |
| 10.7 Internal electrical circuits and connections  |            |    |     |
| 10.8 Connections for external conductors   |            |    |     |
| 10.9 Insulation properties   |            |    |     |
| 10.9.2 Power-frequency electric strength   |            |    |     |
| 10.9.3 Impulse withstand voltage   |            |    |     |
| 10.9.4 Testing of enclosures made of insulating material   |            |    |     |
| 10.10 Temperature rise   |            |    |     |
| 10.11 Short-circuit rating   |            |    |     |
| 10.12 Electromagnetic compatibility  |            |    |     |
| 10.13 Mechanical function  |            |    |     |

## Technical data ETIM 7.0


| Low-voltage industrial components (EG000017) / Power contactor, AC switching (EC000066)   |    |  |           |
|---|----|--|-----------|
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss10.0.1-27-37-10-03 [AAB718015]) |    |  |           |
| Rated control supply voltage $U_s$ at AC 50HZ   | V  |  | 190 - 190 |
| Rated control supply voltage $U_s$ at AC 60HZ   | V  |  | 220 - 220 |
| Rated control supply voltage $U_s$ at DC  | V  |  | 0 - 0     |
| Voltage type for actuating  |    |  | AC        |
| Rated operation current $I_e$ at AC-1, 400 V  | A  |  | 60        |
| Rated operation current $I_e$ at AC-3, 400 V  | A  |  | 40        |
| Rated operation power at AC-3, 400 V  | kW |  | 18.5      |
| Rated operation current $I_e$ at AC-4, 400 V  | A  |  | 18        |
| Rated operation power at AC-4, 400 V  | kW |  | 9         |
| Rated operation power NEMA  | kW |  | 22        |
| Modular version   |    |  | No        |
| Number of auxiliary contacts as normally open contact   |    |  | 0         |
| Number of auxiliary contacts as normally closed contact   |    |  | 0         |

|  |  |                  |
|--|--|------------------|
| Type of electrical connection of main circuit      |  | Screw connection |
| Number of normally closed contacts as main contact |  | 0                |
| Number of main contacts as normally open contact   |  | 3                |

## Approvals


|                                      |  |  |
|--------------------------------------|--|--|
| Product Standards                    |  | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking |
| UL File No.                          |  | E29096   |
| UL Category Control No.              |  | NLDX   |
| CSA File No.                         |  | 012528   |
| CSA Class No.                        |  | 2411-03, 3211-04   |
| North America Certification          |  | UL listed, CSA certified   |
| Specially designed for North America |  | No   |

## Characteristics

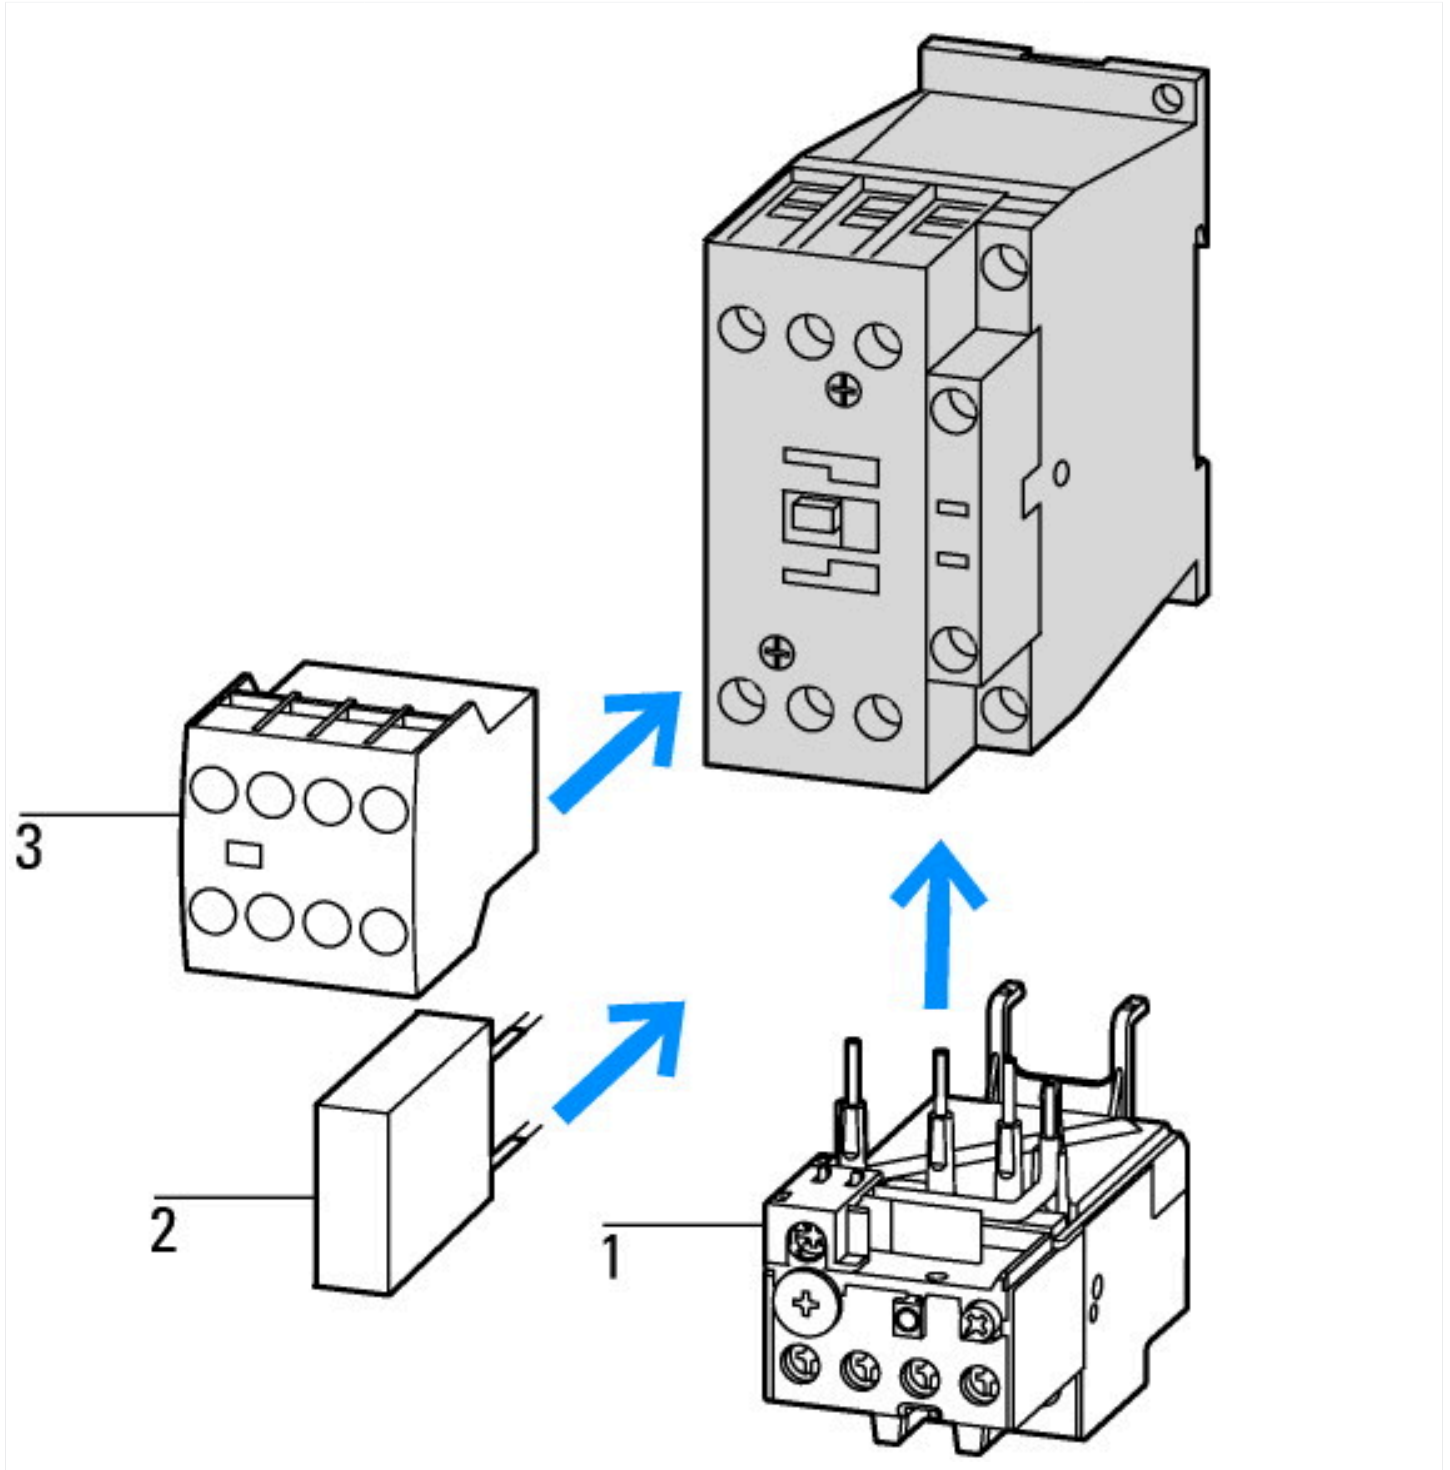

- 1: Overload relay
- 2: Suppressor
- 3: Auxiliary contact modules

# DILM1000-XHI(V)11-...

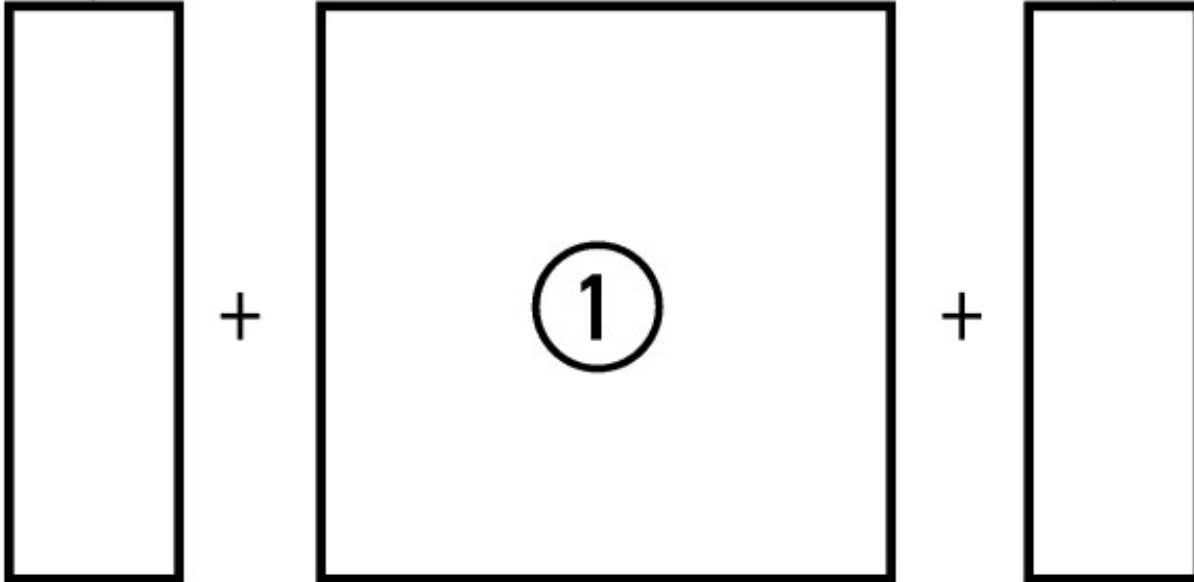

on the side: 2 x DILM1000-XHI(V)11-SI; surface mounting: 1 x DILM150-XHIA11  
 on the side: 2 x DILM1000-XHI(V)11-SA; surface mounting: 1 x DILM150-XHI (2 pole)  
 on the side: 1 x DILM1000-XHI(V)11-SI; surface mounting: 1 x DILM150-XHIA22  
 on the side: 1 x DILM1000-XHI(V)11-SA; surface mounting: 1 x DILM150-XHI (4 pole)





Squirrel-cage motor  
 Operating characteristics  
 Starting: from rest  
 Stopping: after attaining full running speed  
 Electrical characteristics  
 Make: up to 6 x rated motor current  
 Break: up to 1 x rated motor current  
 Utilization category  
 100 % AC-3  
 Typical applications  
 Compressors  
 Lifts  
 Mixers  
 Pumps  
 Escalators  
 Agitators  
 Fans  
 Conveyor belts  
 Centrifuges  
 Hinged flaps  
 Bucket-elevators  
 Air conditioning system  
 General drives in manufacturing and processing machines




Extreme switching duty  
 Squirrel-cage motor  
 Operating characteristics  
 Inching, plugging, reversing  
 Electrical characteristics  
 Make: up to 6 x rated motor current  
 Break: up to 6 x rated motor current  
 Utilization category  
 100 % AC-4  
 Typical applications  
 Printing presses  
 Wire-drawing machines  
 Centrifuges  
 Special drives for manufacturing and processing machines




Switching conditions for non-motor consumers, 3 pole, 4 pole  
 Operating characteristics  
 Non inductive and slightly inductive loads  
 Electrical characteristics  
 Switch on: 1 x rated operational current  
 Switch off: 1 x rated operational current  
 Utilization category  
 100 % AC-1  
 Typical examples of application  
 Electric heat

## Dimensions

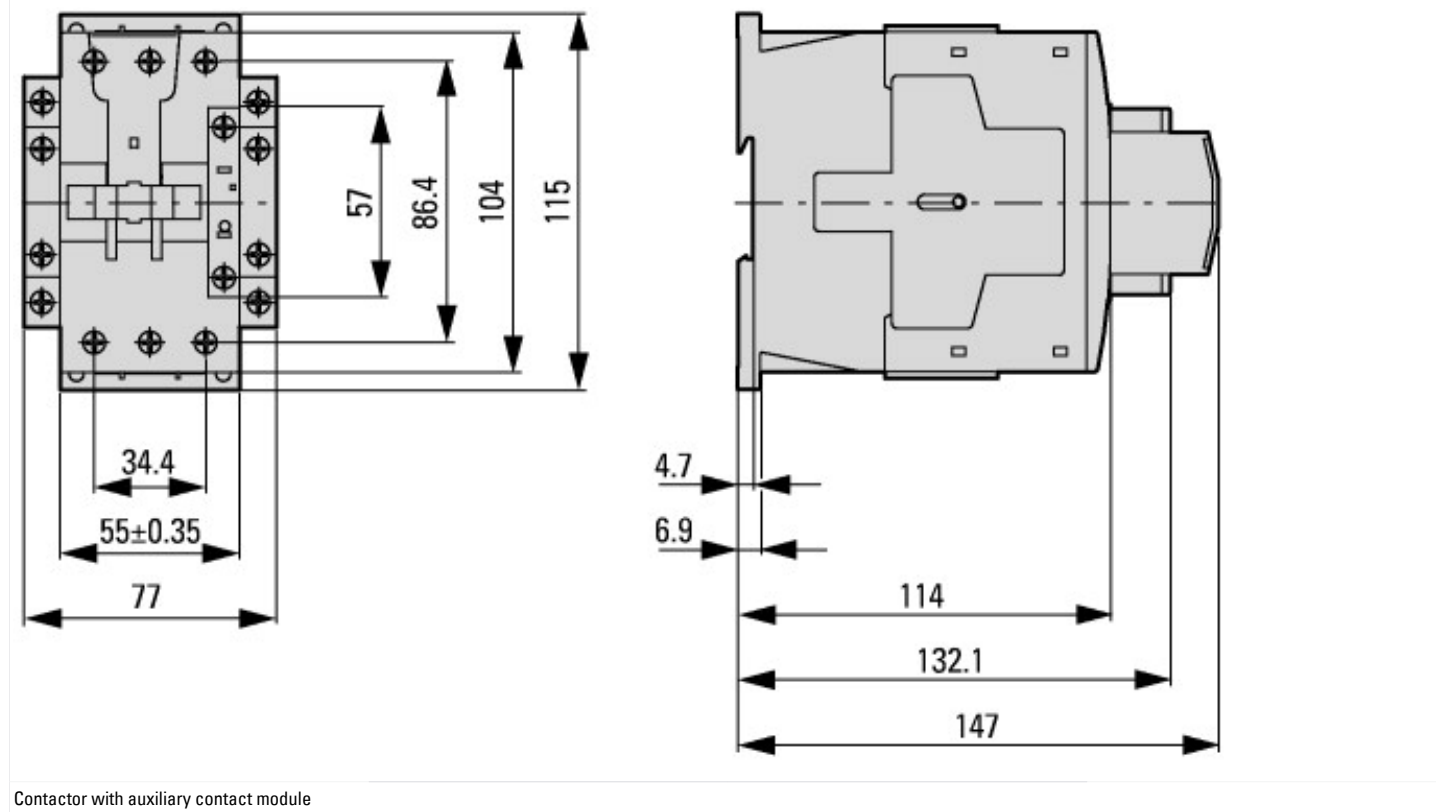

Contacteur avec module de contact auxiliaire

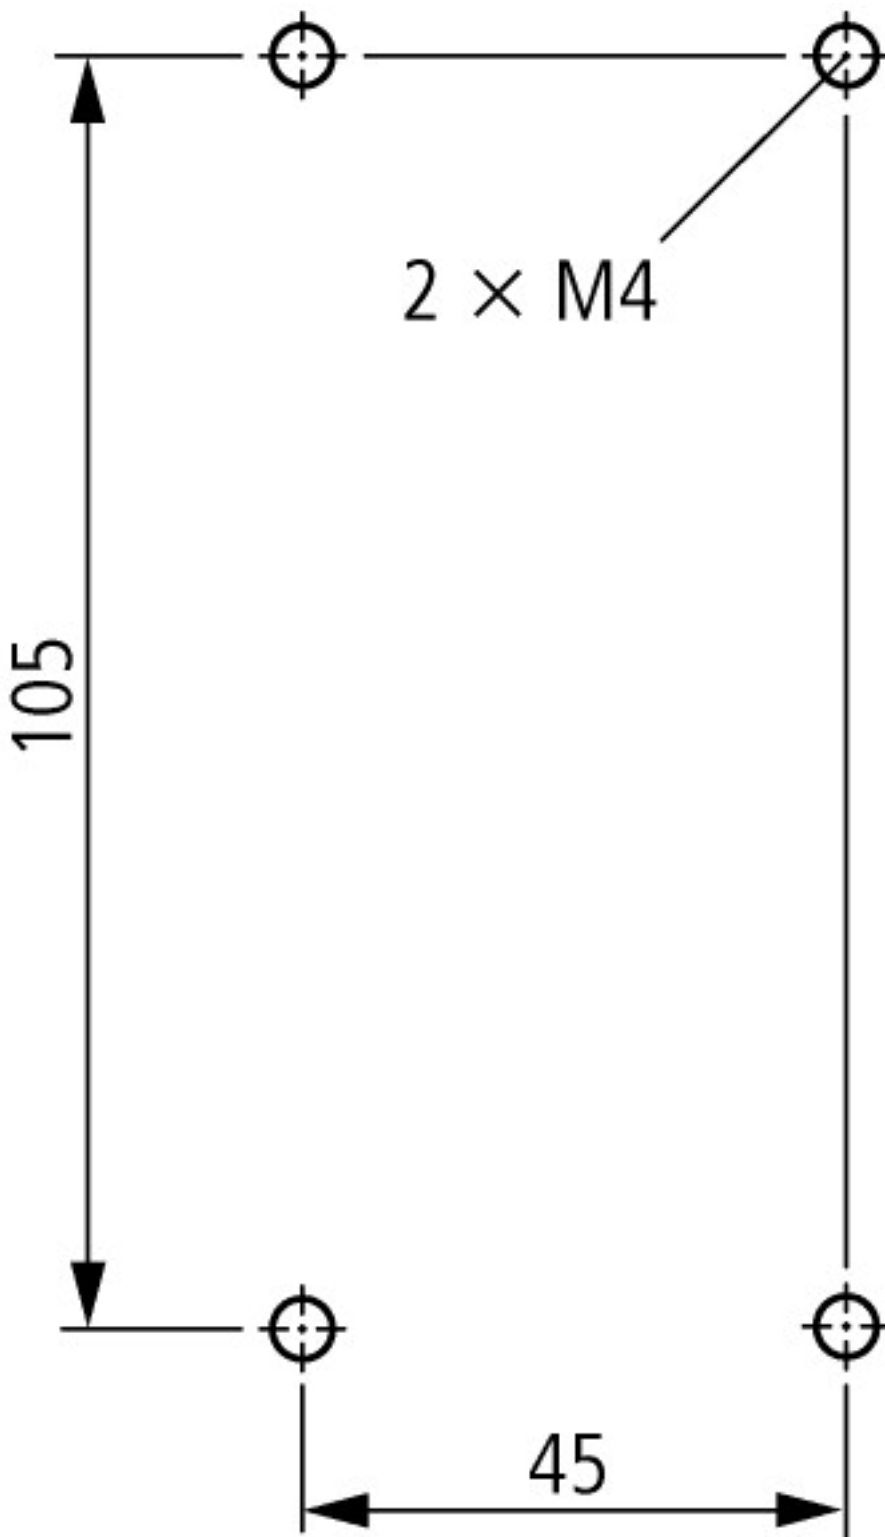

Lateral clearance to earthed parts: 6 mm

DILM40...DILM72  
 DILMC40...DILMC65  
 DILMF40...DILMF65

## Additional product information (links)

### IL03407033Z (AWA2100-2247) Contactor DILM, basic unit

|  |   |
|--|---|
| IL03407033Z (AWA2100-2247) Contactor DILM, basic unit  | <a href="https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407033Z2018_03.pdf">https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407033Z2018_03.pdf</a>                               |
| Motor starters and "Special Purpose Ratings" for the North American market                   | <a href="http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf">http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf</a> |
| Switchgear of Power Factor Correction Systems  | <a href="http://www.moeller.net/binary/ver_techpapers/ver934en.pdf">http://www.moeller.net/binary/ver_techpapers/ver934en.pdf</a>   |
| X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely               | <a href="http://www.moeller.net/binary/ver_techpapers/ver938en.pdf">http://www.moeller.net/binary/ver_techpapers/ver938en.pdf</a>   |
| Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions | <a href="http://www.moeller.net/binary/ver_techpapers/ver944en.pdf">http://www.moeller.net/binary/ver_techpapers/ver944en.pdf</a>   |

|  |   |
|--|---|
| Effect of the Cable Capacitance of Long Control Cables on the Actuation of Contactors          | <a href="http://www.moeller.net/binary/ver_techpapers/ver949en.pdf">http://www.moeller.net/binary/ver_techpapers/ver949en.pdf</a> |
| Switchgear for Luminaires  | <a href="http://www.moeller.net/binary/ver_techpapers/ver955en.pdf">http://www.moeller.net/binary/ver_techpapers/ver955en.pdf</a> |
| Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts | <a href="http://www.moeller.net/binary/ver_techpapers/ver956en.pdf">http://www.moeller.net/binary/ver_techpapers/ver956en.pdf</a> |
| The Interaction of Contactors with PLCs  | <a href="http://www.moeller.net/binary/ver_techpapers/ver957en.pdf">http://www.moeller.net/binary/ver_techpapers/ver957en.pdf</a> |
| Busbar Component Adapters for modern Industrial control panels                                 | <a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a> |