DATASHEET - BC-U-1/8-TW-ECO



ECO Compact distribution board, flush mounting, 1-rows, 8 MU, IP40

Powering Business Worldwide

BC-U-1/8-TW-ECO Part no. Catalog No. 281697

Delivery program

Delivery program		
Basic function		Basic device
Product function		Installation distribution boards
Product range		ECO DBO
Design		Flush mounted
Installation site		Indoor
Type of installation		Flush mounting
Door/Flap		White
Degree of Protection		IP40
Colour		White
Module rack		Single-rail
Shroud for protection against accidental contact		Plastic
Rows	Count	1
Module units per row		8
Description		IP40 Protection Class II Plastic housing white (RAL 9003)
Cable entries		Cable entry ribs on top and bottom
PE and N terminals design		Screw terminals
PE and N terminals	Number mm x cross- sectional area	n ² PE: 8 x 10 N: 8 x 10
Equipment supplied		Basic device Device support rails Neutral-/protective conductor terminal

Technical data

General

Standards			EN 62208_x
RoHS (in accordance with Directive 2002/95/EC of the European Parliament and Council)			conform
Ambient temperature		°C	-20 - +70
Degree of Protection			IP40
Protection class			II (totally insulated)
Rated operational voltage	Ue	V AC	400
Rated frequency	f	Hz	50
Material characteristics			
Material			ABS (plastic)
Colour			white (RAL 9003)

Material properties		
Mechanical		
Impact recistance		IKUE

Design verification as per IEC/EN 61439

IEC/EN 61439 design verification	
10.2 Strength of materials and parts	
10.2.2 Corrosion resistance	Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures	Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects	850 °C; meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation	Not relevant to indoor installations.

10.2.5 Lifting	Does not apply to enclosures without lifting aids.
10.2.6 Mechanical impact	IK05
10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	IP40
10.4 Clearances and creepage distances	Is the panel builder's responsibility.
10.5 Protection against electric shock	Protection class 2, therefore not applicable.
10.6 Incorporation of switching devices and components	Is the panel builder's responsibility.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	U _i = 400 V AC
10.9.3 Impulse withstand voltage	3.75 kV
10.9.4 Testing of enclosures made of insulating material	Meets the product standard's requirements.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility.
10.13 Mechanical function	Meets the product standard's requirements.


Technical data ETIM 7.0

Dietribution	hoards (FG000033)	Cmall distribution	board (ECOOO314)

Electric engineering, automation, process control engineering / Electrical installation, device / Electrical distribution system (incl. small distribution board) / Small distribution board (ept@ss10.01-27-14-24-09 [ACN387011])

(ecl@ss10.0.1-27-14-24-09 [ACN387011])			
Mounting method			Flush mounted (plaster)
Number of rows			1
Width in number of modular spacings			8
Type of cover			Door
Cover model			Closed
Transparent cover/door			No
Material housing			Plastic
Height	m	nm	195
Width	m	nm	195
Depth	m	nm	105
Built-in depth	m	nm	70
Internal depth	m	nm	98
DIN-rail			Yes
With mounting plate			No
Extension possible			No
EMC-version			No
Colour			White
RAL-number			9003
Degree of protection (IP)			IP40
With lock			No
Type of closure			Other

Dimensions

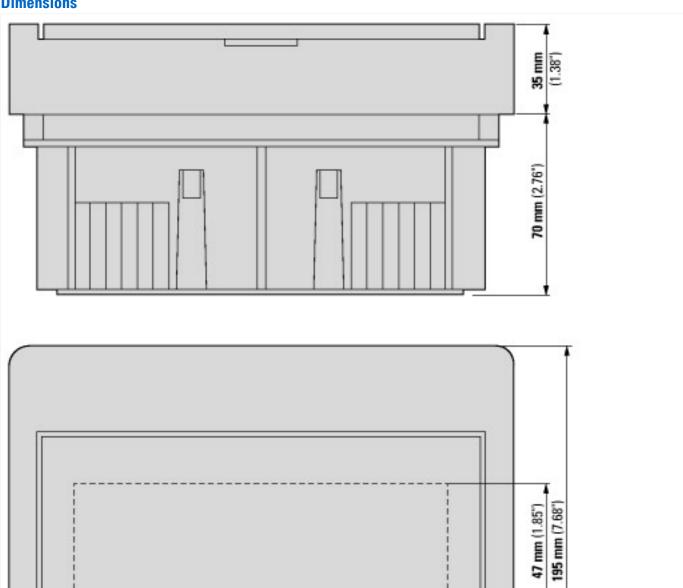

Additional product information (links)

IL014002Z ECO compact distribution board	
IL014002Z ECO compact distribution board	ftp://ftp.moeller.net/D0CUMENTATION/AWA_INSTRUCTIONS/IL014002ZU2014_02.pdf
Product overview (Web)	http://www.eaton.eu/DE/Europe/Electrical/ProductsServices/Residential/index.htm

144.5 mm (5.69") 195 mm (7.68")