






Step switches, TM, 10 A, centre mounting, 3 contact unit(s), Contacts: 6, 30 °, maintained, With 0 (Off) position, 0-6, design no. 8244



Part no. **TM-3-8244/EZ**  
 Catalog No. **045495**

**Delivery program**

|  |                |                 |   |
|--|----------------|-----------------|---|
| Product range                                      |                |                 | Control switches  |
| Part group reference                               |                |                 | TM  |
| Basic function                                     |                |                 | Step switches<br>with black thumb grip and front plate  |
| Contacts   |                |                 | 6   |
| Number of steps                                    |                |                 | 6 steps, 30°  |
| Degree of Protection                               |                |                 | Front IP65  |
| Design   |                |                 | centre mounting   |
| Contact sequence                                   |                |                 | <br> |
| Switching angle                                    |                | °               | 30  |
| Switching performance                              |                |                 | maintained<br>With 0 (Off) position   |
| Design number                                      |                |                 | 8244  |
| Front plate no.                                    |                |                 | <br><b>F 004</b>  |
| front plate  |                |                 | 0-6   |
| <b>Motor rating AC-23A, 50 - 60 Hz</b>             |                |                 |   |
| 400 V  | P              | kW              | 3   |
| Rated uninterrupted current                        | I <sub>u</sub> | A               | 10  |
| Note on rated uninterrupted current I <sub>u</sub> |                |                 | Rated uninterrupted current I <sub>u</sub> is specified for max. cross-section.   |
| Number of contact units                            |                | contact unit(s) | 3   |

**Technical data**

|                                       |                  |      |   |
|---------------------------------------|------------------|------|---|
| <b>General</b>                        |                  |      |   |
| Standards                             |                  |      | IEC/EN 60947, VDE 0660, CSA, UL<br>Control switch as per IEC/EN 60947-5-1<br>Auxiliary switch as per IEC/EN 60947-5-1 |
| Climatic proofing                     |                  |      | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30  |
| Ambient temperature                   |                  |      |   |
| Open                                  |                  | °C   | -25 - +50   |
| Overvoltage category/pollution degree |                  |      | III/3   |
| Rated impulse withstand voltage       | U <sub>imp</sub> | V AC | 4000  |

|                   |  |  |             |
|-------------------|--|--|-------------|
| Mounting position |  |  | As required |
|-------------------|--|--|-------------|

## Contacts

|   |       |         |  |
|---|-------|---------|--|
| Electrical characteristics                |       |         |  |
| Rated operational voltage                 | $U_e$ | V AC    | 500  |
| Rated uninterrupted current               | $I_u$ | A       | 10   |
| Note on rated uninterrupted current $I_u$ |       |         | Rated uninterrupted current $I_u$ is specified for max. cross-section. |
| Short-circuit rating                      |       |         |  |
| Fuse                                      |       | A gG/gL | 10   |

## Switching capacity

|  |                   |               |   |
|--|-------------------|---------------|---|
| Safe isolation to EN 61140                                     |                   |               |   |
| Current heat loss per contact at $I_e$                         |                   | W             | 0.15  |
| Current heat loss per auxiliary circuit at $I_e$ (AC-15/230 V) |                   | CO            | 0.15  |
| Lifespan, mechanical   | Operations        | $\times 10^6$ | > 1   |
| Maximum operating frequency                                    | Operations/h      |               | 1200  |
| AC   |                   |               |   |
| AC-21A   |                   |               |   |
| Rated operational current switch                               |                   |               |   |
| 400 V 415 V  | $I_e$             | A             | 10  |
| AC-23A   |                   |               |   |
| Motor rating AC-23A, 50 - 60 Hz                                | P                 | kW            |   |
| 400 V 415 V  | P                 | kW            | 3   |
| Control circuit reliability at 24 V DC, 10 mA                  | Fault probability | $H_F$         | $< 10^{-5}$ , < 1 failure in 100,000 switching operations |

## Terminal capacities

|                                      |  |                 |                    |
|--------------------------------------|--|-----------------|--------------------|
| Solid or stranded                    |  | mm <sup>2</sup> | 1 x 1,5<br>2 x 1,5 |
| Flexible with ferrules to DIN 46228  |  | mm <sup>2</sup> | 1 x 1.0<br>2 x 1.0 |
| Flexible                             |  | mm <sup>2</sup> | 1 x 1.5<br>2 x 1.5 |
| Terminal screw                       |  |                 | M2.5               |
| Tightening torque for terminal screw |  | Nm              | 0.4                |

## Rating data for approved types

|  |       |       |       |
|--|-------|-------|-------|
| Contacts                                 |       |       |       |
| Rated operational voltage                | $U_e$ | V AC  | 300   |
| Rated uninterrupted current max.         |       |       |       |
| Main conducting paths                    |       |       |       |
| General use                              |       | A     | 10    |
| Auxiliary contacts                       |       |       |       |
| General Use                              | $I_U$ | A     | 10    |
| Pilot Duty                               |       |       | A 300 |
| Switching capacity                       |       |       |       |
| Maximum motor rating                     |       |       |       |
| Single-phase                             |       |       |       |
| 120 V AC                                 |       | HP    | 0.33  |
| 240 V AC                                 |       | HP    | 0.75  |
| 277 V AC                                 |       | HP    | 0.75  |
| Three-phase                              |       |       |       |
| 120 V AC                                 |       | HP    | 0.75  |
| 240 V AC                                 |       | HP    | 1     |
| Terminal capacity                        |       |       |       |
| Solid or flexible conductor with ferrule |       | AWG   | 14    |
| Terminal screw                           |       |       | M2.5  |
| Tightening torque                        |       | lb-in | 3.5   |

## Design verification as per IEC/EN 61439

|  |  |  |  |
|--|--|--|--|
| Technical data for design verification |  |  |  |
|--|--|--|--|

|  |            |    |  |
|--|------------|----|--|
| Rated operational current for specified heat dissipation   | $I_n$      | A  | 10   |
| Heat dissipation per pole, current-dependent   | $P_{vid}$  | W  | 0.15   |
| Equipment heat dissipation, current-dependent  | $P_{vid}$  | W  | 0  |
| Static heat dissipation, non-current-dependent   | $P_{vs}$   | W  | 0  |
| Heat dissipation capacity  | $P_{diss}$ | W  | 0  |
| Operating ambient temperature min.   |            | °C | -25  |
| Operating ambient temperature max.   |            | °C | 50   |
| IEC/EN 61439 design verification   |            |    |  |
| 10.2 Strength of materials and parts   |            |    |  |
| 10.2.2 Corrosion resistance  |            |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |            |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |            |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |            |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |            |    | UV resistance only in connection with protective shield.   |
| 10.2.5 Lifting   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |            |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |            |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |            |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |            |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |            |    |  |
| 10.9.2 Power-frequency electric strength   |            |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |            |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |            |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |            |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |            |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0



|  |  |   |                 |
|--|--|---|-----------------|
| Low-voltage industrial components (EG000017) / Control switch (EC002611)   |  |   |                 |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Control switch (ecl@ss10.0.1-27-37-14-14 [ACN998011]) |  |   |                 |
| Type of switch   |  |   | Level switch    |
| Number of poles  |  |   | 1               |
| Max. rated operation voltage $U_e$ AC  |  | V | 500             |
| Rated permanent current $I_u$  |  | A | 10              |
| Number of switch positions   |  |   | 7               |
| With 0 (off) position  |  |   | Yes             |
| With retraction in 0-position  |  |   | No              |
| Device construction  |  |   | Built-in device |
| Width in number of modular spacings  |  |   | 0               |
| Suitable for ground mounting   |  |   | No              |
| Suitable for front mounting 4-hole   |  |   | Yes             |
| Suitable for distribution board installation   |  |   | No              |
| Suitable for intermediate mounting   |  |   | No              |
| Complete device in housing   |  |   | No              |
| Type of control element  |  |   | Toggle          |
| Front shield size  |  |   | 30x30 mm        |

|   |  |       |
|---|--|-------|
| Degree of protection (IP), front side   |  | IP65  |
| Degree of protection (NEMA), front side |  | Other |


## Approvals

|                             |  |   |
|-----------------------------|--|---|
| Product Standards           |  | UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94; IEC/EN 60947-3; CE marking |
| UL File No.                 |  | E36332  |
| UL Category Control No.     |  | NLRV  |
| CSA File No.                |  | UL report applies to both US and Canada                                   |
| North America Certification |  | UL listed, certified by UL for use in Canada                              |
| Degree of Protection        |  | IEC: IP65; UL/CSA Type: -   |

## Dimensions

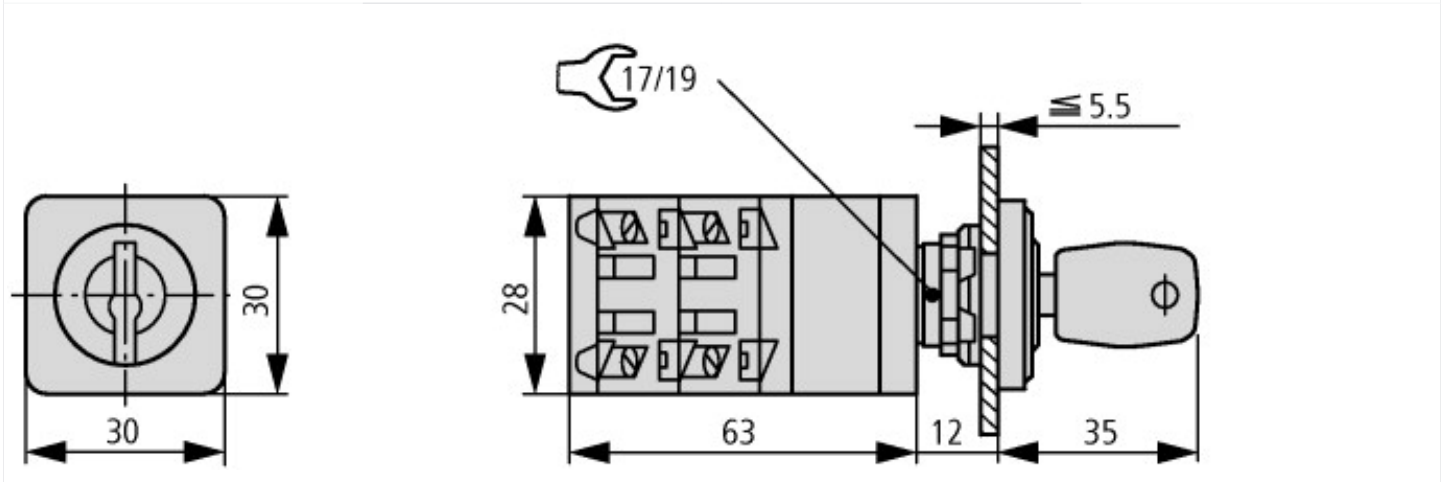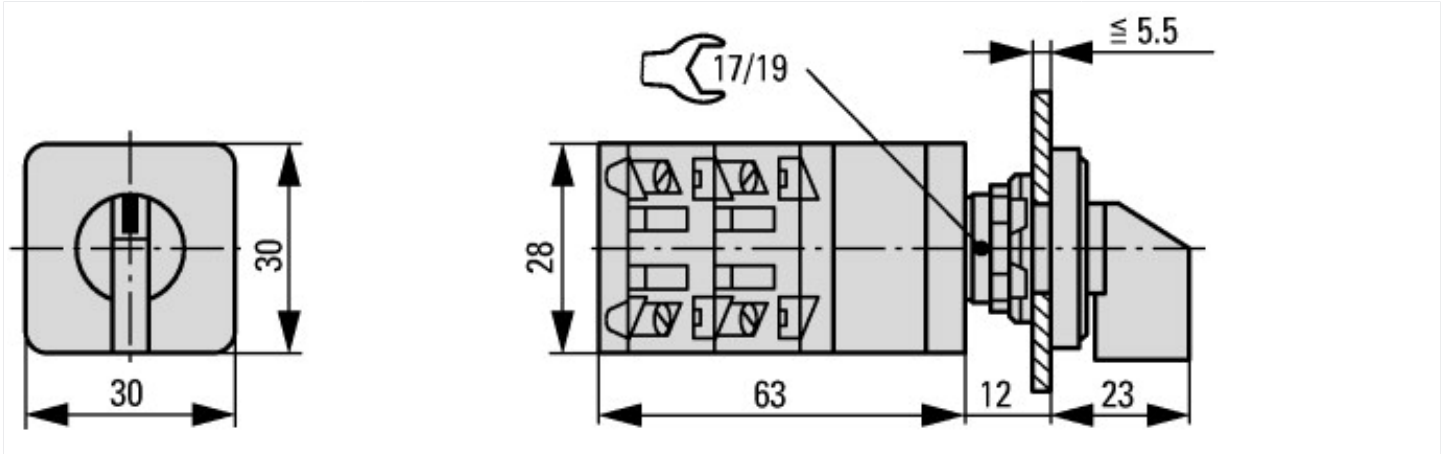

Key operation lock mechanism

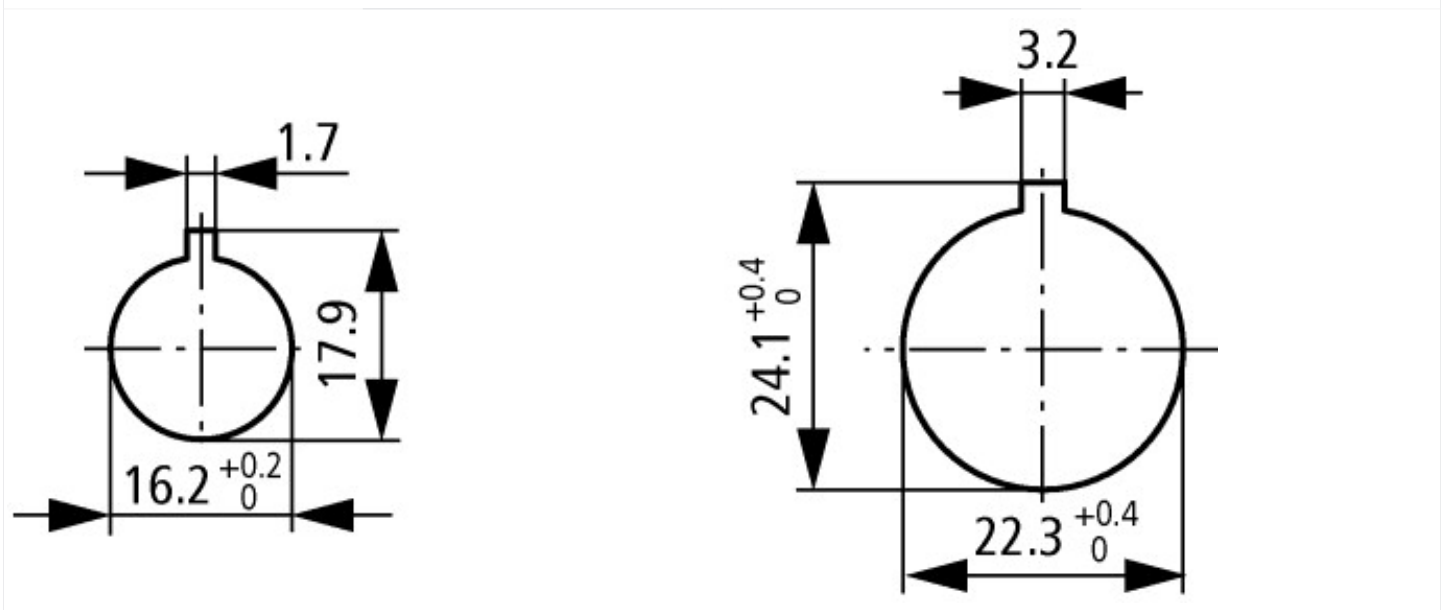

Door drilling dimensions

Drilling dimensions: either 16.2 mm = without reduction  $\triangle$  RMQ16 or 22.3 mm = with reduction  $\triangle$  RMQ Titan

## Additional product information (links)

|  |   |
|--|---|
| Display flip catalog page.                         | <a href="http://ecat.moeller.net/flip-cat/?edition=K115A&amp;startpage=167">http://ecat.moeller.net/flip-cat/?edition=K115A&amp;startpage=167</a>   |
| Technical overview cam switch, switch-disconnector | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.2">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.2</a>                                     |
| System overview cam switch T                       | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.4">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.4</a>                                     |
| System overview switch-disconnector P              | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.6">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.6</a>                                     |
| Key to part numbers Cam switch                     | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8</a>                                     |
| Key to part numbers Switch-disconnector            | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8</a>                                     |
| Switches for ATEX                                  | <a href="http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html">http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html</a> |