





**Trip block, 16 - 65 A, Motor protection, Connection to SmartWire-DT: yes,  
For use with: PKE65 basic device**




**Part no. PKE-XTUA-65**  
**Catalog No. 138260**  
**Alternate Catalog No. XTPEXTA065D**  
**EL-Nummer (Norway) 4355195**

**Delivery program**

Product range				Accessories
Accessories				Trip blocks
Basic function				Motor protection Motor protection for heavy starting duty
<b>Setting range</b>				
Overload releases				
				
Setting range of overload releases	$I_r$	A		16 - 65
				
Overload release, min.	$I_r$	A		16
Overload release, max.	$I_r$	A		65
Function				With overload release
Rated uninterrupted current = rated operational current	$I_u = I_e$	A		65
<b>Motor rating</b>				
AC-3				
220 V 230 V	P	kW		18.5
380 V 400 V	P	kW		30
440 V	P	kW		37
500 V	P	kW		45
660 V 690 V	P	kW		55
For use with				PKE65 basic device
Connection to SmartWire-DT				yes in conjunction with PKE-SWD-SP SmartWire DT PKE module
Motor output/rated motor current				
Motor rating	Rated motor current			
	AC-3			
	220 V	380 V	440 V	500 V
	230 V	400 V		690 V
	240 V	415 V		
P	I	I	I	I
kW	A	A	A	A
5.5	19.6	-	-	-
7.5	26.4	-	-	-
11	38	21.7	19.7	17.4
15	51	29.3	26.6	23.4
18.5	63	36	32.9	28.9
22	-	41	37.4	33
30	-	55	50.3	44
37	-	-	61.4	54
45	-	-	-	65
55	-	-	-	-

**Technical data**

<b>General</b>				
Standards				IEC/EN 60947, VDE 0660, UL, CSA
Climatic proofing				Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature				
Storage		°C		- 40 - 80

Open	°C	-25 - +55
Enclosed	°C	-25 - 40
Mounting position		
Direction of incoming supply		as required
Degree of protection		
Device		IP20
Terminations		IP00
Protection against direct contact when actuated from front (EN 50274)		Finger and back-of-hand proof
Mechanical shock resistance half-sinusoidal shock 10 ms to IEC 60068-2-27	g	15
Altitude	m	Max. 2000

### Main conducting paths

Rated impulse withstand voltage	$U_{imp}$	V AC	6000
Overvoltage category/pollution degree			III/3
Rated operational voltage	$U_e$	V AC	690
Rated uninterrupted current = rated operational current	$I_u = I_e$	A	65
Rated frequency	f	Hz	40 - 60
Max. operating frequency		Ops/h	60
Motor switching capacity			
AC-3 (up to 690V)		A	65
AC-4 cycle operation			
Minimum current flow times		ms	500 (Class 5) 700 (Class 10) 900 (Class 15) 1000 (Class 20)
Minimum cut-out periods		ms	500
Note		ms	In AC-4 cycle operation, going below the minimum current flow time can cause overheating of the load (motor). For all combinations with an SWD activation, you need not adhere to the minimum current flow times and minimum cut-out periods.

### Trip blocks

Temperature compensation			
to IEC/EN 60947, VDE 0660	°C	-5 ... 40	
Operating range	°C	-25 ... 55	
Setting range of overload releases	$x I_u$	0.25 - 1	
short-circuit release		Trip block, fixed: $15.5 \times I_r$ delayed approx. 60 ms	
Short-circuit release tolerance		$\pm 20\%$	
Phase-failure sensitivity		IEC/EN 60947-4-1, VDE 0660 Part 102	

### Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	$I_n$	A	65
Heat dissipation per pole, current-dependent	$P_{vid}$	W	3.1
Equipment heat dissipation, current-dependent	$P_{vid}$	W	9.3
Static heat dissipation, non-current-dependent	$P_{vs}$	W	0
Heat dissipation capacity	$P_{diss}$	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			
			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			
			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			
			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			
			Meets the product standard's requirements.

10.2.4 Resistance to ultra-violet (UV) radiation		Meets the product standard's requirements.
10.2.5 Lifting		Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact		Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions		Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES		Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances		Meets the product standard's requirements.
10.5 Protection against electric shock		Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components		Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections		Is the panel builder's responsibility.
10.8 Connections for external conductors		Is the panel builder's responsibility.
10.9 Insulation properties		
10.9.2 Power-frequency electric strength		Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


## Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Tripping bloc for power circuit-breaker (EC000617)		
Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Releasing block for circuit breakers (ecl@ss10.0.1-27-37-04-10 [AKF008013])		
Overload release current setting	A	16 - 65
Initial value of the undelayed short-circuit release - setting range	A	192
End value adjustment range undelayed short-circuit release	A	780
Rated permanent current I <sub>u</sub>	A	65
Voltage type for actuating		Self powered
Rated control supply voltage U <sub>s</sub> at AC 50HZ	V	0 - 0
Rated control supply voltage U <sub>s</sub> at AC 60HZ	V	0 - 0
Rated control supply voltage U <sub>s</sub> at DC	V	0 - 0
Number of poles		3
Short-circuit release function		Delayed
With ground fault protection function		No
Type of motor protection		Electronic release

## Approvals

Product Standards		UL 508; CSA-C22.2 No. 14-10; IEC60947-4-1; CE marking
UL File No.		E36332
UL Category Control No.		NLRV
CSA File No.		165628
CSA Class No.		3211-05
North America Certification		UL listed, CSA certified
Specially designed for North America		No

## Characteristics

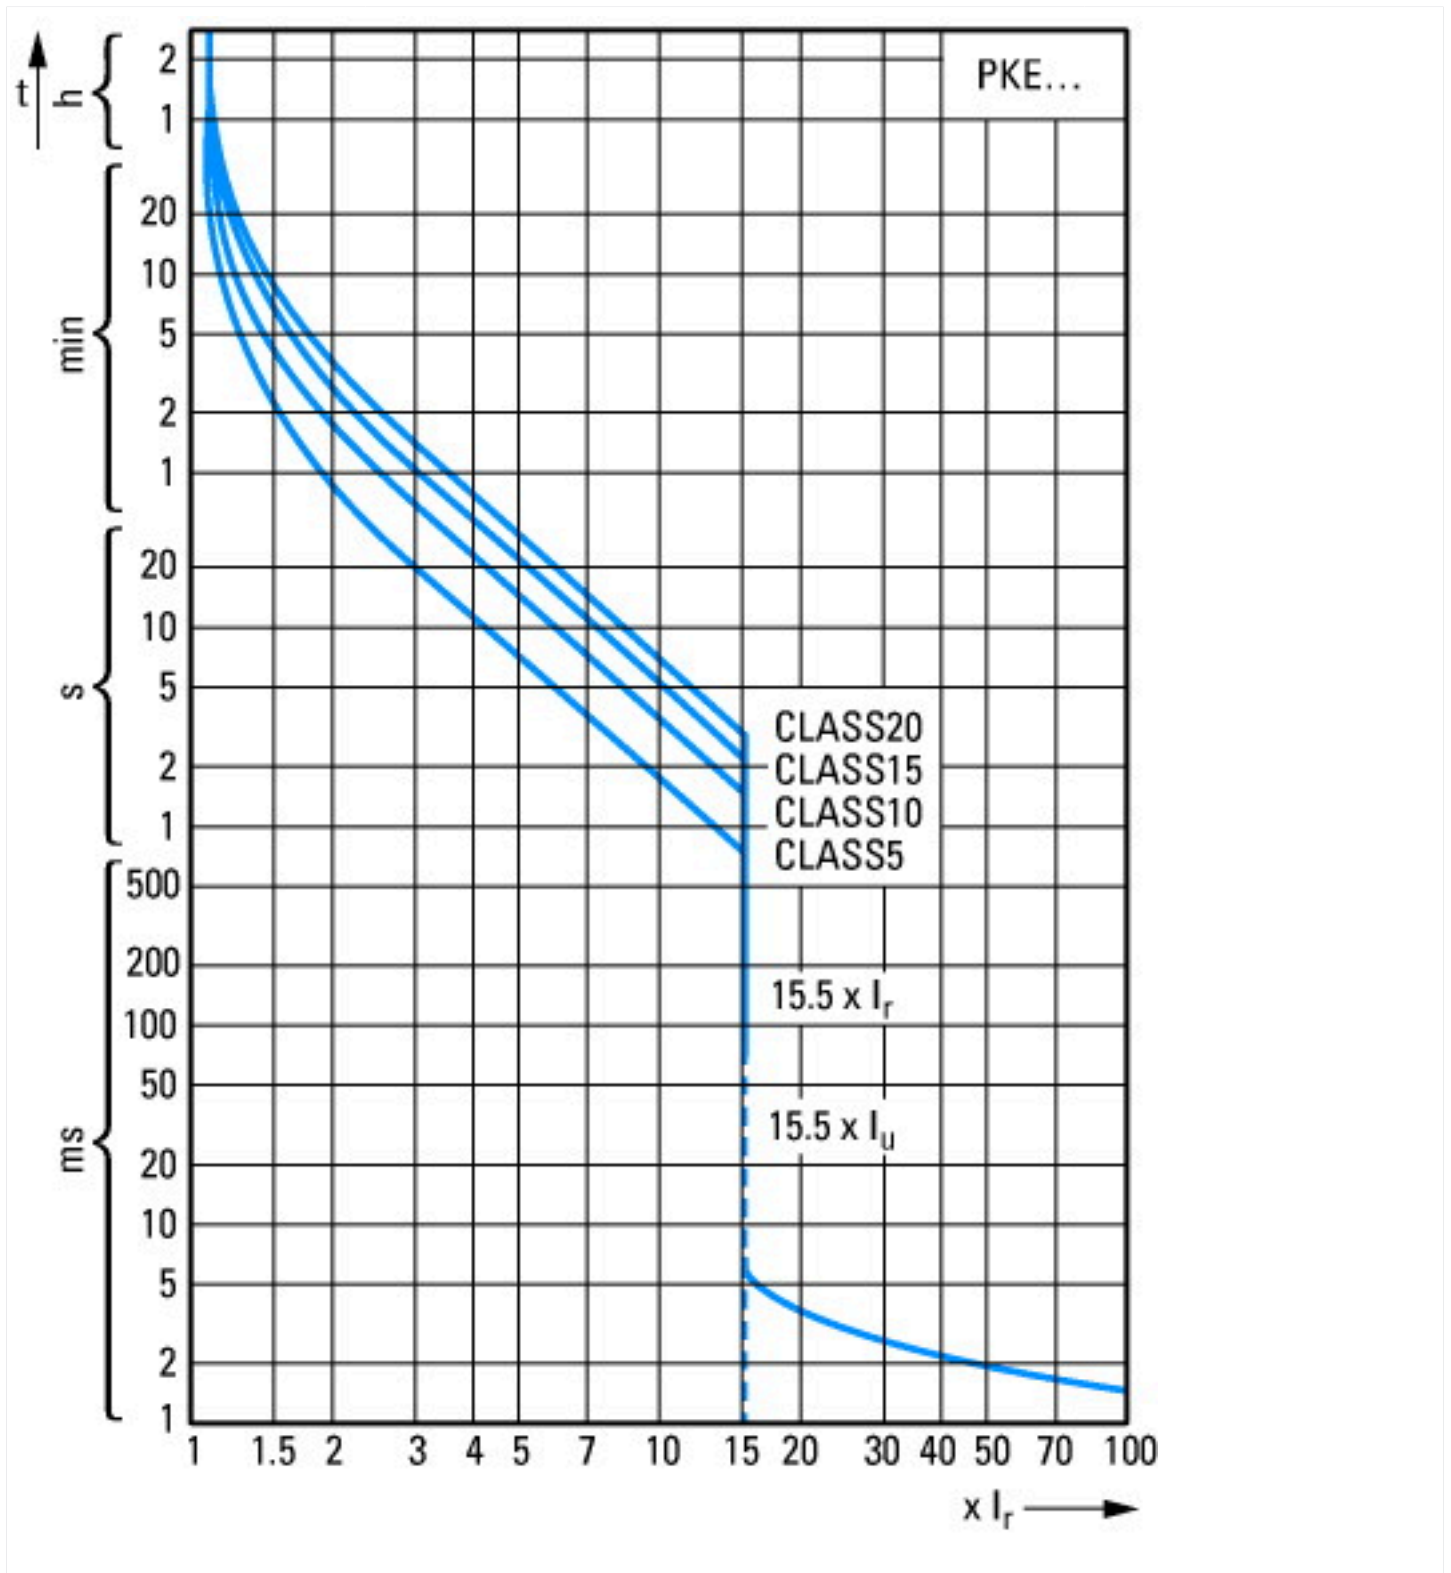

Tripping characteristics

### Additional product information (links)

Motor starters and "Special Purpose Ratings" for the North American market

[http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct\\_3258146.pdf](http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf)

Busbar Component Adapters for modern Industrial control panels

[http://www.moeller.net/binary/ver\\_techpapers/ver960en.pdf](http://www.moeller.net/binary/ver_techpapers/ver960en.pdf)