




**Automatización Eléctrica**

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

# Autotransformer AT3 25-24/35-4

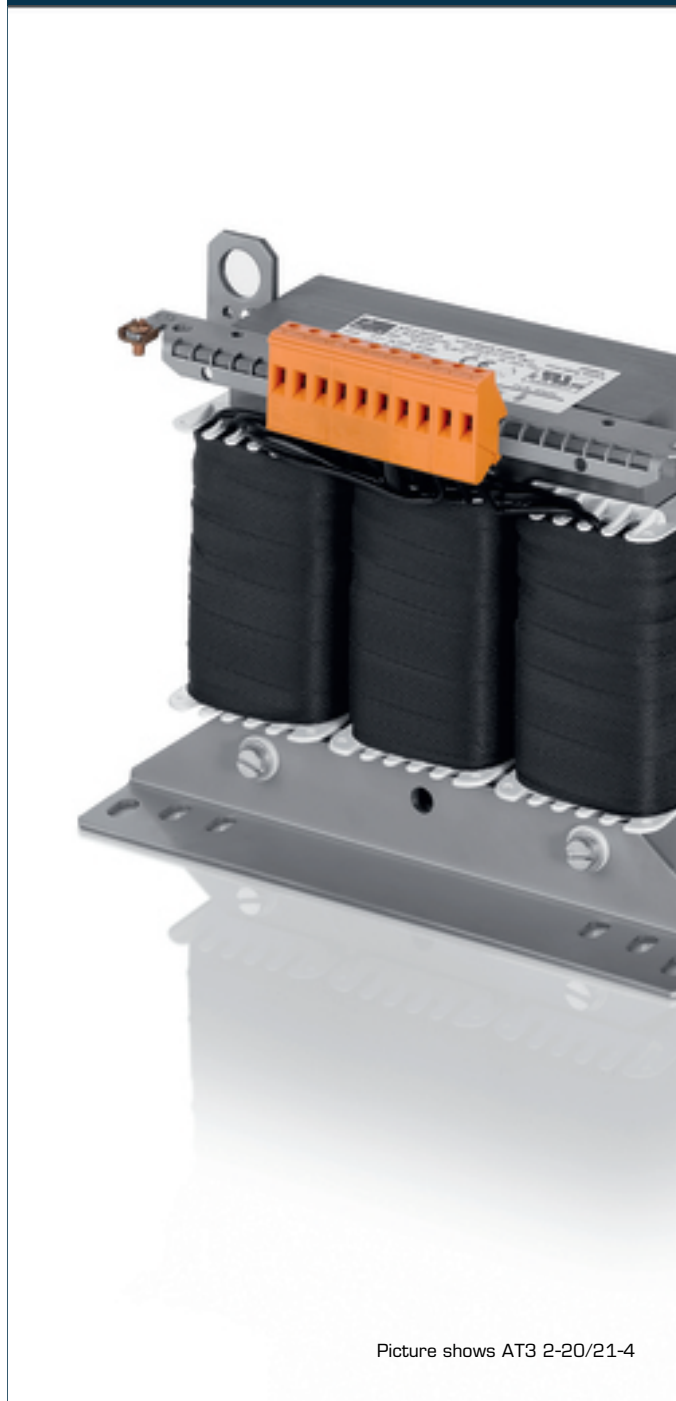

Picture shows AT3 2-20/21-4


## Advantages

- Low weight and small size (compared to isolating transformers)
- Very high efficiency
- Inverse operation possible
- Patented assembly technology to lower heat losses
- Very good corrosion protection and low noise thanks to BLOCKIMPEX vacuum impregnation
- Fixed, contact protected screw connection terminals complying with UVV BGV A3
- Multifunctional fixing rails with 12 oval slots
- Enlarged fixing rail for easy installation from above
- Integrated crane eyes

## Applications

Autotransformer for adjustment of the voltage on the input and output sides with no requirement for electrical isolation.

## Sample application

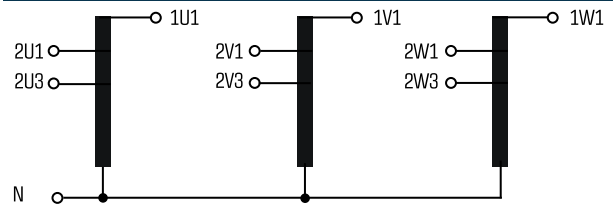

## Standards




Autotransformer  
to: VDE 0570 Teil 2-13, DIN EN 61558-2-13, EN 61558-2-13,  
IEC 61558-2-13, UL 5085-1/-2, CSA 22.2 No.66

## Approvals




UL 5085-1/-2, CSA 22.2 No.66



# Autotransformer AT3 25-24/35-4

Type		AT3 25-24/35-4
Electrical data	Input	
	Rated input voltage	3 x 240/346 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	3 x 400 Vac
	Rated Power	25000 VA
	Vector group	YNΔ0
	Efficiency	96 %
	Approvals	
	Approvals	cURus
Environment		
Ambient temperature max.	40 °C	
Safety and protection		
Type	Open type	
Class of Insulation System	F	
Protection index	IP 00	
Safety class (prepared)	I	
Short circuit strength	non-short-circuit proof	
Test voltage	4000 Vac, 50 Hz	
Order numbers		
<b>Order Number</b>	<b>AT3 25-24/35-4</b>	

Type		AT3 25-24/35-4
Mechanical data	Terminal and mounting	
	Fixing method	Fixing rail
	Fixing screws	M10
	Terminals	Screw-type terminals
	Measures and weights	
	Weight	83.40 kg
	Core type	3 UI 210/73

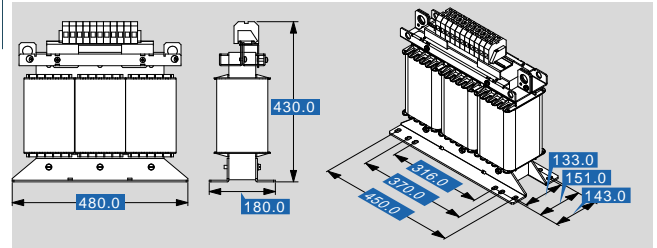



**Automatización Eléctrica**  
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Autotransformer PRI 3 x 200/208 - 3 x 690 Vac, SEC 2000 - 250000 VA, 3 x 400 Vac	AT32524354	AT3 25-24/35-4	<a href="#">Buy on EAN</a>