



**Automatización Eléctrica**

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

# Safety isolating transformer RTE 50/2x15



Picture shows RTE 100/2x12

## Advantages

Minimum size at high output
Low weight
Double output voltage for series or parallel connection
Protected against overload by integral temperature fuse
Minimal no-load losses
Outstanding temperature behaviour thanks to low magnetic leakage field
Very low noise field


## Applications

As a mains transformer for adjustment of the voltage and simple electrical isolation.

As an isolating transformer as specified in EN 61558-2-6 for the safe electrical isolation of the input and output sides. The transformer may be used to set up protective separation as a protective measure in accordance with VDE 0100.

As a safety isolating transformer as specified in EN 61558-2-6 for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

## Sample application

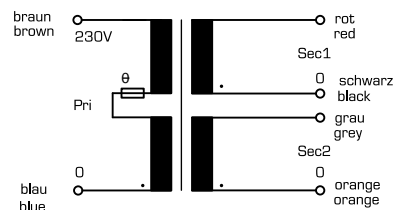

Parallelschaltung: rot mit grau / schwarz mit orange  
Parallel connection: red with grey / black with orange

Reihenschaltung: schwarz mit grau  
Series connection: black with grey

## Standards



Safety isolating transformer  
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6,  
UL 5085-1/-2, CSA 22.2 No.66

## Approvals



UL 5085-1/-2, CSA 22.2 No.66



## Safety isolating transformer RTE 50/2x15

Type		RTE 50/2x15
Electrical data	Input	
	Rated input voltage	230 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	2 x 15 Vac
	Rated Power	50 VA
	No-load voltage (app. x factor)	1.20
	No-load loss (typ.)	0.40 W
	Efficiency	82.5 %
	Standards	
	Classification	Safety isolating transformer
	Approvals	
	Approvals	cURus
	Environment	
	Ambient temperature max.	40 °C
	Safety and protection	
	Type	Open type
	Class of Insulation System	VDE=B, UL=class 105
	Protection index	IP 00
	Safety class (prepared)	II
Short circuit strength	non-short-circuit proof	
Test voltage	4000 Vac, 50 Hz	
Order numbers		
<b>Order Number</b>	<b>RTE 50/2x15</b>	

Type		RTE 50/2x15
Mechanical data	Terminal and mounting	
	Fixing method	Mounting kit, M6 bolt
	Terminals	Connecting leads, 200 mm
	Measures and weights	
	Major diameter Ø	77 mm
	Outside diameter in the area of the wire lead Ø	79 mm
	Height without mounting	39 mm
	Weight	0.68 kg



**Automatización Eléctrica**  
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Toroidal safety isolating and isolating transformer PRI 230 Vac, SEC 15 - 625 VA, 2 x 12 - 2 x 115 Vac	RTE502x15	RTE 50/2x15	<a href="#">Buy on EAN</a>