




Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Safety isolating transformer* Mains transformer (without VDE mark) VCM 16/2/6

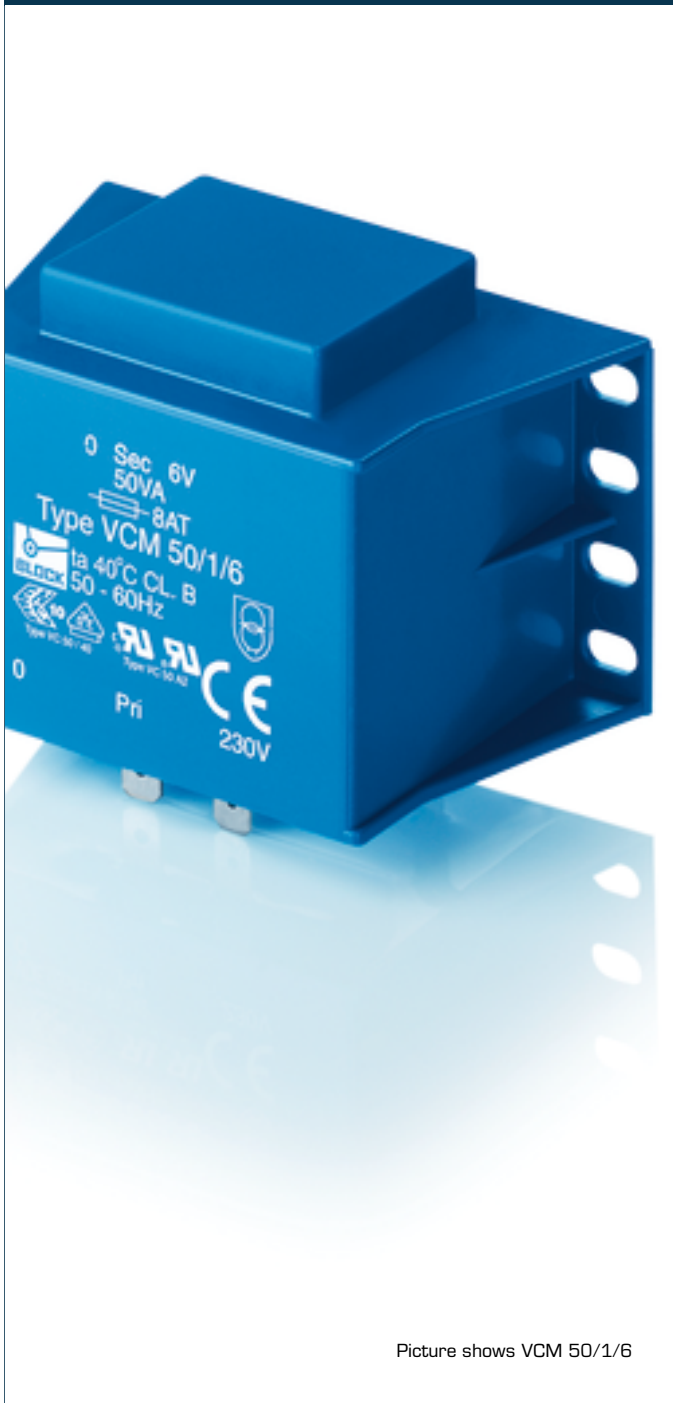

Picture shows VCM 50/1/6

Advantages


- Minimum size at high output
- Also with dual output voltage for series or parallel connection
- Permanent corrosion protection, high insulation value and maximum electrical reliability thanks to XtraDenseFill resin encapsulation
- Coil shell in 2-chamber technology
- Self-extinguishing potting material
- Additional mounting option with tabs on the housing

Applications

As a mains transformer for adjustment of the voltage and simple electrical isolation.

As a safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

Sample application



Standards



Safety isolating transformer
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6,
UL 5085-1/-2, CSA 22.2 No.66

Approvals




ENEC 10 (VDE), UL 5085-1/-2, CSA 22.2 No.66



Safety isolating transformer* Mains transformer (without VDE mark) VCM 16/2/6

| Type | | VCM 16/2/6 |
|----------------------------|---------------------------------|---|
| Electrical data | Input | |
| | Rated input voltage | 230 Vac |
| | Rated frequency | 50 - 60 Hz |
| | Output | |
| | Rated output voltage | 2 x 6 Vac |
| | Rated Power | 16.0 VA |
| | No-load voltage (app. x factor) | 1.24 |
| | No-load loss (typ.) | 1.80 W |
| | Efficiency | 76 % |
| | Standards | |
| | Classification | Safety isolating transformer * Mains transformer (without VDE mark) |
| | Approvals | |
| | Approvals | cURus, ENEC (VDE) |
| | Environment | |
| | Ambient temperature max. | 40 °C |
| Safety and protection | | |
| Type | Encapsulated | |
| Class of Insulation System | VDE=B, UL=class 105 | |
| Protection index | IP 00 | |
| Safety class (prepared) | II | |
| Short circuit strength | non-short-circuit proof | |
| Order numbers | | |
| Order Number | VCM 16/2/6 | |

| Type | | VCM 16/2/6 |
|----------------------|-----------------------|---------------------------|
| Mechanical data | Terminal and mounting | |
| | Fixing method | Fixing points on the case |
| | Terminals | Pins for PCB |
| Measures and weights | Pin (ø) | 0.8 mm |
| | Core type | EI 54/18,8 |
| | Weight | 0.42 kg |

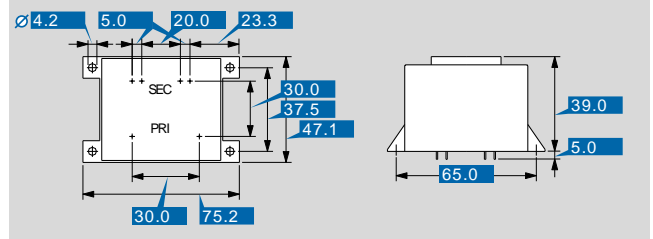

Subjects to change.

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

| Product | Code | Reference | Product link |
|---|-------------|------------------|----------------------------|
| PCB transformer, mountable encapsulated, with mounting brackets, PRI 230 Vac, SEC 3.2 - 16 VA, 6 - 24 Vac, 2 x 6 - 2 x 24 Vac | VCM1626 | VCM 16/2/6 | Buy on EAN |