

### LUXOMAT® AL21



Stainless  
steel





#### TECHNICAL DATA

- 230V~ ±10%
- 180°
- max. 12 m by walking across (tangential)
- IP44 / Class I / CEE
- L 182 x W 224 x H 356 mm
- 25°C to +50°C
- stainless-steel housing, shade made of real glass
- RC-AL20, IR-RC-Mini
- Lamps**
- max. 60 W – conventional lamp or E27 energy-saving lamp
- Channel 1 (light control)**
- 1000 W,  $\cos\varphi = 1$   
500 W,  $\cos\varphi = 0.5$
- 15 sec. - 16 min.
- 10 - 2000 Lux

#### PRODUCT INFORMATION

- Remotely controllable LUXOMAT® AL21 automatic light with 180° motion detector
- 180° anti-creep protection
- Possible to connect additional lights that are switched in precisely the same way as the master light
- Settings may be made manually with the potentiometer and remotely with the LUXOMAT® RC-AL20 infrared remote control
- Glass shade
- Wall installation
- **Application examples:** entrances, garages, patios, balconies, at entrance gates

- ▶ Wiring diagrams on page 79, 80!
- ▶ Remote controls on page 71!

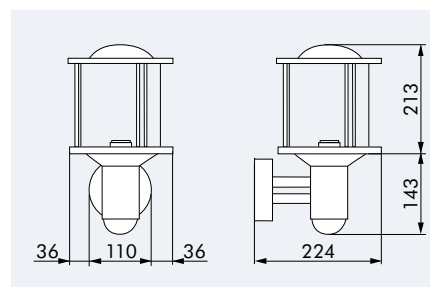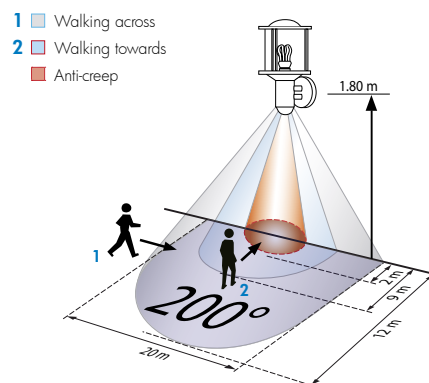

#### ACCESSORY (OPTIONAL)

RC-AL20

IR-RC-Mini



(to order  
separately)



(to order  
separately)

Energy and environment balance  
sheet see page 15

Description	Colour	Part number
AL21	Stainless steel	91731
<b>Accessory (optional)</b>		
LUXOMAT® RC-AL20	grey	92033
LUXOMAT® IR-RC-Mini	grey	92090