

### LUXOMAT® AL20-CdS-PL9

For 2G7 compact fluorescent lamps




black with globe Frankfurt



white



silver

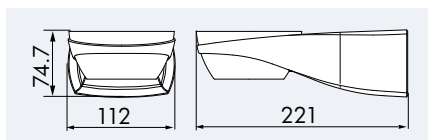

#### ■ TECHNICAL DATA

- ~ 230V ~ ±10%
- IP44 / Class II / CEE
- L 221 x W 112 x H 75 mm
- 25°C to +50°C
- made of high-quality and UV-resistant polycarbonate

#### Lamps

- 2G7 2G7 PL 5 - 9 W compact fluorescent lamp

#### Channel 1 (light control)

- 1000 W, cos φ = 1
- 500 W, cos φ = 0.5
- 10 - 2000 Lux

#### ■ System shades (see page 22)



#### i PRODUCT INFORMATION

- Automatic switching with built-in, continuously variable twilight switch
- System light lower sections LUXOMAT® AL20-CdS-PL9 SLS with electronic ballast and twilight switch (light sensor) for automatic switching on and off and for use with compact fluorescent lamps
- With 2G7 lamp fitting for 9 W compact energy saving lamps
- Freely combinable with 19 different System-Globes SG – see below!
- Wall or outer corner installation
- Special base for outer corner installation available as an accessory
- Time-saving single-handed plug-in base installation
- Possible to connect additional lights switched in precisely the same way as the master light
- **Application examples:** entrances, garages, patios, balconies, at entrance gates

▶ Wiring diagrams on page 79, 80!

#### ■ ACCESSORY (OPTIONAL)

AL20-ES corner base for outer corner installation



white

black

silver

Energy and environment balance sheet see page 15

Description	Colour	Part number
AL20-CdS-PL9 SLS	white	91717
AL20-CdS-PL9 SLS	black	91737
AL20-CdS-PL9 SLS	silver	91757
<b>Accessory (optional)</b>		
AL20-ES corner base	white	92425
AL20-ES corner base	black	92418
AL20-ES corner base	silver	92426