




**Automatización Eléctrica**

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)




- Features :
  - 3000VDC I/O isolation
  - Internal SMD technology
  - Built-in EMI filter
  - Protection: Short circuit
  - Cooling by free air convection
  - Non-conductive plastic case
  - Single in line package
  - 100% full load burn-in test
  - Low cost / High reliability
  - 2 years warranty



## SPECIFICATION

ORDER NO.	SPU03L-05	SPU03M-05	SPU03N-05	SPU03L-12	SPU03M-12	SPU03N-12	SPU03L-15	SPU03M-15	SPU03N-15		
OUTPUT	DC OUTPUT VOLTAGE	5V			12V			15V			
	CURRENT RANGE	60 ~ 600mA			25 ~ 250mA			20 ~ 200mA			
	EFFICIENCY (Typ.)	82%	83%	83%	85%	86%	86%	86%	86%	88%	
	RATED POWER	3W									
	RIPPLE & NOISE (max.) Note.2	50mVp-p									
	LINE REGULATION Note.3	±1.2% for 1% input variation									
	LOAD REGULATION Note.4	±8.0%									
	VOLTAGE ACCURACY	±2.0%									
SWITCHING FREQUENCY	60KHz min.										
INPUT	VOLTAGE RANGE	4.5 ~ 5.5V	10.8 ~ 13.2V	21.6 ~ 26.4V	4.5 ~ 5.5V	10.8 ~ 13.2V	21.6 ~ 26.4V	4.5 ~ 5.5V	10.8 ~ 13.2V	21.6 ~ 26.4V	
	NORMAL VOLTAGE	5V	12V	24V	5V	12V	24V	5V	12V	24V	
	INPUT CURRENT	Full load	740mA	305mA	155mA	715mA	300mA	150mA	705mA	300mA	145mA
		No load	60mA	25mA	15mA	65mA	25mA	15mA	65mA	30mA	15mA
	FILTER	Capacitor type									
PROTECTION	Fuse recommended										
PROTECTION	OVERLOAD	Momentary Protection type : Broken									
	SHORT CIRCUIT	Momentary Protection type : Broken									
ENVIRONMENT	WORKING TEMP.	-40 ~ +90°C (Refer to "Derating Curve")									
	WORKING HUMIDITY	20% ~ 90% RH non-condensing									
	STORAGE TEMP., HUMIDITY	-40 ~ +105°C, 10 ~ 95% RH									
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 50°C)									
	VIBRATION	10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes									
SAFETY & EMC	WITHSTAND VOLTAGE	I/P-O/P:3KVDC									
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH									
	ISOLATION CAPACITANCE	80pF max.									
	EMC EMISSION	Compliance to EN55022 Class B, FCC part 15 Class B									
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8, light industry level, criteria A									
OTHERS	MTBF	700khrs min. MIL-HDBK-217F(25°C)									
	DIMENSION	19.6*7.5*10.2mm or 0.77**0.30**0.40" inch (L*W*H)									
	WEIGHT	2.9g									


### ■ Mechanical Specification

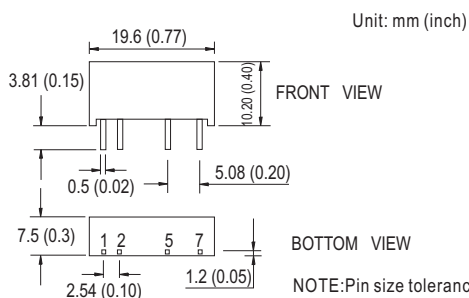

### ■ Pin Configuration

Pin No.	Output
1	+Vin
2	-Vin
5	-Vout
7	+Vout

### ■ Derating Curve

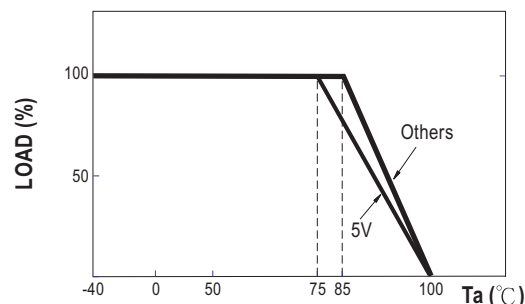

- NOTE**
- All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
  - Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
  - Line regulation is measured from low line to high line at rated load.
  - Load regulation is measured from 20% to 100% rated load.



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Input: 4,5-5,5 DC, Output: 1, V1: 5, A1: 0,6	SPU03L05	SPU03L-05	<a href="#">Buy on EAN</a>
Input: 4,5-5,5 DC, Output: 1, V1: 12, A1: 0,25	SPU03L12	SPU03L-12	<a href="#">Buy on EAN</a>
Input: 4,5-5,5 DC, Output: 1, V1: 15, A1: 0,2	SPU03L15	SPU03L-15	<a href="#">Buy on EAN</a>
Input: 10,8-13,2 DC, Output: 1, V1: 5, A1: 0,6	SPU03M05	SPU03M-05	<a href="#">Buy on EAN</a>
Input: 10,8-13,2 DC, Output: 1, V1: 12, A1: 0,25	SPU03M12	SPU03M-12	<a href="#">Buy on EAN</a>
Input: 21,6-26,4 DC, Output: 1, V1: 15, A1: 0,2	SPU03M15	SPU03M-15	<a href="#">Buy on EAN</a>
Input: 21,6-26,4 DC, Output: 1, V1: 5, A1: 0,6	SPU03N05	SPU03N-05	<a href="#">Buy on EAN</a>
Input: 21,6-26,4 DC, Output: 1, V1: 12, A1: 0,25	SPU03N12	SPU03N-12	<a href="#">Buy on EAN</a>
Input: - , Output: 1, V1: 15, A1: 0,2	SPU03N15	SPU03N-15	<a href="#">Buy on EAN</a>