





**Automatización Eléctrica**

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

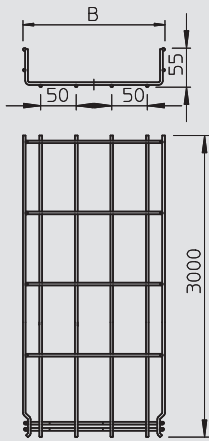

Mesh cable tray GR-Magic®



Type	Width mm	Wire Ø mm	Length mm	Useful cross- section cm²	Appr. load:			Weight kg/100 m	Item No.
					1.0 m kN/m	1.5 m kN/m	2.0 m kN/m		
GRM 55 100 F	100	3.9	3,000	40	0.35	0.2	0.1	72.000	6001 04 0
GRM 55 150 F	150	3.9	3,000	63	0.35	0.2	0.1	85.700	6001 04 4
GRM 55 200 F	200	3.9	3,000	87	0.35	0.2	0.1	99.600	6001 04 7
GRM 55 300 F	300	4.8	3,000	129	0.7	0.5	0.25	191.100	6001 05 0
GRM 55 400 F	400	4.8	3,000	175	0.9	0.6	0.3	234.600	6001 05 3
GRM 55 500 F	500	4.8	3,000	220	0.9	0.6	0.3	276.400	6001 05 6
GRM 55 600 F	600	4.8	3,000	265	0.9	0.6	0.3	318.400	6001 05 9
GRM 55 50 G	50	3.9	3,000	16	0.35	0.2	0.1	67.000	6001 44 1
GRM 55 100 G	100	3.9	3,000	40	0.35	0.2	0.1	72.400	6001 44 2
GRM 55 150 G	150	3.9	3,000	63	0.35	0.2	0.1	85.700	6001 44 4
GRM 55 200 G	200	3.9	3,000	87	0.35	0.2	0.1	100.000	6001 44 6
GRM 55 200 4.8 G	200	4.8	3,000	87	0.7	0.5	0.25	151.000	6001 44 7
GRM 55 300 G	300	4.8	3,000	129	0.7	0.5	0.25	194.900	6001 44 8
GRM 55 400 G	400	4.8	3,000	175	0.9	0.6	0.3	236.700	6001 45 0
GRM 55 450 G	450	4.8	3,000	195	0.9	0.6	0.3	238.000	6001 45 1
GRM 55 500 G	500	4.8	3,000	220	0.9	0.6	0.3	279.000	6001 45 2
GRM 55 600 G	600	4.8	3,000	265	0.9	0.6	0.3	321.200	6001 45 4
GRM 55 50 FT	50	3.9	3,000	16	0.35	0.2	0.1	70.000	6001 41 5
GRM 55 100 FT	100	3.9	3,000	40	0.35	0.2	0.1	71.330	6001 41 6
GRM 55 150 FT	150	3.9	3,000	63	0.35	0.2	0.1	90.000	6001 41 8
GRM 55 200 FT	200	3.9	3,000	87	0.35	0.2	0.1	103.500	6001 42 0
GRM 55 200 4.8 FT	200	4.8	3,000	87	0.7	0.5	0.25	154.300	6001 42 1
GRM 55 300 FT	300	4.8	3,000	129	0.7	0.5	0.25	198.800	6001 42 4
GRM 55 400 FT	400	4.8	3,000	175	0.9	0.6	0.3	244.300	6001 42 8
GRM 55 450 FT	450	4.8	3,000	195	0.9	0.6	0.3	244.000	6001 43 0
GRM 55 500 FT	500	4.8	3,000	220	0.9	0.6	0.3	287.700	6001 43 2
GRM 55 600 FT	600	4.8	3,000	265	0.9	0.6	0.3	331.600	6001 43 6

St Steel F Hot-dip galvanised G Electrogalvanised FT Hot-dip galvanised /m


Mesh cable tray with shaped connector of side height 55 mm.

Magnetic shield insulation without cover 15 dB, with cover 25 dB.

No additional connection components are required for the mesh cable tray, it is simply inter-locked. The grid width is 50 x 100 mm (exception: GRM 55/50 = 20 x 100 mm).

Description, surface F = pre-galvanised wires according to DIN EN 10244/2 (surface approx. 10 µm).

Load diagram, GR-Magic mesh cable tray, type GRM 55

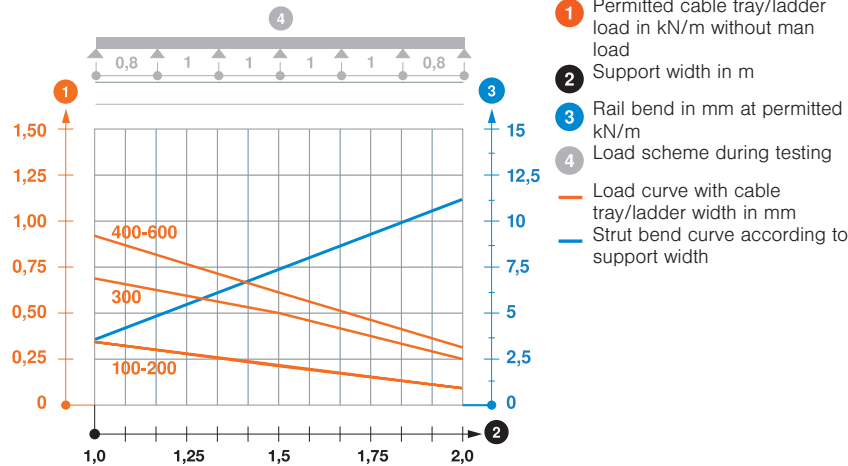



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Mesh cable tray GRM , 55x50x3000, Hot-dip galvanised, DIN EN ISO 1461, Steel, St	6001415	GRM 55 50 FT	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x100x3000, Hot-dip galvanised, DIN EN ISO 1461, Steel, St	6001416	GRM 55 100 FT	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x150x3000, Hot-dip galvanised, DIN EN ISO 1461, Steel, St	6001418	GRM 55 150 FT	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x200x3000, Hot-dip galvanised, DIN EN ISO 1461, Steel, St	6001420	GRM 55 200 FT	<a href="#">Buy on EAN</a>
Mesh cable tray GRM wire thickness: 4.8 mm, 55x200x3000, Hot-dip galvanised, DIN EN ISO 1461, Steel, St	6001421	GRM 55 200 4.8FT	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x300x3000, Hot-dip galvanised, DIN EN ISO 1461, Steel, St	6001424	GRM 55 300 FT	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x400x3000, Hot-dip galvanised, DIN EN ISO 1461, Steel, St	6001428	GRM 55 400 FT	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x450x3000, Hot-dip galvanised, DIN EN ISO 1461, Steel, St	6001430	GRM 55 450 FT	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x500x3000, Hot-dip galvanised, DIN EN ISO 1461, Steel, St	6001432	GRM 55 500 FT	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x600x3000, Hot-dip galvanised, DIN EN ISO 1461, Steel, St	6001436	GRM 55 600 FT	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x50x3000, Electrogalvanised, DIN 50961, Steel, St	6001441	GRM 55 50 G	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x100x3000, Electrogalvanised, DIN 50961, Steel, St	6001442	GRM 55 100 G	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x150x3000, Electrogalvanised, DIN 50961, Steel, St	6001444	GRM 55 150 G	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x200x3000, Electrogalvanised, DIN 50961, Steel, St	6001446	GRM 55 200 G	<a href="#">Buy on EAN</a>

Mesh cable tray GRM wire thickness: 4.8 mm, 55x200x3000, Electrogalvanised, DIN 50961, Steel, St	6001447	GRM 55 200 4.8 G	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x300x3000, Electrogalvanised, DIN 50961, Steel, St	6001448	GRM 55 300 G	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x400x3000, Electrogalvanised, DIN 50961, Steel, St	6001450	GRM 55 400 G	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x450x3000, Electrogalvanised, DIN 50961, Steel, St	6001451	GRM 55 450 G	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x500x3000, Electrogalvanised, DIN 50961, Steel, St	6001452	GRM 55 500 G	<a href="#">Buy on EAN</a>
Mesh cable tray GRM , 55x600x3000, Electrogalvanised, DIN 50961, Steel, St	6001454	GRM 55 600 G	<a href="#">Buy on EAN</a>