




**Automatización Eléctrica**

Especialistas en Automatización


At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)



Profile suspensions

Type	Dimen- sion H mm	Dimen- sion L mm	Breaking load kN	Flange thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
TKL 4	52	10	0.72	1.5-4	100	0.860	1485 10 5
TKL 6	54	12	0.72	4-6	100	1.090	1485 11 3


**St** Steel      **ZD** Galvanised, Deltatone 500      /100 pc.  
Profile suspension with drill hole to accept S hooks.



Support clip

Type	Flange thickness mm	Clamping range D mm	Pack. pcs	Weight kg/100 pcs.	Item No.
TC 7-10 ZD	5-7	3-10	100	0.750	1487 70 1
TC 9-20 ZD	8-9	7-20	100	0.880	1487 72 8

**St** Steel      **ZD** Galvanised, Deltatone 500      /100 pc.  
With internal pipe clip.

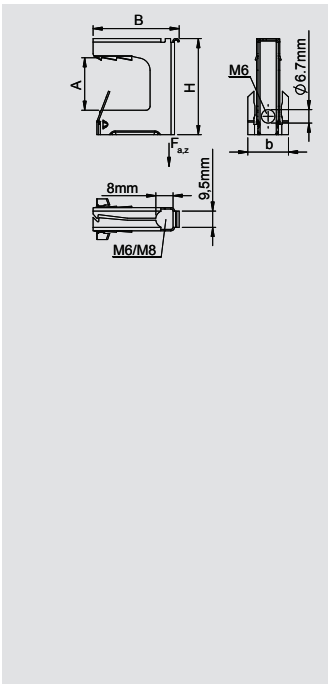

Beam clamp, multifunctional

Type	Breaking load kN	Dimen- sion B mm	Dimen- sion H mm	Flange thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
TK MULTI 8	1.2	30	30	2-8	100	—	1485 14 0
TK MULTI 16	1.2	32	38	8-16	100	—	1485 14 4
TK MULTI 24	1.2	42	48	16-24	50	—	1485 14 8

**St** Steel      **ZDM** Galvanised, MAGNI 565      /100 pc.

Different fastening options are possible,  
meaning one clip for any application.

- Multifunctional sprung steel clamp for steel girders
- Unifies the application of multiple products, e.g. S-hooks, wire cable, threaded rod (M6 or M8), cable tie
- For static loads, usable once, immovable
- No welding, no drilling, knocking in or attachment by hand
- Efficient and quick
- For fastening of cables, protection pipes, cable sections, etc.
- High load capacity (tested by CSTB - FR)
- Also suitable for outdoor use
- Material: hardened steel, Magni-coated surface (600-hour corrosion resistance)
- Incl. ICP threaded plate for wood screws of 4.0 to 4.5 mm

Properties:

- Opening for cable tie/strap of up to 9 mm width, M6-M8 threaded rod, wire cable etc.
- 6.7 mm hole diameter for M6 threaded rod, S-hook, acoustic ceiling hook etc.
- ICP clip for fastening with wood screws, diameter 4.0 - 4.5 mm





Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Beam clamp , 1,5-4mm, Galvanised, Deltatone 500, Steel, St	1485105	TKL 4	<a href="#">Buy on EAN</a>
Beam clamp , 4-6mm, Galvanised, Deltatone 500, Steel, St	1485113	TKL 6	<a href="#">Buy on EAN</a>
Beam clamp multifunctional, 2-8mm, Galvanised, MAGNI 565, Steel, St	1485140	TK MULTI 8	<a href="#">Buy on EAN</a>
Beam clamp multifunctional, 8-16mm, Galvanised, MAGNI 565, Steel, St	1485144	TK MULTI 16	<a href="#">Buy on EAN</a>
Beam clamp multifunctional, 16-24mm, Galvanised, MAGNI 565, Steel, St	1485148	TK MULTI 24	<a href="#">Buy on EAN</a>
Carrier clip for 7-20 mm pipes, 8-9mm, Galvanised, Deltatone 500, Steel, St	1487728	TC 9-20 ZD	<a href="#">Buy on EAN</a>