



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)


Printed-circuit board connector - FMC 0,5/16-ST-2,54 - 1821232

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Plug component, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 16, Pitch: 2.54 mm, Connection method: Push-in spring connection, Color: black, Contact surface: Gold



The figure shows a 10-position version of the product

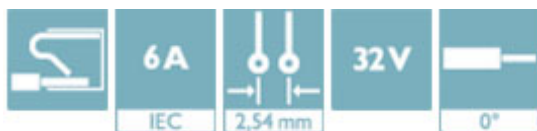

Key Commercial Data

Packing unit	100 STK
GTIN	 4 046356 789394

Technical data

Dimensions

Length	15.4 mm
Height	5.4 mm
Width	41.1 mm
Pitch	2.54 mm
Dimension a	38.1 mm

General

Range of articles	FMC 0,5/...-ST
Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	32 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	160 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	6 A
Nominal cross section	0.5 mm ²

Printed-circuit board connector - FMC 0,5/16-ST-2,54 - 1821232

Technical data

General

Insulating material	LCP
Flammability rating according to UL 94	V0
Stripping length	7 mm
Number of positions	16

Connection data

Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	0.5 mm ²
Conductor cross section flexible min.	0.14 mm ²
Conductor cross section flexible max.	0.5 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve min.	0.25 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve max.	0.34 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve min.	0.14 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve max.	0.25 mm ²
Conductor cross section AWG min.	26
Conductor cross section AWG max.	20

Standards and Regulations

Connection in acc. with standard	EN-VDE
Flammability rating according to UL 94	V0

Classifications

eCl@ss

eCl@ss 4.0	27141109
eCl@ss 4.1	27141109
eCl@ss 5.0	27141190
eCl@ss 5.1	27141190
eCl@ss 6.0	27261101
eCl@ss 7.0	27440402
eCl@ss 8.0	27440309

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002643
ETIM 5.0	EC002638

UNSPSC

UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432
UNSPSC 11	39121432
UNSPSC 12.01	39121432

Printed-circuit board connector - FMC 0,5/16-ST-2,54 - 1821232

Classifications

UNSPSC

UNSPSC 13.2	39121432
-------------	----------

Approvals

Approvals

Approvals

EAC / cULus Recognized / VDE Gutachten mit Fertigungsüberwachung / IEC60364 CB Scheme


Ex Approvals


Approvals submitted

Approval details

EAC

cULus Recognized		
	B	C
mm ² /AWG/kcmil	26-20	26-20
Nominal current I _N	6 A	6 A
Nominal voltage U _N	150 V	50 V


VDE Gutachten mit Fertigungsüberwachung 	
mm ² /AWG/kcmil	0.14-0.5
Nominal current I _N	6 A
Nominal voltage U _N	160 V

IECEE CB Scheme 	
mm ² /AWG/kcmil	0.14-0.5
Nominal current I _N	6 A
Nominal voltage U _N	160 V


Printed-circuit board connector - FMC 0,5/16-ST-2,54 - 1821232

Drawings

Dimensional drawing

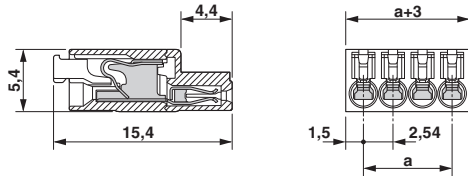


Diagram

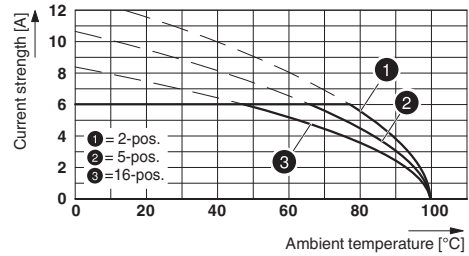


Type: FMC 0,5/...-ST-2,54 with MC 0,5/...-G-2,54 P20 THR R..

Diagram

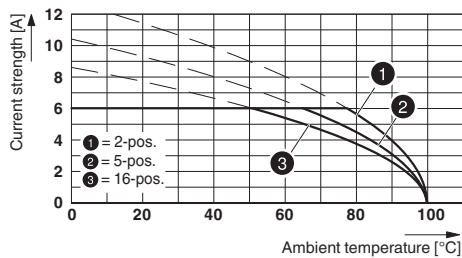


Type: FMC 0,5/...-ST-2,54 with MCV 0,5/...-G-2,54 P20 THR R..

Diagram

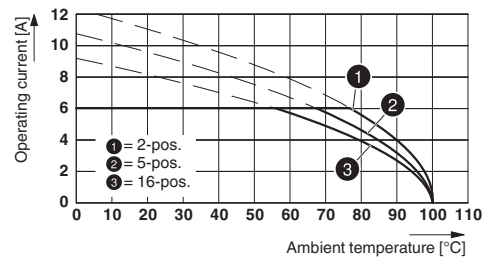

Type: FMC 0,5/...-ST-2,54 with MCV 0,5/...-G-2,54 SMD R..

Diagram

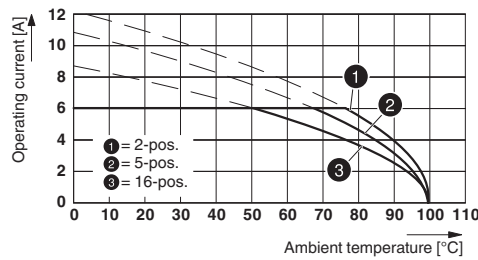

Type: FMC 0,5/...-ST-2,54 with MC 0,5/...-G-2,54 SMD R..



Automatización Eléctrica
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Plug component, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 16, Pitch: 2.54 mm, Connection method: Push-in spring connection, Color: black, Contact surface: Gold	1821232	FMC 0,5/16-ST-2,54	Buy on EAN