



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Uninterruptible power supply - QUINT-UPS/ 24DC/ 24DC/ 5/1.3AH - 2320254

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Uninterruptible power supply with IQ technology and integrated power storage for DIN rail mounting, input 24 V DC, output: 24 V DC/5 A, power storage: lead AGM 1.3 Ah, incl. mounted UTA 107/30 universal DIN rail adapter

Why buy this product

- Easy handling thanks to automatic battery detection, tool-free battery replacement during operation, and communication via the IFS interface
- Reliable starting of difficult loads with the static POWER BOOST power reserve with up to 1.5 times the nominal current permanently
- Fast tripping of standard circuit breakers with SFB (selective fuse breaking) technology
- Device suitable for universal use thanks to comprehensive license package and extensive parameterization and diagnostics options



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 554145

Technical data

Dimensions

Width	88 mm
Height	138 mm
Depth	125 mm

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 40 °C
Ambient temperature (storage/transport)	-15 °C ... 40 °C
Max. permissible relative humidity (operation)	≤ 95 % (25°C, non-condensing)
Noise immunity	EN 61000-6-2:2005

Input data

Nominal input voltage	24 V DC
Input voltage range	18 V DC ... 30 V DC

Uninterruptible power supply - QUINT-UPS/ 24DC/ 24DC/ 5/1.3AH - 2320254

Technical data

Input data

Current consumption (maximum)	9.3 A (24 V DC)
Current consumption (idle)	9.7 mA
Current consumption (charging process)	1.7 A
Buffer period	50 min. (1 A)
	5 min. (5 A)

Output data (24 V DC mains operation)

Nominal output voltage	24 V DC
Output voltage range (depends on the input voltage)	18 V DC ... 30 V DC ($U_{OUT} = U_{IN} - 0.1 \text{ V DC}$)
Nominal output current	5 A (0°C ... 40°C)
POWER BOOST (I_{Boost})	7.5 A (-25°C ... 40°C)
Selective Fuse Breaking (I_{SFB})	30 A (-25 °C ... 60 °C)

Output data (24 V DC battery operation)

Nominal output voltage	24 V DC
Output voltage range (depends on the input voltage)	19.2 V DC ... 27.6 V DC ($U_{OUT} = U_{BAT} - 0.5 \text{ V DC}$)
Nominal output current	5 A (-25 °C ... 60 °C)
POWER BOOST (I_{Boost})	7.5 A (-25°C ... 40°C)
Selective Fuse Breaking (I_{SFB})	32.5 A (-25 °C ... 60 °C)

General output data

Efficiency	> 97.1 % (Mains operation, with charged power storage)
------------	--

General

IQ technology	Yes
Disposal	Used batteries must not be thrown away with household waste, they should instead be disposed of in accordance with applicable national regulations. They can also be returned to Phoenix Contact or the manufacturer.
Net weight	2.2 kg
Memory medium	Lead rechargeable battery module 1.3 Ah
Protection class	III
MTTF/ MTBF (IEC 61709, SN 29500)	> 806000 h (40°C)
Mounting position	horizontal DIN rail NS 35, EN 60715
Assembly instructions	Can be aligned: horizontal 5 mm, vertical 50 mm

Connection data, input

Connection method	Pluggable screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	20

Uninterruptible power supply - QUINT-UPS/ 24DC/ 24DC/ 5/1.3AH - 2320254

Technical data

Connection data, input

Conductor cross section AWG max.	12
Stripping length	7 mm
Screw thread	M4

Connection data, output

Connection method	Pluggable screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	20
Conductor cross section AWG max.	12
Stripping length	7 mm
Screw thread	M4

Connection data for signaling

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12
Screw thread	M4

Standards and Regulations

Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
Shock	30g in each direction, according to IEC 60068-2-27
Noise immunity	EN 61000-6-2:2005
Connection in acc. with standard	CUL
Standards/regulations	EN 61000-4-3
	EN 61000-4-4
	EN 61000-4-6
Standard - Electrical safety	EN 60950-1/VDE 0805 (SELV)
	EN 61558-2-17
Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations	EN 50178/VDE 0160 (PELV)
UL approvals	UL/C-UL Recognized UL 60950
	UL Listed UL 508
Vibration (operation)	< 15 Hz, amplitude ±2.5 mm (according to IEC 60068-2-6)
Low Voltage Directive	Conformance with LV directive 2006/95/EC
Rail applications	EN 50121-4

Uninterruptible power supply - QUINT-UPS/ 24DC/ 24DC/ 5/1.3AH - 2320254

Classifications

eCl@ss

eCl@ss 4.0	27040702
eCl@ss 4.1	27040702
eCl@ss 5.0	27242213
eCl@ss 5.1	27040603
eCl@ss 6.0	27040603
eCl@ss 7.0	27040603
eCl@ss 8.0	27049201

ETIM

ETIM 3.0	EC001039
ETIM 4.0	EC000382
ETIM 5.0	EC000382

UNSPSC

UNSPSC 6.01	30211510
UNSPSC 7.0901	39121011
UNSPSC 11	39121011
UNSPSC 12.01	39121011
UNSPSC 13.2	39121011

Approvals

Approvals

Approvals

UL Recognized / UL Listed / cUL Recognized / cUL Listed / EAC / EAC / cULus Recognized / cULus Listed

Ex Approvals

UL Listed / cUL Listed

Approvals submitted

Approval details



Uninterruptible power supply - QUINT-UPS/ 24DC/ 24DC/ 5/1.3AH - 2320254

Approvals

UL Listed

cUL Recognized

cUL Listed

EAC


EAC

cULus Recognized

cULus Listed

Drawings

Block diagram

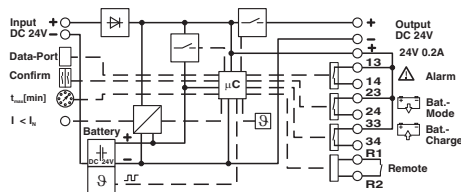

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Uninterruptible power supply with IQ technology and integrated power storage for DIN rail mounting, input 24 V DC, output: 24 V DC/5 A, power storage: lead AGM 1.3 Ah, incl. mounted UTA 107/30 universal DIN rail adapter	2320254	QUINT-UPS/ 24DC/ 24DC/ 5/1.3AH	Buy on EAN