



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

Surge protection device - D-LAN-19"-20 - 2880134

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

19" rack with 20 surge protected ports for data interfaces in Ethernet (1000Base-T), Token Ring and FDDI/CDDI networks in acc. with Class D/EN 50173 (CAT5e), connection on the protective device: RJ45 sockets



The illustration shows the version with 24 ports

Why buy this product

- 19" rack for installation in storey distributors
- Protection of all eight signal wires of the data cable
- Reliable transmission speeds up to 1 Gbps
- Up to 24 ports with RJ45 connection
- Indirect grounding via a gas-filled surge arrester in the housing
- Direct grounding via a connection on the housing

Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 962784

Technical data

Dimensions

Height	44 mm
Width	483 mm
Depth	160 mm
Height unit	1 U

Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
Degree of protection	IP20

General

Housing material	Sheet steel
Color	beige
Standards for clearances and creepage distances	DIN VDE 0110-1
	IEC 60664-1
Overvoltage category	II

Surge protection device - D-LAN-19"-20 - 2880134

Technical data

General

Degree of pollution	2
Mounting type	19" rack
Type	19" rack patch module
Number of positions	20
Direction of action	Line-Line & Line-Signal Ground/Shield & Signal Ground/Shield-Earth Ground

Protective circuit

IEC test classification	C1
	C2
	C3
	B3
Maximum continuous voltage U_C (wire-wire)	6 V DC
Maximum continuous voltage U_C (wire-ground)	68 V DC (optional: +/- 6 V DC)
Nominal current I_N	1.5 A (25 °C)
Operating effective current I_C at U_C	≤ 1 mA
Residual current I_{PE}	≤ 1 mA (jumper 2 unplugged)
Nominal discharge current I_n (8/20) μ s (Core-Core)	350 A
Nominal discharge current I_n (8/20) μ s (Core-Earth)	350 A
Nominal discharge current I_n (8/20) μ s (Shield-Earth)	2.5 kA (with insulated housing)
Total surge current (8/20) μ s	10 kA
Nominal pulse current I_{an} (10/1000) μ s (Core-Core)	100 A
Nominal pulse current I_{an} (10/1000) μ s (Core-Earth)	100 A
Output voltage limitation at 1 kV/ μ s (Core-Core) static	≤ 20 V
Output voltage limitation at 1 kV/ μ s (Core-Earth) static	≤ 30 V (J2 plugged)
	≤ 170 V (J2 unplugged)
Output voltage limitation at 1 kV/ μ s (Shield-Earth) static	≤ 700 V (with insulated shield)
Residual voltage at I_n (conductor-conductor)	≤ 65 V
Residual voltage at I_n (conductor-ground)	≤ 45 V (J2 ON)
	≤ 220 V (J2 OFF)
Residual voltage at I_n (shield-ground)	≤ 700 V
Voltage protection level U_p (core-core)	≤ 50 V (C1, 500 V/250 A)
Voltage protection level U_p (core-ground)	≤ 40 V (C1, 500 V/250 A (J2 ON))
	≤ 180 V (C1, 500 V/250 A (J2 OFF))
Voltage protection level U_p (shield-ground)	≤ 800 V (with insulated housing)
Response time t_A (Core-Core)	≤ 1 ns
Response time t_A (Core-Earth)	≤ 1 ns
Response time t_A (Core-GND)	≤ 100 ns
Input attenuation aE, sym.	typ. 1 dB (≤ 100 MHz)
Near-end crosstalk attenuation	typ. 36 dB (100 Ω system / 100 MHz)
Cut-off frequency f_g (3 dB), sym. in 100 Ohm system	> 100 MHz

Surge protection device - D-LAN-19"-20 - 2880134

Technical data

Protective circuit

Capacity (Core-Core)	typ. 20 pF
Capacity (Core-Earth)	typ. 1 pF
Impulse durability (conductor-conductor)	C1 - 500 V / 250 A
Impulse durability (conductor-ground)	C1 (500 A/250 A)
Impulse durability (shield-ground)	C2 (4 kV / 2 kA)

Connection data

Connection method	RJ45
Connection type IN	RJ45 socket
Connection type OUT	RJ45 socket
Connection method	Network interfaces (e.g. Ethernet, Token Ring and CDDI/FDDI)

Standards and Regulations

Standards/regulations	IEC 61643-21
	DIN EN 50173-1

Classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807
eCl@ss 9.0	27130807

ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Surge protection device - D-LAN-19"-20 - 2880134

Approvals

Approvals

Approvals

EAC

Ex Approvals


Approvals submitted

Approval details


EAC

Drawings

Dimensional drawing

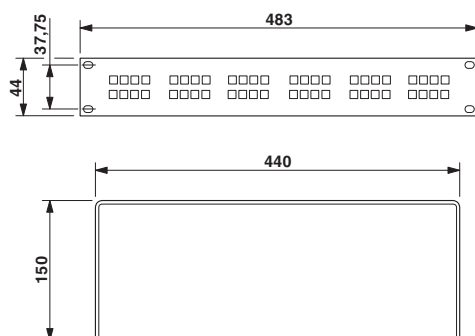

Circuit diagram

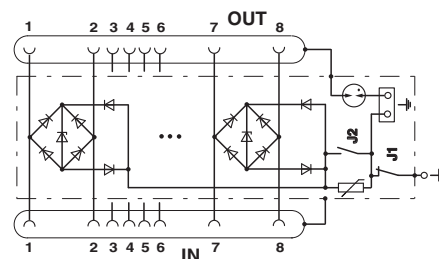

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
19" rack with 20 surge protected ports for data interfaces in Ethernet (1000Base-T), Token Ring and FDDI/CDDI networks in acc. with Class D/EN 50173 (CAT5e), connection on the protective device: RJ45 sockets	2880134	D-LAN-19"-20	Buy on EAN