



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

## Industrial Ethernet Switch - FL SWITCH 1924 - 2891057

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Ethernet switch, 24 Ethernet ports on the front in RJ45 format, automatic detection of 10, 100 or 1000 Mbps data transmission rate, coupling of network segments with different transmission speeds, auto crossing function, installs in 19-in. (482 mm) rack



### Product Description

#### Ethernet interface

The FL SWITCH 1924 has 24 Ethernet ports in RJ45 format. It is mounted in a 19-in. (482 mm) rack with AC power. The data transmission speed is 10 Mbps, 100 Mbps or 1000 Mbps. The switch also supports jumbo frames.

Each port has an auto crossing function. It is not necessary to make a distinction between 1:1 or crossover Ethernet cables. Mounting brackets and power cords for EEC (CEE 7/4) and North America (NEMA 5-15) are included. User supplies screws for bracket to rack connection.

#### Switching properties of FL SWITCH 1924

##### –Store-and-forward:

All data telegrams that are received by the switch have their validity checked. Invalid or faulty data packets (>9216 bytes or CRC errors) and fragments (<64 bytes) are rejected. Valid data telegrams are forwarded by the switch. The switch always forwards the data using the data transmission speed that is used in the destination network segment.

##### –Multi-address function:

The switch independently learns the addresses for termination devices, which are connected via a port, by evaluating the source addresses in the data telegrams. Only packets with unknown addresses, with a source address of this port or with a multicast/broadcast address in the destination address field are forwarded via the corresponding port. The switch can store up to 8192 MAC addresses in its address table.

##### –Quality of service (QoS): IEEE 802.1P/Q

The FL SWITCH 1924 switches are capable of reading Ethernet packets that have already been assigned a priority level by a managed switch. In case of heavy traffic, packets with a priority level between 4 and 7 are considered high priority and processed before packets with a priority level between 0 and 3 (2:1 ratio). After prioritization the packets are forwarded without modification.

##### –Grounding


The metal RJ45 socket housings are connected to earth/ground. For maximum noise immunity, shielded RJ45 connectors and cables should be used.

### Why buy this product

- Jumbo frame support (frame size up to 9216 bytes/frame)
- Quality of service (QoS) support (2 queues)
- Power supply range of 100 ... 240 V AC at 50/60 Hz
- MAC address table size is 8192 (8k) entries
- Two power cords are included. For North America, a NEMA 5-15 3-pin plug (type A). For EEC, a CEE 7/4 (type F)

## Ethernet

### Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 763158

# Industrial Ethernet Switch - FL SWITCH 1924 - 2891057

## Technical data

### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---------------------------------------------------------------------------

### Dimensions

Width	482 mm
Height	44 mm
Depth	210 mm

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Air pressure (operation)	86 kPa ... 108 kPa (1500 m above sea level)

### Interfaces

Interface 1	Ethernet
No. of ports	24 (RJ45 ports)
Connection method	RJ45
Transmission physics	Twisted pair connection
Transmission speed	10/100/1000 MBit/s (full or half duplex)
Transmission length	100 m (per segment)
Signal LEDs	Activity, link status

### Function

Basic functions	Unmanaged switch / auto negotiation, complies with IEEE 802.3, store and forward switching mode
MAC address table	8192
Status and diagnostic indicators	LEDs: U <sub>S</sub> , link and activity per port

### Network expansion parameters

Cascading depth	Network, linear, and star structure: any
Maximum conductor length (twisted pair)	100 m

### Supply voltage

Supply voltage	120 V AC
	220 V AC
Supply voltage range	100 V AC ... 240 V AC (50/60 Hz)
Typical current consumption	312 mA (100 V AC)
Max. current consumption	0.4 A (maximum)
Inrush surge current	23 A (200 µs @ 230 V AC)

### General

Mounting type	Rack mount, includes brackets
Type AX	Stand-alone

# Industrial Ethernet Switch - FL SWITCH 1924 - 2891057

## Technical data

### General

Net weight	2730 g
------------	--------

### Standards and Regulations

Electromagnetic compatibility	Conformance with EMC directive 2004/108/EC and for low-voltage directive 2006/95/EC
Developed in acc. with standard	IEC 61000-6.2
Test standard	EN 61000-4-2 (ESD)
Test result	Criterion B
Test standard	EN 61000-4-3 (radiated noise immunity)
Test result	Criterion A
Test standard	EN 61000-4-4 (EFT burst)
Test result	Criterion B
Test standard	EN 61000-4-5 (surge)
Test result	Criterion B
Test standard	EN 61000-4-6 (line noise immunity)
Test result	Criterion A
Test standard	EN 61000-4-8 (electromagnetic fields)
Test result	Criterion A
Test standard	EN 61000-4-11
Type of test	Shock in acc. with EN 60068-2-27/IEC 60068-2-27
Test result	30g, 11 ms half-sine shock pulse
Type of test	Vibration resistance in acc. with EN 60068-2-6/IEC 60068-2-6
Test result	5g, 10-150 Hz
Noise emission	EN 61000-6-4
Noise immunity	EN 61000-6-2:2005

## Classifications

### eCl@ss

eCl@ss 4.0	24010504
eCl@ss 4.1	24010504
eCl@ss 5.0	19030117
eCl@ss 5.1	19030117
eCl@ss 6.0	19170106
eCl@ss 7.0	19170106
eCl@ss 8.0	19170106

### ETIM

ETIM 3.0	EC000734
ETIM 4.0	EC000734
ETIM 5.0	EC000734

# Industrial Ethernet Switch - FL SWITCH 1924 - 2891057

## Classifications

### UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201410
UNSPSC 13.2	43201410

## Approvals

### Approvals

#### Approvals

UL Listed / cUL Listed / EAC

#### Ex Approvals

#### Approvals submitted

### Approval details

UL Listed


cUL Listed

EAC

## Drawings

## Industrial Ethernet Switch - FL SWITCH 1924 - 2891057


Application drawing

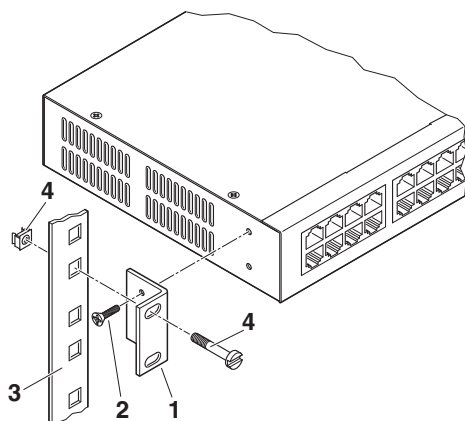

Attach the brackets to each side of the switch with the included screws (as shown).


Install the switch in the rack using the rack hardware.

Schematic diagram

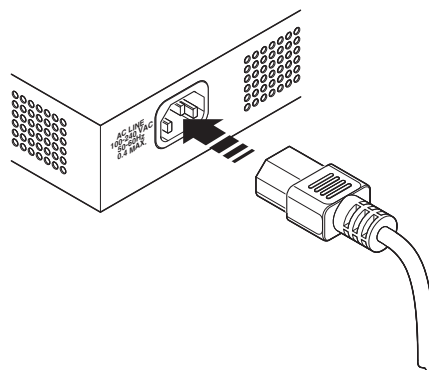

Two power cords are included and provide line, neutral and ground conductors:  
For North American markets the power cord uses a NEMA 5-15 plug.  
For European markets the power cord uses a CEE 7/4 plug.  
Both power cords use a common plug (IEC 60320-1 type C13) for connecting to the FL SWITCH 1924.


Schematic diagram



RJ45 pinout for 1000 Mbps

## Industrial Ethernet Switch - FL SWITCH 1924 - 2891057

Diagnostics drawing

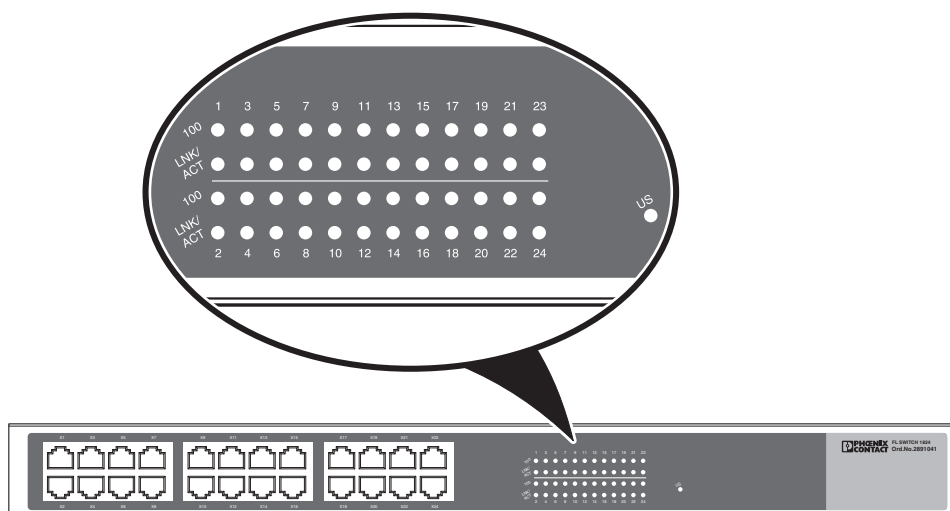

The US LED indicates power is present.

Each port has 2 LEDs:

- When the 100 LED is illuminated, the port is operating at 100 Mbps. When off, it is operating at 10 Mbps.
- The LNK/ACT LED is illuminated when the port is connected and off when not connected. Flashing indicates data transfer (RX or TX).

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

**PHOENIX CONTACT GmbH & Co. KG**  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Ethernet switch, 24 Ethernet ports on the front in RJ45 format, automatic detection of 10, 100 or 1000 Mbps data transmission rate, coupling of network segments with different transmission speeds, auto crossing function, installs in 19-in. (482 mm) rack	2891057	FL SWITCH 1924	<a href="#">Buy on EAN</a>