



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

## Inline terminal - IB IL TEMP 4/8 RTD/EF-PAC - 2897402

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Inline Modular analog input terminal; 8 inputs, RTD (resistance temperature detector), 4-wire connection method, complete with individually numbered I/O connectors

### Why buy this product

- Pt, Ni, Cu, KTY sensor types according to DIN and SAMA
- Measured value acquisition with 16-bit resolution
- Channel scout for optical channel identification
- Connection of sensors in 2, 3, and 4-wire technology
- Temperature stability
- Connection of 8 RTD temperature sensors and linear resistors in 4-wire technology
- Resistance values can be preset separately using configuration bits
- Additional representation in float format according to IEEE754
- Diagnostic and status indicators

### Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 288026

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Dimensions

Width	48.8 mm
Height	119.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)

# Inline terminal - IB IL TEMP 4/8 RTD/EF-PAC - 2897402

## Technical data

### Ambient conditions

Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20

### General

Net weight	221.6 g
Mounting type	DIN rail
Operating mode	Process data mode with 5 words/1 word PCP

### Interfaces

Designation	Inline local bus
Connection method	Inline data jumper
Transmission speed	500 kBit/s
Transmission physics	Copper

### Inline potentials

Communications power $U_L$	7.5 V DC (via voltage jumper)
Current consumption from $U_L$	typ. 95 mA
I/O supply voltage $U_{ANA}$	24 V DC
Current consumption from $U_{ANA}$	typ. 6 mA
Power consumption	typ. 0.85 W

### Analog inputs

Number of inputs	8
Input name	Analog RTD inputs
Description of the input	Input for resistive temperature sensors
Connection method	Spring-cage connection
	4-wire
Sensor types (RTD) that can be used	Pt, Ni, KTY sensors, linear resistors
Linear resistance measuring range	0 $\Omega$ ... 500 $\Omega$
	0 $\Omega$ ... 5 k $\Omega$
	0 $\Omega$ ... 30 k $\Omega$
Measuring principle	Sigma/Delta process
Measured value representation	16 bits (15 bits + sign bit)
Resolution A/D	24 bit
Process data update	1.8 s (Up to 3.3 s possible depending on operating mode)
Data formats	IB IL, S7-compatible

### Standards and Regulations

Test section	7.5 V supply (bus logics)/24 V analog supply (analog I/O) 500 V AC 50 Hz 1 min.
	7.5 V supply (bus logics) / functional earth ground 500 V AC 50 Hz 1 min.

# Inline terminal - IB IL TEMP 4/8 RTD/EF-PAC - 2897402

## Technical data

### Standards and Regulations

	7.5 V supply (bus logics)/24 V supply (I/O) 500 V AC 50 Hz 1 min.
	5 V supply, outgoing remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min.
	I/O / functional earth ground 500 V AC 50 Hz 1 min.
Protection class	III, IEC 61140, EN 61140, VDE 0140-1

## Classifications

### eCl@ss

eCl@ss 4.0	27250303
eCl@ss 4.1	27250303
eCl@ss 5.0	27250303
eCl@ss 5.1	27242601
eCl@ss 6.0	27242601
eCl@ss 7.0	27242601
eCl@ss 8.0	27242601

### ETIM

ETIM 2.0	EC001431
ETIM 3.0	EC001596
ETIM 4.0	EC001596
ETIM 5.0	EC001596

### UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

## Approvals

### Approvals

#### Approvals

UL Listed / cUL Listed / LR / BV / ABS / EAC / cULus Listed / GL

#### Ex Approvals

UL Listed / cUL Listed / ATEX / cULus Listed

# Inline terminal - IB IL TEMP 4/8 RTD/EF-PAC - 2897402

## Approvals

Approvals submitted

### Approval details

UL Listed

cUL Listed

LR

BV

ABS


EAC

cULus Listed


GL

## Drawings

Connection diagram



Dimensional drawing

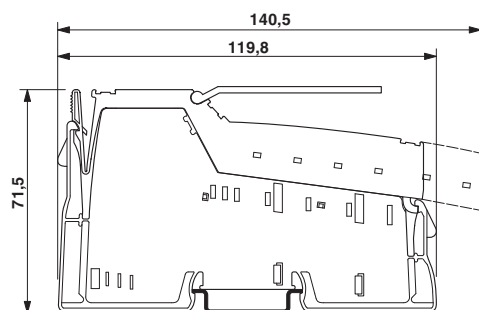

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Inline Modular analog input terminal; 8 inputs, RTD (resistance temperature detector), 4-wire connection method, complete with individually numbered I/O connectors	2897402	IB IL TEMP 4/8 RTD/EF-PAC	<a href="#">Buy on EAN</a>