



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

## Electronic housing - ME MAX 17,5 SF G 2-2 KMGY - 2901369

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Complete housing without vents, Cross connection: DIN rail bus connector, Color: light gray, Width: 17.5 mm, Constructional height: 70.4 mm, Number of positions cross connector: 5

### Why buy this product

- Item is from the ME-MAX product range
- Easy mounting
- Available in overall widths from 6.2 mm to 90 mm, modular extension is possible
- Inflammability class V0 according to UL 94
- Variety of connection technologies
- Can be mounted on the DIN rail
- Optional with bus connector for DIN rail mounting as well as power connection system



### Key Commercial Data

Packing unit	10 STK
Minimum order quantity	10 STK
GTIN	 4 046356 178525

### Technical data

#### General

Housing type	Complete housing
Housing material	Polyamide
Color	light gray

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 105 °C (depending on power dissipation)
---------------------------------	--

#### Dimensions

Length	85 mm
Constructional height	70.4 mm
Width	17.5 mm

# Electronic housing - ME MAX 17,5 SF G 2-2 KMGY - 2901369

## Technical data

### Technical data

Connection in acc. with standard	CUL
Indicator1	CUL1
Flammability rating according to UL 94	V0
Power dissipation without gap	3.2 W
Power dissipation with 20 mm gap	5.9 W
Number of positions	12

### Standards and Regulations

Connection in acc. with standard	CUL
Flammability rating according to UL 94	V0

## Classifications

### eCl@ss

eCl@ss 4.0	27180401
eCl@ss 4.1	27180401
eCl@ss 5.0	27180506
eCl@ss 5.1	27180506
eCl@ss 6.0	27180802
eCl@ss 7.0	27182702
eCl@ss 8.0	27182702
eCl@ss 9.0	27182702

### ETIM

ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 5.0	EC001031

### UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

## Approvals

### Approvals

#### Approvals

UL Recognized / cUL Recognized / UL Recognized / cULus Recognized

# Electronic housing - ME MAX 17,5 SF G 2-2 KMGY - 2901369

## Approvals

---

Ex Approvals

---

Approvals submitted

---

## Approval details

UL Recognized


cUL Recognized

UL Recognized

cULus Recognized

## Drawings

Dimensional drawing

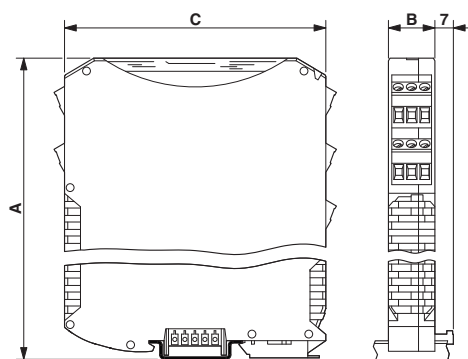

A = 70.4 mm; B = 17.5 mm; C = 85 mm

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Complete housing without vents, Cross connection: DIN rail bus connector, Color: light gray, Width: 17.5 mm, Constructional height: 70.4 mm, Number of positions cross connector: 5	2901369	ME MAX 17,5 SF G 2-2 KMGY	<a href="#">Buy on EAN</a>