


Universal busbar support

Universal busbar support

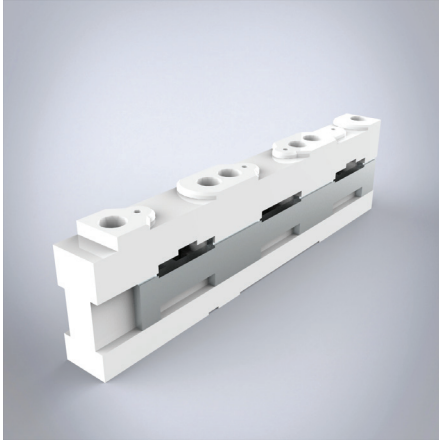

Description: Universal busbar support 3/4-Pole with internal screw holes, delivered without end cover.

Rated voltage: 690 V

Rated frequency: 50/60 Hz

Rated isolation voltage U_i : 1000 V

Rated surge voltage U_{imp} : 8 kV

Approvals: GL, DNV GL

N° of Poles	Dimensions	For busbar	Pack quantity	Item no.
4	20 × 242 × 51	12, 15, 20, 25, 30 × 5, 11	10 pcs.	01485
3	20 × 191 × 50	12, 15, 20, 25, 30 × 5, 10	10 pcs.	01495