



Undervoltage release, 2early N/O, for delay unit

Part no. NZM1-XUVHIVL
Catalog No. 271608

Delivery program

Product range		Accessories
Accessories		Undervoltage release
Accessories		Undervoltage release for use with delay unit UVU
Standard/Approval		IEC
Construction size		NZM1
Description		Combination of separate delay unit and special releases. For use with emergency-stop devices in connection with an emergency-stop button. not UL/CSA approved Special releases for combining with separate delay time. UVU-NZM delay unit is additionally required. Cannot be installed simultaneously with separate NZM...-XHIV early-make auxiliary contact or NZM...-XA... shunt release. Cannot be used in conjunction with NZM...-XR... remote operator. Early make of auxiliary contact on switching on and off (manual operation): approx. 20 ms.
Connection type		with 3 m loose connection cable instead of screw termination
Auxiliary contacts		with 2 early-make auxiliary contacts
For use with		NZM1(-4) N(S)1(-4)

Technical data

Undervoltage releases, off-delayed

Rated operational voltage	U _e	V	
	U _e	V DC	18
Terminal capacities		mm ²	
Solid or flexible conductor, with ferrule		mm ²	1 x (0,75 - 2,5) 2 x (0,75 - 2,5)
		AWG	1 x (18 ... 14) 2 x (18 ... 14)

Design verification as per IEC/EN 61439

IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.

10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Under voltage coil (EC001022)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Undervoltage trip (ec1@ss10.0.1-27-37-04-17 [AKF015013])

Rated control supply voltage U_s at AC 50HZ	V	0 - 0
Rated control supply voltage U_s at AC 60HZ	V	0 - 0
Rated control supply voltage U_s at DC	V	0 - 0
Voltage type for actuating		DC
Type of electric connection		Screw connection
Number of contacts as normally open contact		1
Number of contacts as normally closed contact		0
Number of contacts as change-over contact		0
Delayed		Yes
Suitable for power circuit breaker		Yes
Suitable for off-load switch		Yes
Suitable for motor safety switch		No
Suitable for overload relay		No

Approvals

Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL Category Control No.	DIHS
CSA File No.	022086
CSA Class No.	1437-01
North America Certification	UL listed, CSA certified

Dimensions

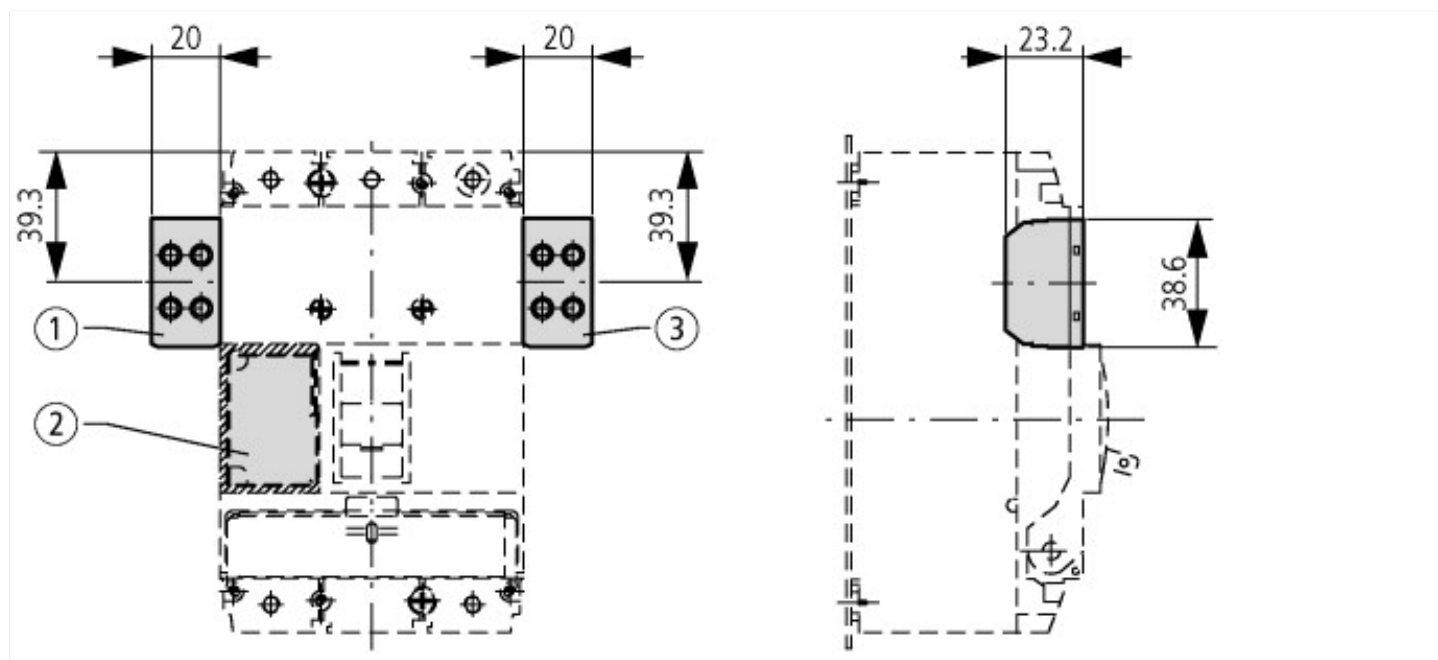

- ①
NZM1-XA(HIV)
NZM1-XU(HIV)(20)
NZM1-XHIV
- ②
NZM1-XA(HIV)(L)
NZM1-XU(V)(HIV)(L)(20)
NZM1-XHIV(L)

Additional product information (links)

IL01203002Z (AWA1230-1914) Shunt release, Undervoltage release, Early-make auxiliary contact

IL01203002Z (AWA1230-1914) Shunt release, Undervoltage release, Early-make auxiliary contact	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01203002Z2010_11.pdf
--	---