




Reversing starter, 24 V DC, 0,18 - 2,4 A, Push in terminals, SmartWire-DT slave



Part no. EMS-RO-T-2,4-SWD  
 Catalog No. 170108  
 Alternate Catalog No. EMS-RO-T-2P4-SWD

**Delivery program**

				This item is only available for a limited time. Replacement item: Art. no. 192384, Type: EMS2-RO-T-3-SWD
Product range				Electronic motor starter
Product range				SmartWire-DT slave
Subrange				SmartWire-DT electronic motor starters
Basic function				Reversing starters (complete devices)
Function				For connecting to SmartWire-DT for expanded diagnostics.
Description				DOL starting Reversing start Motor protection Circuit design: safety output stage with bypass, three-phase disconnect. Motor current additionally adjustable via SmartWire-DT.
Messages				Operational readiness Operating direction feedback Motor current in % Motor current in A Thermal motor image in % Overload prewarning Trip indications (overload, phase failure, etc.) Set short-circuit release value Device Type
Commands				Operating the motor starter Manual reset Automatic reset
<b>Motor ratings</b>				
Max. rating for three-phase motors, 50 - 60 Hz				
AC-53a				
380 V 400 V 415 V	P	kW		0.06 - 0.75
Setting range of overload releases	I <sub>r</sub>	A <sub>x</sub>		0,18 - 2,4
				
Actuating voltage				24 V DC
Connection technique				Push in terminals
Connection to SmartWire-DT				yes

**Technical data**

<b>General</b>				
Standards				IEC/EN 60947-4-2
Dimensions				
Width		mm		30
Height		mm		157
Depth		mm		124
Weight		kg		0.3
Mounting				Top-hat rail IEC/EN 60715, 35 mm
Protection type (IEC/EN 60529, EN50178, VBG 4)				IP20
Mounting position				Vertical
Lifespan, electrical	Operations			3 x 10 <sup>7</sup>
Max. switching frequency			Operations/h	3/200 (pulse pause time 50:50)

Terminal capacity			
Solid		mm <sup>2</sup>	1 x (0.2 - 2.5) 1 x AWG20 - 14
flexible, with ferrule		mm <sup>2</sup>	2 x (0.2 - 2.5) 1 x AWG24 - 14
Notes			Minimum length 10 mm.
flexible, with twin ferrule		mm <sup>2</sup>	2 x (0.2 - 1.5) 2 x AWG24 - 16
Notes			Minimum length 10 mm.

### Climatic environmental conditions

Operating ambient temperature		°C	-5 - +60, in accordance with IEC 60068-2-1
Storage	θ	°C	-40 - +80

### Main conducting paths

Rated impulse withstand voltage	U <sub>imp</sub>	V AC	6000
Overvoltage category/pollution degree			III/2
Rated operational voltage	U <sub>e</sub>	V	42 - 550
Rated operational current			
AC-51	I <sub>e</sub>	A	0.15 - 2.40
AC-53a	I <sub>e</sub>	A	0.15 - 2.4
Heat dissipation	P <sub>V</sub>	W	0.1 - 2
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	1
Basic insulation to IEC/EN60947-1			
between feedback signal output and switch voltage		V AC	500
Current measurement			
Setting range of overload releases	I <sub>r</sub>	A_x	0,18 - 2,4
Release class		CLASS	10
Recovery time	t <sub>W</sub>	min.	2 (manual startup) 20 (automatic restart)
Balance monitoring			
Magnitude I <sub>max</sub> > I <sub>rated</sub> ((I <sub>max</sub> - I <sub>min</sub> )/I <sub>max</sub> )		%	If ≥ 33, pick-up time of 120 s If ≥ 67, pick-up time of 1.8 s
Magnitude I <sub>max</sub> < I <sub>rated</sub> ((I <sub>max</sub> - I <sub>min</sub> )/I <sub>rated</sub> )		%	If ≥ 33, pick-up time of 120 s If ≥ 67, pick-up time of 1.8 s
Stall protection			
Pick-up time I (L1) or I (L3)		A	33
Pick-up time		S	0.5
Short-circuit rating			
Type "1" coordination			
Short-circuit protective device			50 kA, 500 V AC: Fuse 16 A gG/gL 50 kA, 500 V AC: fuse 30 A CCMR 50 kA, 415 V AC: PKM0-4 15 kA, 415 V AC: PKM0-6,3 2.5 kA, 400 V AC: FAZ-B16/3

### Control section

Input data			
Supply voltage	U <sub>AUX</sub>	V DC	24 (-15 - +20 %)
Residual ripple on the input voltage		%	≤ 5
Input current		mA	70
Current draw inrush		mA	120
Current draw (operation)	U <sub>AUX</sub>	mA	50

### Electromagnetic compatibility (EMC)

Electrostatic discharge (ESD)			
applied standard			IEC/EN 61000-4-2, Level 3
Air discharge		kV	8
Contact discharge		kV	6
Electromagnetic fields (RFI)			
applied standard			IEC/EN 61000-4-3
		V/m	800 - 1000 MHz: 10 1.4 - 2 GHz: 10 2.0 - 2.7 GHz: 3
Radio interference suppression			EN 55011, Class A (emitted interference, line-conducted)

Note on use		EN 61000-6-3, Class A (emitted interference, radiated)
Burst	kV	2 IEC/EN 61000-4-4, level 3
power pulses (Surge)		1 kV (symmetrical) 2 kV (asymmetrical) according to IEC/EN 61000-4-5
Immunity to line-conducted interference to (IEC/EN 61000-4-6)	V	10

## Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	$I_n$	A	2.4
Heat dissipation per pole, current-dependent	$P_{vid}$	W	0.7
Equipment heat dissipation, current-dependent	$P_{vid}$	W	2.1
Static heat dissipation, non-current-dependent	$P_{vs}$	W	1
Heat dissipation capacity	$P_{diss}$	W	0
Operating ambient temperature min.		°C	-5
Operating ambient temperature max.		°C	60
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

## Technical data ETIM 7.0


Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss10.0.1-27-37-09-05 [AJZ718013])			
Kind of motor starter			Reversing starter
With short-circuit release			No
Rated control supply voltage $U_s$ at AC 50HZ		V	0 - 0
Rated control supply voltage $U_s$ at AC 60HZ		V	0 - 0
Rated control supply voltage $U_s$ at DC		V	24 - 24

Voltage type for actuating		DC
Rated operation power at AC-3, 230 V, 3-phase	kW	0.37
Rated operation power at AC-3, 400 V	kW	0.75
Rated power, 460 V, 60 Hz, 3-phase	kW	0.736
Rated power, 575 V, 60 Hz, 3-phase	kW	0
Rated operation current I <sub>e</sub>	A	2.4
Rated operation current at AC-3, 400 V	A	2.4
Overload release current setting	A	0.18 - 2.4
Rated conditional short-circuit current, type 1, 480 Y/277 V	A	0
Rated conditional short-circuit current, type 1, 600 Y/347 V	A	0
Rated conditional short-circuit current, type 2, 230 V	A	0
Rated conditional short-circuit current, type 2, 400 V	A	0
Number of auxiliary contacts as normally open contact		0
Number of auxiliary contacts as normally closed contact		0
Ambient temperature, upper operating limit	°C	60
Temperature compensated overload protection		Yes
Release class		CLASS 10
Type of electrical connection of main circuit		Spring clamp connection
Type of electrical connection for auxiliary- and control current circuit		Spring clamp connection
Rail mounting possible		Yes
With transformer		No
Number of command positions		0
Suitable for emergency stop		No
Coordination class according to IEC 60947-4-3		Class 1
Number of indicator lights		4
External reset possible		Yes
With fuse		No
Degree of protection (IP)		IP20
Degree of protection (NEMA)		Other
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		No
Supporting protocol for CAN		No
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for MODBUS		No
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		Yes
Width	mm	30
Height	mm	157
Depth	mm	139


## Approvals

Product Standards		IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14; CE marking
UL File No.		E29096
UL Category Control No.		NLDX, NLDX7
CSA File No.		UL report applies to both US and Canada
North America Certification		UL listed, certified by UL for use in Canada
Specially designed for North America		No

## Characteristics

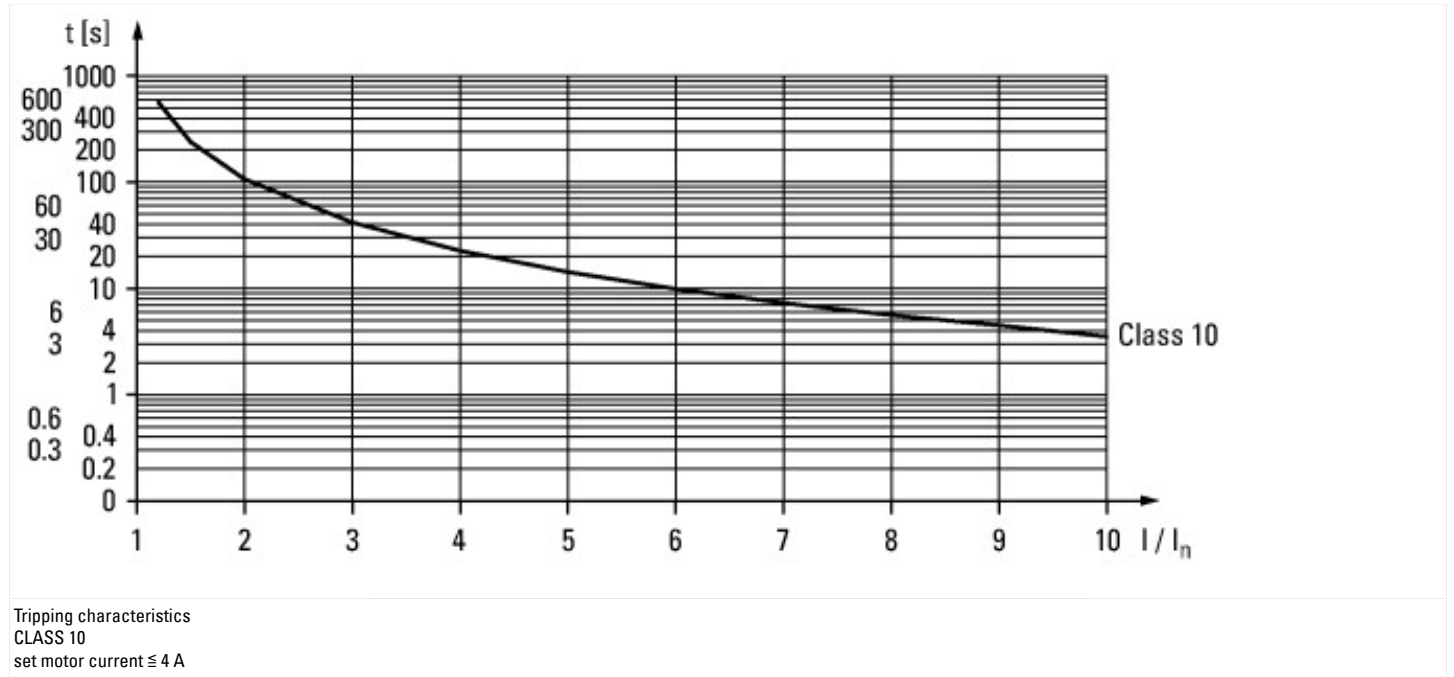

## Dimensions

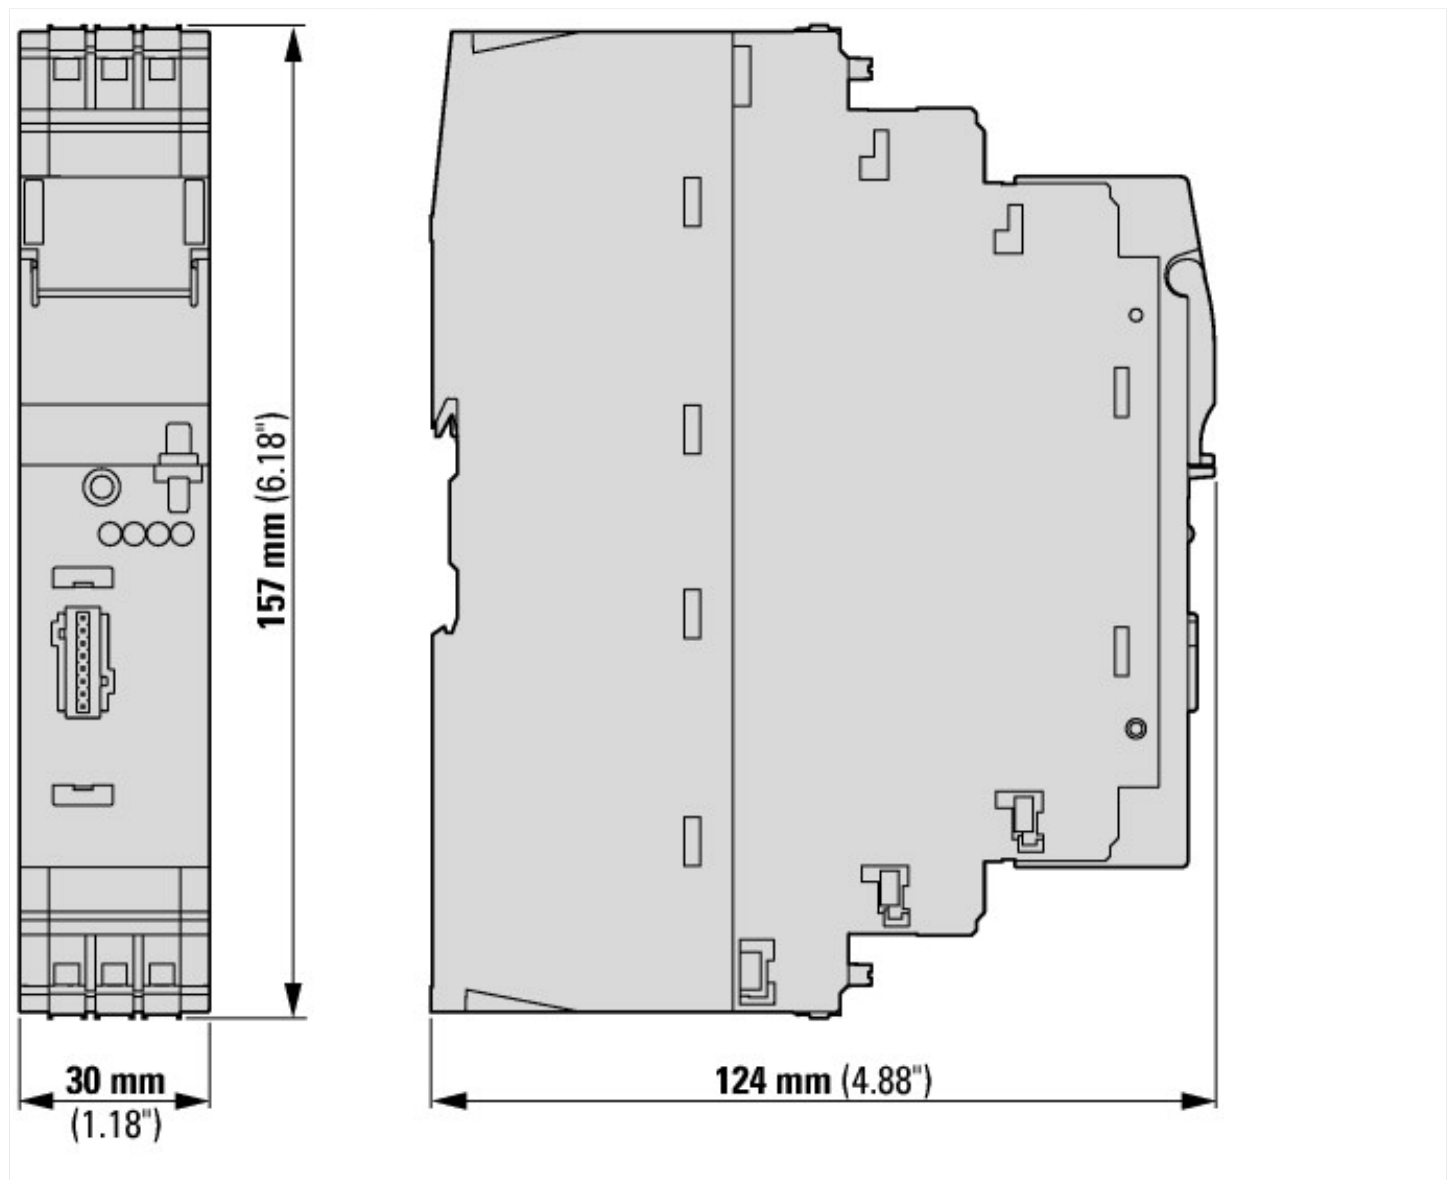

## Additional product information (links)

### IL120002ZU Electronic motor starter with SWD connection

IL120002ZU Electronic motor starter with SWD connection [https://es-assets.eaton.com/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL120002ZU2018\\_04.pdf](https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL120002ZU2018_04.pdf)

### MN034002ZU EMS-...-SWD electronic motor starter/EMS electronic motor starter

MN034002ZU EMS-...-SWD electronic motor starter/EMS electronic motor starter - Deutsch / English [https://es-assets.eaton.com/DOCUMENTATION/AWB\\_MANUALS/MN034002ZU\\_DE\\_EN.pdf](https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN034002ZU_DE_EN.pdf)

Produktinformation EMS, Hinweise zur Projektierung [http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct\\_1040938\\_de.pdf](http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1040938_de.pdf)