





Contactor, 380 V 400 V 160 kW, 2 N/O, 2 NC, RDC 48: 24 - 48 V DC, DC operation, Screw connection

Part no. DILM300A/22(RDC48)
Catalog No. 139554
Alternate Catalog No. XTCE300L22TD
EL-Nummer (Norway) 4134294


Delivery program

| | | | |
|---|----------------|----|--|
| Product range | | | Contactors |
| Application | | | Contactors for Motors |
| Subrange | | | Comfort devices greater than 170 A |
| Utilization category | | | AC-1: Non-inductive or slightly inductive loads, resistance furnaces NAC-3: Normal AC induction motors: starting, switch off during running AC-4: Normal AC induction motors: starting, plugging, reversing, inching |
| Connection technique | | | Screw connection |
| Rated operational current | | | |
| AC-3 | | | |
| 380 V 400 V | I_e | A | 300 |
| AC-1 | | | |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz | | | |
| Open | | | |
| at 40 °C | $I_{th} = I_e$ | A | 490 |
| enclosed | I_{th} | A | 315 |
| Conventional free air thermal current, 1 pole | | | |
| open | I_{th} | A | 875 |
| enclosed | I_{th} | A | 785 |
| Max. rating for three-phase motors, 50 - 60 Hz | | | |
| AC-3 | | | |
| 220 V 230 V | P | kW | 90 |
| 380 V 400 V | P | kW | 160 |
| 660 V 690 V | P | kW | 170 |
| 1000 V | P | kW | 132 |
| AC-4 | | | |
| 220 V 230 V | P | kW | 75 |
| 380 V 400 V | P | kW | 132 |
| 660 V 690 V | P | kW | 137 |
| 1000 V | P | kW | 108 |
| Contact sequence | | |  |
| Can be combined with auxiliary contact | | | DILM820-XHI... |
| Actuating voltage | | | RDC 48: 24 - 48 V DC |
| Voltage AC/DC | | | DC operation |
| Contacts | | | |
| N/O = Normally open | | | 2 N/O |
| N/C = Normally closed | | | 2 NC |
| Auxiliary contacts | | | |
| possible variants at auxiliary contact module fitting options | | | on the side: 2 x DILM820-XHI11(V)-SI; 2 x DILM820-XHI11-SA |
| Side mounting auxiliary contacts | | |  |
| Instructions | | | Interlocked opposing contacts according to IEC/EN 60947-5-1 Appendix L, inside the auxiliary contact module |

| | | |
|---------------------|--|--|
| | | Auxiliary contacts used as mirror contacts according to IEC/EN 60947-4-1 Appendix F (not N/C late open) |
| Instructions | | integrated suppressor circuit in actuating electronics 660 V, 690 V or 1000 V: not directly reversing |

Technical data

General
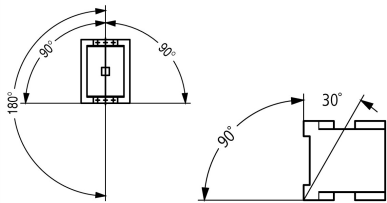
| | | | |
|---|-------------------------------------|-----------------|---|
| Standards | | | IEC/EN 60947, VDE 0660, UL, CSA |
| Lifespan, mechanical | | | |
| DC operated | Operations | $\times 10^6$ | 10 |
| Operating frequency, mechanical | | | |
| DC operated | Operations/h | | 3000 |
| Climatic proofing | | | Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature | | | |
| Open | | °C | -40 - +60 |
| Enclosed | | °C | - 40 - + 40 |
| Storage | | °C | - 40 - + 80 |
| Mounting position | | |  |
| Mechanical shock resistance (IEC/EN 60068-2-27) | | | |
| Half-sinusoidal shock, 10 ms | | | |
| Main contacts | | | |
| N/O contact | | g | 10 |
| Auxiliary contacts | | | |
| N/O contact | | g | 10 |
| N/C contact | | g | 8 |
| Degree of Protection | | | IP00 |
| Protection against direct contact when actuated from front (EN 50274) | | | Finger and back-of-hand proof with terminal shroud or terminal block |
| Altitude | | m | Max. 2000 |
| Weight | | | |
| AC operated | | kg | 7.1 |
| DC operated | | kg | 7.1 |
| Weight | | kg | 7.1 |
| Terminal capacity main cable | | | |
| Flexible with cable lug | | mm ² | 50 - 240 |
| Stranded with cable lug | | mm ² | 70 - 240 |
| Solid or stranded | | AWG | 2/0 - 500 MCM |
| Flat conductor | Lamellenzahl x Breite x Dicke | mm | Fixing with flat cable terminal or cable terminal blocks See terminal capacity for cable terminal blocks |
| Busbar | Width | mm | 25 |
| Main cable connection screw/bolt | | | M10 |
| Tightening torque | | Nm | 24 |
| Terminal capacity control circuit cables | | | |
| Solid | | mm ² | 1 x (0.75 - 2.5) 2 x (0.75 - 2.5) |
| Flexible with ferrule | | mm ² | 1 x (0.75 - 2.5) 2 x (0.75 - 2.5) |
| Solid or stranded | | AWG | 18 - 14 |
| Control circuit cable connection screw/bolt | | | M3.5 |
| Tightening torque | | Nm | 1.2 |
| Tool | | | |
| Main cable | | | |

| | | |
|------------------------|------|----|
| Width across flats | mm | 16 |
| Control circuit cables | | |
| Pozidriv screwdriver | Size | 2 |

Main conducting paths

| | | | |
|--|--------------|------|---|
| Rated impulse withstand voltage | U_{imp} | V AC | 8000 |
| Overvoltage category/pollution degree | | | III/3 |
| Rated insulation voltage | U_i | V AC | 1000 |
| Rated operational voltage | U_e | V AC | 1000 |
| Safe isolation to EN 61140 | | | |
| between coil and contacts | | V AC | 500 |
| between the contacts | | V AC | 500 |
| Making capacity (p.f. to IEC/EN 60947) | | A | 3600 |
| Breaking capacity | | | |
| 220 V 230 V | | A | 3000 |
| 380 V 400 V | | A | 3000 |
| 500 V | | A | 3000 |
| 660 V 690 V | | A | 3000 |
| 1000 V | | A | 950 |
| Component lifespan | | | AC1: See → Engineering, characteristic curves AC3: See → Engineering, characteristic curves AC4: See → Engineering, characteristic curves |
| Short-circuit rating | | | |
| Short-circuit protection maximum fuse | | | |
| Type "2" coordination | | | |
| 400 V | gG/gL 500 V | A | 400 |
| 690 V | gG/gL 690 V | A | 315 |
| 1000 V | gG/gL 1000 V | A | 160 |
| Type "1" coordination | | | |
| 400 V | gG/gL 500 V | A | 400 |
| 690 V | gG/gL 690 V | A | 400 |
| 1000 V | gG/gL 1000 V | A | 200 |

AC

| | | | |
|---|----------------|---|--|
| AC-1 | | | |
| Rated operational current | | | |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz | | | |
| Open | | | |
| at 40 °C | $I_{th} = I_e$ | A | 490 |
| at 50 °C | $I_{th} = I_e$ | A | 438 |
| at 55 °C | $I_{th} = I_e$ | A | 418 |
| at 60 °C | $I_{th} = I_e$ | A | 400 |
| enclosed | I_{th} | A | 315 |
| Notes | | | At maximum permissible ambient air temperature. |
| Conventional free air thermal current, 1 pole | | | |
| Note | | | at maximum permissible ambient air temperature |
| open | I_{th} | A | 875 |
| enclosed | I_{th} | A | 785 |
| AC-3 | | | |
| Rated operational current | | | |
| Open, 3-pole: 50 – 60 Hz | | | |
| Notes | | | At maximum permissible ambient temperature (open.) |
| 220 V 230 V | I_e | A | 300 |
| 240 V | I_e | A | 300 |
| 380 V 400 V | I_e | A | 300 |
| 415 V | I_e | A | 300 |

| | | | |
|--------------|----------------|-----|-----|
| 440V | I _e | A | 300 |
| 500 V | I _e | A | 300 |
| 660 V 690 V | I _e | A | 185 |
| 1000 V | I _e | A | 95 |
| Motor rating | P | kWh | |
| 220 V 230 V | P | kW | 90 |
| 240V | P | kW | 100 |
| 380 V 400 V | P | kW | 160 |
| 415 V | P | kW | 175 |
| 440 V | P | kW | 185 |
| 500 V | P | kW | 210 |
| 660 V 690 V | P | kW | 170 |
| 1000 V | P | kW | 132 |

AC-4

| | | | |
|---------------------------|----------------|-----|-----|
| Rated operational current | | | |
| Open, 3-pole: 50 – 60 Hz | | | |
| 220 V 230 V | I _e | A | 240 |
| 240 V | I _e | A | 240 |
| 380 V 400 V | I _e | A | 240 |
| 415 V | I _e | A | 240 |
| 440 V | I _e | A | 240 |
| 500 V | I _e | A | 240 |
| 660 V 690 V | I _e | A | 150 |
| 1000 V | I _e | A | 76 |
| Motor rating | P | kWh | |
| 220 V 230 V | P | kW | 75 |
| 240 V | P | kW | 82 |
| 380 V 400 V | P | kW | 132 |
| 415 V | P | kW | 142 |
| 440 V | P | kW | 150 |
| 500 V | P | kW | 170 |
| 660 V 690 V | P | kW | 137 |
| 1000 V | P | kW | 108 |

Condensator operation

| | | | |
|---|------------|-------------------|-----|
| Individual compensation, rated operational current I _e of three-phase capacitors | | | |
| Open | | | |
| up to 525 V | | A | 307 |
| 690 V | | A | 177 |
| Max. inrush current peak | | x I _e | 30 |
| Component lifespan | Operations | x 10 ⁶ | 0.1 |
| Max. operating frequency | | Ops/h | 200 |

DC

| | | | |
|---------------------------------|--|--|-------------------------------------|
| Rated operational current, open | | | |
| DC-1 | | | |
| Notes | | | see DILDC300/DILDC600 or on request |

Current heat loss

| | | | |
|---|--|----|-------|
| 3 pole, at I _{th} (60°) | | W | 37 |
| Current heat loss at I _e to AC-3/400 V | | W | 21 |
| Impedance per pole | | mΩ | 0.077 |

Magnet systems

| | | | |
|-------------------|----------|--|--|
| Voltage tolerance | | | |
| U _S | | | 24 - 48 V DC |
| DC operated | Pick-up | | 0.7 x U _{S min} - 1.15 x U _{S max} |
| DC operated | Drop-out | | 0.2 x U _{S max} - 0.6 x U _{S min} |

| | | | |
|--|---------|------------|---|
| Power consumption of the coil in a cold state and $1.0 \times U_S$ | | | |
| Note on power consumption | | | Control transformer with $u_k \leq 6\%$ |
| Pull-in power | Pick-up | VA | 380 |
| Pull-in power | Pick-up | W | 250 |
| Sealing power | Sealing | W | 4.6 |
| Duty factor | | % DF | 100 |
| Changeover time at 100 % U_S (recommended value) | | | |
| Main contacts | | | |
| Closing delay | | ms | 100 |
| Opening delay | | ms | 110 |
| Behaviour in marginal and transitional conditions | | | |
| Sealing | | | |
| Voltage interruptions | | | |
| $(0 \dots 0.2 \times U_{c \min}) \leq 10 \text{ ms}$ | | | Time is bridged successfully |
| $(0 \dots 0.2 \times U_{c \min}) > 10 \text{ ms}$ | | | Drop-out of the contactor |
| Voltage drops | | | |
| $(0.2 \dots 0.6 \times U_{c \min}) \leq 12 \text{ ms}$ | | | Time is bridged successfully |
| $(0.2 \dots 0.6 \times U_{c \min}) > 12 \text{ ms}$ | | | Drop-out of the contactor |
| $(0.6 \dots 0.7 \times U_{c \min})$ | | | Contactor remains switched on |
| Excess voltage | | | |
| $(1.15 \dots 1.3 \times U_{c \max})$ | | | Contactor remains switched on |
| Pick-up phase | | | |
| $(0 \dots 0.7 \times U_{c \min})$ | | | Contactor does not switch on |
| $(0.7 \times U_{c \min} \dots 1.15 \times U_{c \max})$ | | | Contactor switches on with certainty |
| Admissible transitional contact resistance (of the external control circuit device when actuating A11) | | m Ω | ≤ 500 |
| PLC signal level (A3 - A4) to IEC/EN 61131-2 (type 2) | | | |
| High | | V | 15 |
| Low | | V | 5 |

Electromagnetic compatibility (EMC)

| | | | |
|-------------------------------|--|--|---|
| Electromagnetic compatibility | | | This product is designed for operation in industrial environments (environment A). Its use in residential environments (environment B) may cause radio-frequency interference, requiring additional noise suppression measures. |
|-------------------------------|--|--|---|

Rating data for approved types

| | | | |
|------------------------------|--|----|------|
| Switching capacity | | | |
| Maximum motor rating | | | |
| Three-phase | | | |
| 200 V 208 V | | HP | 100 |
| 230 V 240 V | | HP | 125 |
| 460 V 480 V | | HP | 250 |
| 575 V 600 V | | HP | 300 |
| General use | | A | 350 |
| Auxiliary contacts | | | |
| Pilot Duty | | | |
| AC operated | | | A600 |
| DC operated | | | P300 |
| General Use | | | |
| AC | | V | 600 |
| AC | | A | 15 |
| DC | | V | 250 |
| DC | | A | 1 |
| Short Circuit Current Rating | | | |
| Basic Rating | | | |
| SCCR | | kA | 18 |

| | | |
|---|----|-------------|
| max. Fuse | A | 700 |
| max. CB | A | 600 |
| 480 V High Fault | | |
| SCCR (fuse) | kA | 18 |
| max. Fuse | A | 700 Class L |
| SCCR (CB) | kA | 65 |
| max. CB | A | 250 |
| 600 V High Fault | | |
| SCCR (fuse) | kA | 18 |
| max. Fuse | A | 700 Class J |
| SCCR (CB) | kA | 18 |
| max. CB | A | 600 |
| Special Purpose Ratings | | |
| Definite Purpose Ratings (100,000 cycles acc. to UL 1995) | | |
| LRA 480V 60Hz 3phase | A | 2160 |
| FLA 480V 60Hz 3phase | A | 360 |
| LRA 600V 60Hz 3phase | A | 1800 |
| FLA 600V 60Hz 3phase | A | 300 |

Design verification as per IEC/EN 61439

| | | | |
|--|------------|----|--|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | I_n | A | 300 |
| Heat dissipation per pole, current-dependent | P_{vid} | W | 7 |
| Equipment heat dissipation, current-dependent | P_{vid} | W | 0 |
| Static heat dissipation, non-current-dependent | P_{vs} | W | 4.6 |
| Heat dissipation capacity | P_{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -40 |
| Operating ambient temperature max. | | °C | 60 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | Meets the product standard's requirements. |
| 10.2.3 Verification of thermal stability of enclosures | | | |
| 10.2.3.1 Verification of resistance of insulating materials to normal heat | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | | |
| 10.9.2 Power-frequency electric strength | | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |


Technical data ETIM 7.0

| | | | |
|---|----|--|-----------------|
| Low-voltage industrial components (EG000017) / Power contactor, AC switching (EC000066) | | | |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss10.0.1-27-37-10-03 [AAB718015]) | | | |
| Rated control supply voltage Us at AC 50HZ | V | | 0 - 0 |
| Rated control supply voltage Us at AC 60HZ | V | | 0 - 0 |
| Rated control supply voltage Us at DC | V | | 24 - 48 |
| Voltage type for actuating | | | DC |
| Rated operation current Ie at AC-1, 400 V | A | | 490 |
| Rated operation current Ie at AC-3, 400 V | A | | 300 |
| Rated operation power at AC-3, 400 V | kW | | 160 |
| Rated operation current Ie at AC-4, 400 V | A | | 240 |
| Rated operation power at AC-4, 400 V | kW | | 132 |
| Rated operation power NEMA | kW | | 186 |
| Modular version | | | No |
| Number of auxiliary contacts as normally open contact | | | 2 |
| Number of auxiliary contacts as normally closed contact | | | 2 |
| Type of electrical connection of main circuit | | | Rail connection |
| Number of normally closed contacts as main contact | | | 0 |
| Number of main contacts as normally open contact | | | 3 |

Approvals

| | | | |
|--------------------------------------|--|--|--|
| Product Standards | | | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking |
| UL File No. | | | E29096 |
| UL Category Control No. | | | NLDX |
| CSA File No. | | | 1017510 |
| CSA Class No. | | | 3211-04 |
| North America Certification | | | UL listed, CSA certified |
| Specially designed for North America | | | No |

Characteristics

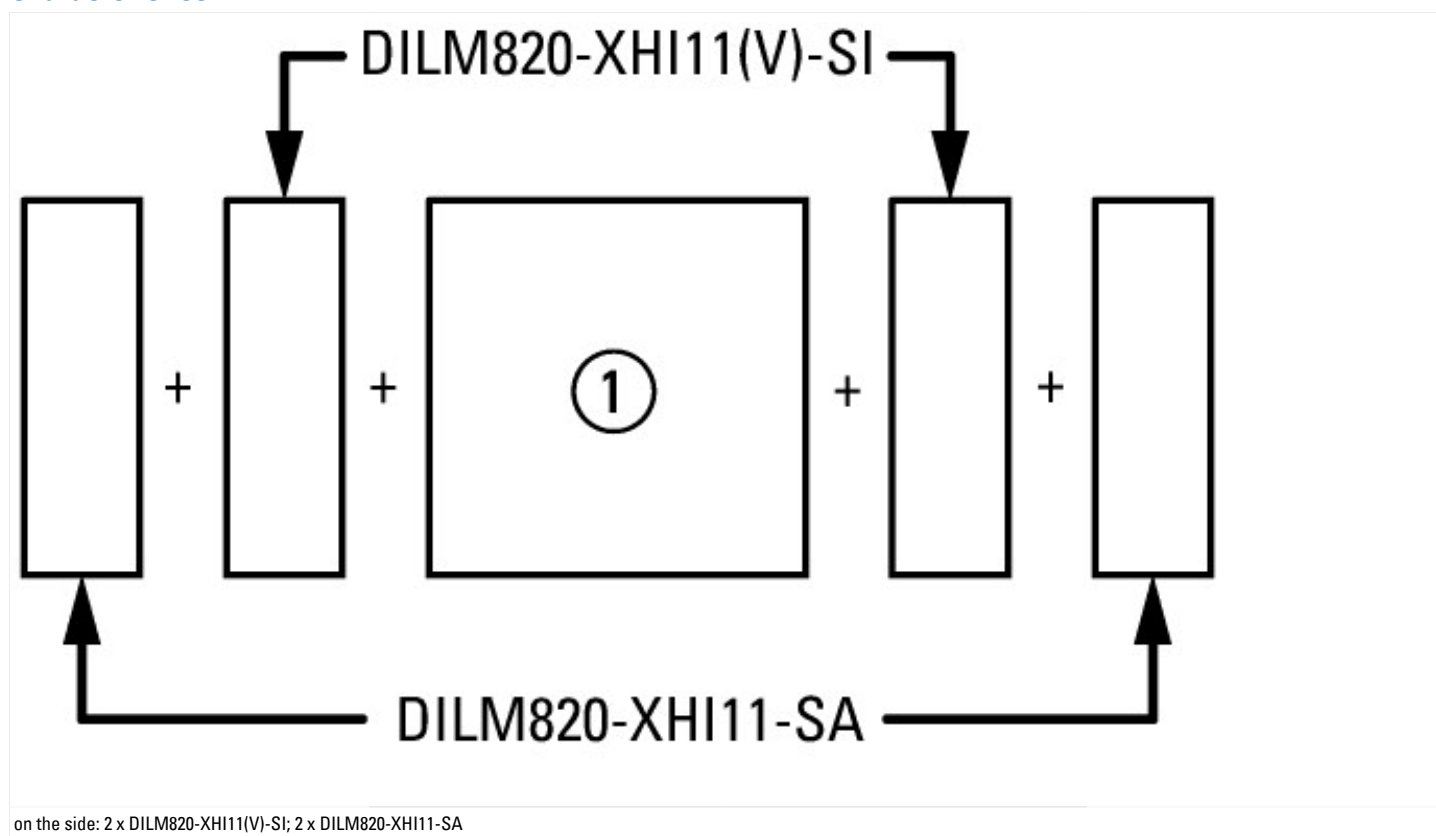



Normal switching duty
 Normal AC induction motor
 Operating characteristics
 Switch on: from stop
 Switch off: during run
 Electrical characteristics:
 Switch on: up to 6 x Rated motor current
 Switch off: up to 1 x Rated motor current
 Utility category
 100 % AC-3
 Typical Applications
 Compressors
 Lifts
 Mixers
 Pumps
 Escalators
 Agitators
 fan
 Conveyor belts
 Centrifuges
 Hinged flaps
 Bucket-elevator
 Air-conditioning systems
 General drives for manufacturing and processing machines



Extreme switching duty
 Squirrel-cage motor
 Operating characteristics
 Inching, plugging, reversing
 Electrical characteristics
 Make: up to 6 x rated motor current
 Break: up to 6 x rated motor current
 Utilization category
 100 % AC-4
 Typical applications
 Printing presses
 Wire-drawing machines
 Centrifuges
 Special drives for manufacturing and processing machines




Switching conditions for 3 pole, non-motor loads
 Operating characteristics
 Non inductive and slightly inductive loads
 Electrical characteristics
 Switch on: 1 x rated operational current
 Switch off: 1 x rated operational current
 Utilization category
 100 % AC-1
 Typical examples of application
 Electric heat



Short-time loading, 3-pole
Time interval between two loading cycles: 15 minutes

Dimensions

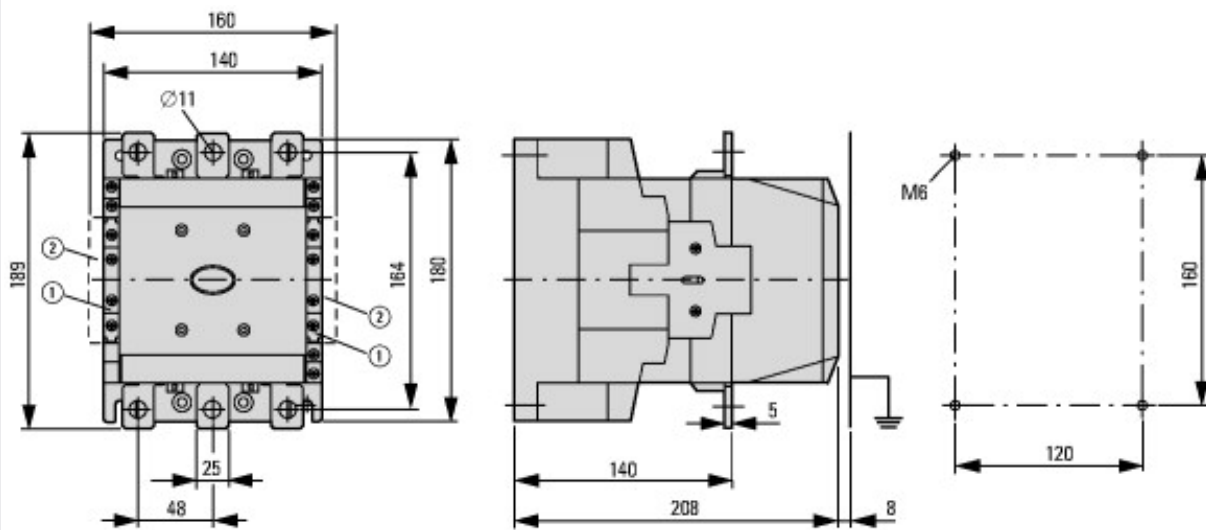

- ① DILM820-XHI11(V)-SI
- ② DILM820-XHI11-SA

Additional product information (links)

Motor starters and "Special Purpose Ratings" for the North American market

http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf

| | |
|--|---|
| Switchgear of Power Factor Correction Systems | http://www.moeller.net/binary/ver_techpapers/ver934en.pdf |
| X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely | http://www.moeller.net/binary/ver_techpapers/ver938en.pdf |
| Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions | http://www.moeller.net/binary/ver_techpapers/ver944en.pdf |
| Effect of the Cabel Capacitance of Long Control Cables on the Actuation of Contactors | http://www.moeller.net/binary/ver_techpapers/ver949en.pdf |
| Switchgear for Luminaires | http://www.moeller.net/binary/ver_techpapers/ver955en.pdf |
| Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts | http://www.moeller.net/binary/ver_techpapers/ver956en.pdf |
| The Interaction of Contactors with PLCs | http://www.moeller.net/binary/ver_techpapers/ver957en.pdf |
| Busbar Component Adapters for modern Industrial control panels | http://www.moeller.net/binary/ver_techpapers/ver960en.pdf |