



**Miniature circuit breaker (MCB), 0.5 A, 2p, characteristic: D**



**Part no.** FAZ-D0,5/2-RT  
**Catalog No.** 102217  
**Alternate Catalog No.** FAZ-D0.5/2-RT  
**EL-Nummer (Norway)** 1691853

Similar to illustration

**Delivery program**

Basic function			Miniature circuit-breakers
Number of poles			2 pole
Tripping characteristic			D
Application			Switchgear for industrial and advanced commercial applications
Rated current	$I_n$	A	0.5
Rated switching capacity acc. to IEC/EN 60947-2	$I_{cu}$	kA	15
Product range			FAZ-RT

**Technical data**

**Electrical**

Standards			UL 489, CSA C22.2 No. 5 IEC 60947-2
Rated operational voltage	$U_e$	V	
	$U_e$	V AC	277/480 Y
		V DC	60
Rated voltage according to IEC/EN 60947-2	$U_n$	V AC	415
Rated voltage according to UL	$U_n$	V AC	480Y/277
Rated switching capacity acc. to IEC/EN 60947-2	$I_{cu}$	kA	15
Characteristic			B, C, D
Selectivity Class			3
lifespan			
	Lifespan	Operations	> 20000
Direction of incoming supply			as required

**Mechanical**

Standard front dimension		mm	45
Enclosure height		mm	105
Mounting width per pole		mm	17.7
Mounting			IEC/EN 60715 top-hat rail
Degree of Protection			IP20, IP40 (when fitted)
Terminals top and bottom			Twin-purpose terminals
Terminal protection			Finger and back-of-hand proof to BGV A2
Tightening torque of fixing screws		N/m	max. 2.4 UL: #18-12 AWG: 2.4 Nm (21 lb-in) #10-8 AWG: 2.8 Nm (25 lb-in) #6 AWG: 4 Nm (36 lb-in)
Mounting position			As required

**Design verification as per IEC/EN 61439**

Technical data for design verification			
Rated operational current for specified heat dissipation	$I_n$	A	0.5
Heat dissipation per pole, current-dependent	$P_{vid}$	W	0
Equipment heat dissipation, current-dependent	$P_{vid}$	W	2.36
Static heat dissipation, non-current-dependent	$P_{vs}$	W	0

Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	75
			linear, per +1 °C, results in a 0.5% reduction of current carrying capacity

## Technical data ETIM 7.0

Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)


Electric engineering, automation, process control engineering / Electrical installation, device / Miniature circuit breaker system (MCB) / Miniature circuit breaker (MCB)  
(ec@ss10.0.1-27-14-19-01 [AAB905014])

Release characteristic			D
Number of poles (total)			2
Number of protected poles			2
Rated current		A	0.5
Rated voltage		V	415
Rated insulation voltage U <sub>i</sub>		V	440
Rated impulse withstand voltage U <sub>imp</sub>		kV	4
Rated short-circuit breaking capacity I <sub>cn</sub> EN 60898 at 230 V		kA	0
Rated short-circuit breaking capacity I <sub>cn</sub> EN 60898 at 400 V		kA	0
Rated short-circuit breaking capacity I <sub>cu</sub> IEC 60947-2 at 230 V		kA	15
Rated short-circuit breaking capacity I <sub>cu</sub> IEC 60947-2 at 400 V		kA	15
Voltage type			AC
Frequency		Hz	50 - 60
Current limiting class			3
Suitable for flush-mounted installation			No
Concurrently switching N-neutral			No
Over voltage category			3
Pollution degree			2
Additional equipment possible			Yes
Width in number of modular spacings			2
Built-in depth		mm	70.5
Degree of protection (IP)			IP20
Ambient temperature during operating		°C	-25 - 75
Connectable conductor cross section multi-wired		mm <sup>2</sup>	1 - 25
Connectable conductor cross section solid-core		mm <sup>2</sup>	1 - 25


## Approvals

Product Standards			IEC/EN 60947-2; EN 45545-2; IEC 61373; UL 489; CSA-C22.2 No. 5-09; CE marking
UL File No.			E235139
UL Category Control No.			DIVQ
CSA File No.			204453
CSA Class No.			1432-01
North America Certification			UL listed, CSA certified
Specially designed for North America			Yes, suitable as BCPD
Suitable for			Feeder circuits, branch circuits
Current Limiting Circuit-Breaker			Yes
Max. Voltage Rating			≤ 32 A
Degree of Protection			IEC: IP20, UL/CSA Type: -

# Characteristics

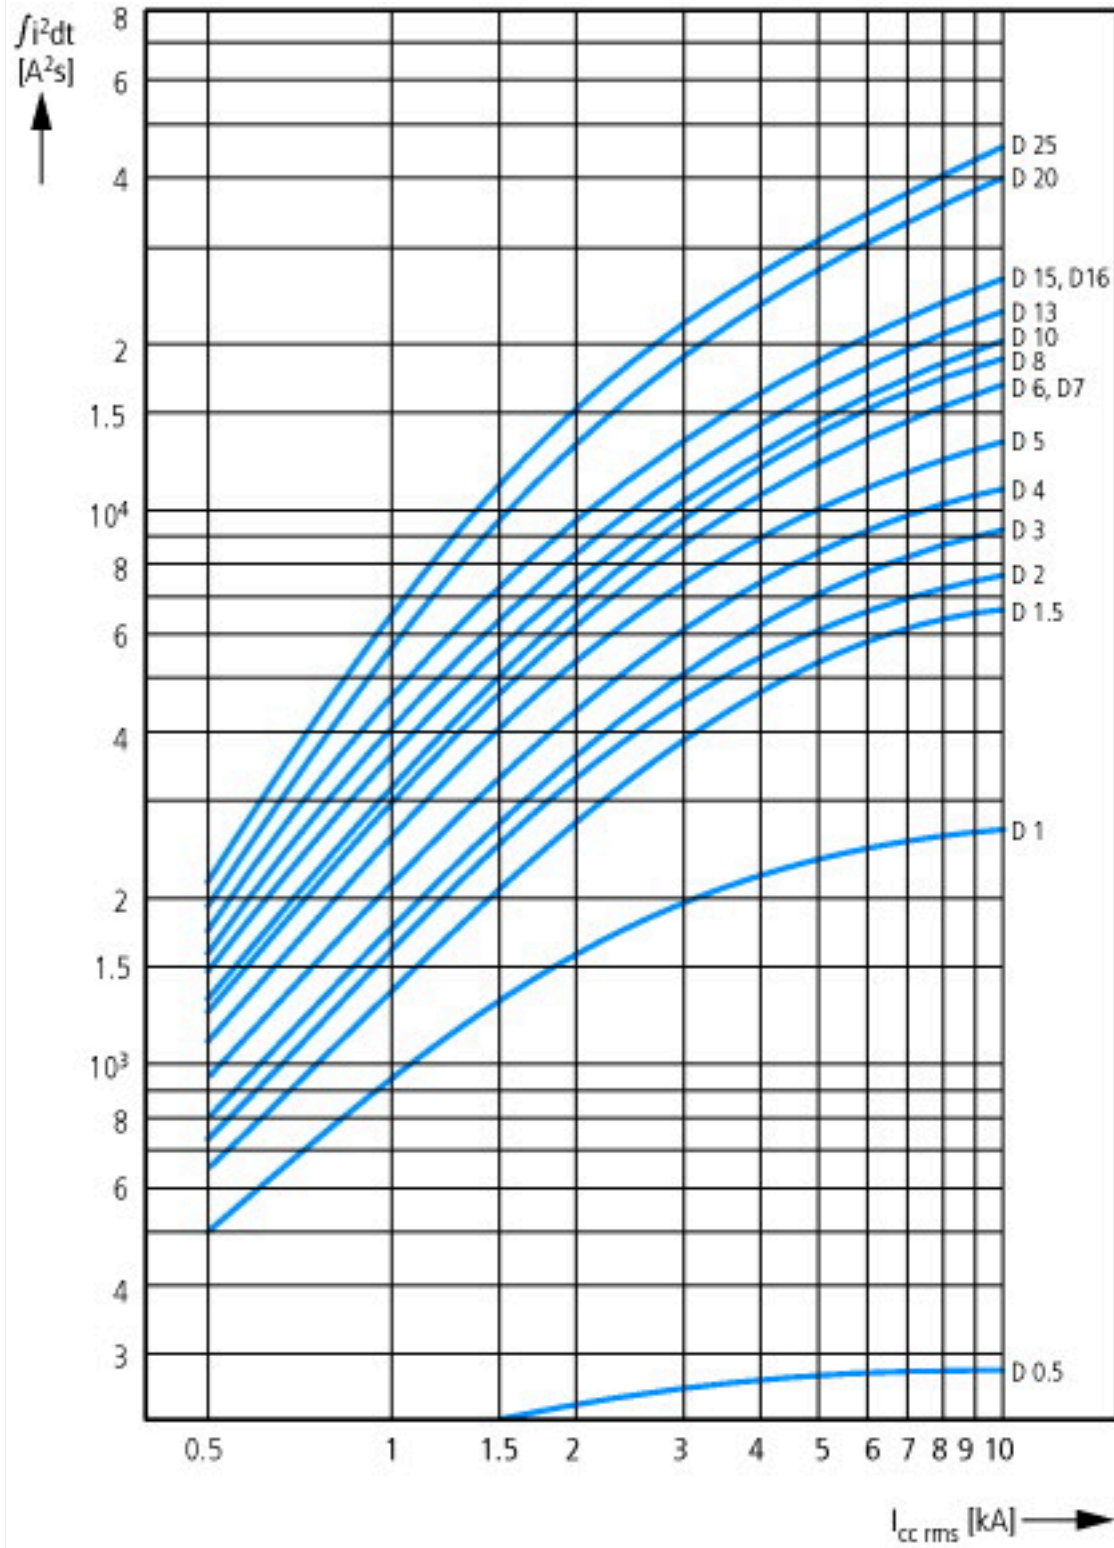

Let-through energy  $\int i^2 dt$   
 Characteristic D (0.5 - 20 A), 277 V

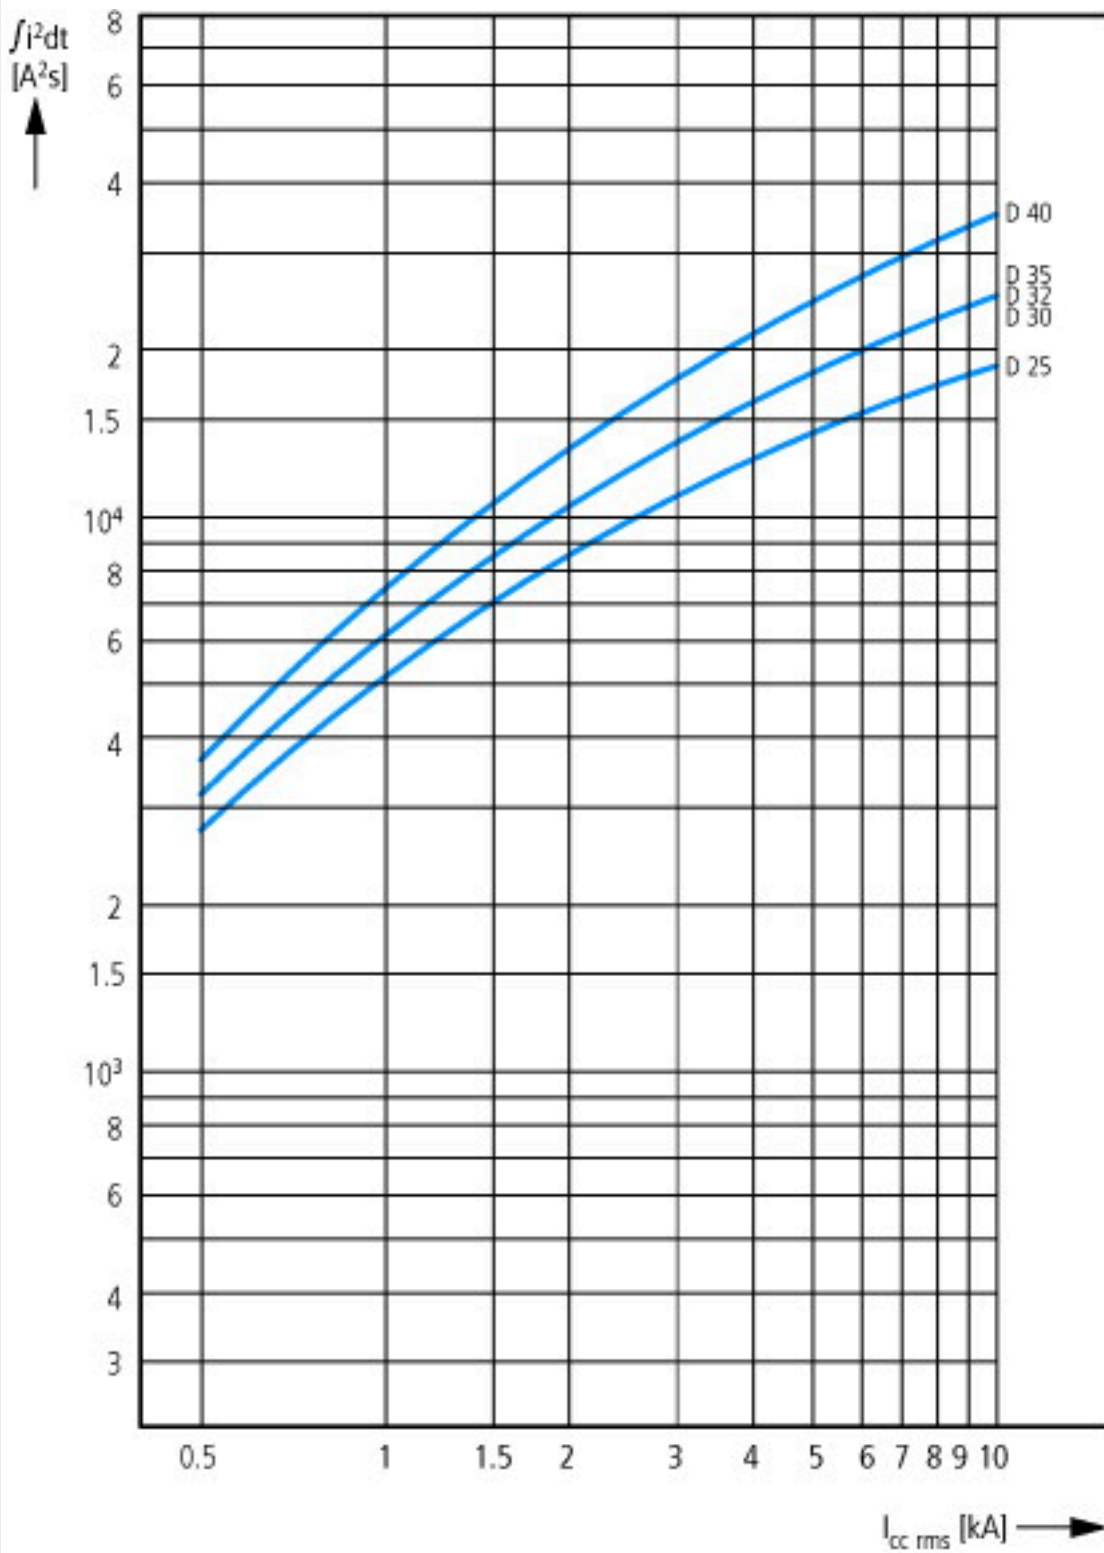

Characteristic D (25 - 40 A), 240 V

### Additional product information (links)

Temperature dependency, derating

<https://www.eaton.com/content/dam/eaton/technicaldocumentation/technical-data-tables/Derating table FAZ-NA-RT.pdf>