



Analog input card XI/ON, 24 V DC, 2AI (PT100, 200, 500, 1000, Ni100, 1000)

Part no. XN-2AI-PT/NI-2/3
Catalog No. 140067

EL-Nummer (Norway) 4520656

Delivery program

Function			XI/ON I/O modules
Function			XN Slice module
Short Description			2 Analog inputs Acquisition of normalized signals for temperature measurement Connection of sensor types Pt100, Pt200, Pt500, Pt1000 and Ni100, Ni1000 in 2- or 3-wire circuit
For use with			XN-S3T-SBB XN-S3S-SBB XN-S4T-SBBS XN-S4S-SBBS

Technical data

General

Standards				EN 61000-6-2 EN 61000-6-4 EN 61131-2
Potential isolation				Yes, through optocoupler
Ambient temperature				
Ambient temperature, operation		°C		0 - +55
Storage, transport	ø	°C		-25 - +85
Relative humidity				
Relative humidity				5 - 95 % (indoor), Level RH-2, no condensation (for storage at 45°C)
Ambient conditions, mechanical				
Degree of Protection				IP20
Harmful gases		ppm		SO ₂ : 10 (rel. humidity < 75%, no condensation) H ₂ S: 1.0 (rel. humidity < 75 %,no condensation)
Vibration resistance, operating conditions				according to IEC/EN 60068-2-6
Mechanical shock resistance		g		according to IEC 60068-2-27
Continuous shock resistance (IEC/EN 60068-2-29)				According to IEC 60068-2-29
Drop and topple				According to IEC 60068-2-31, free fall according to IEC 60068-2-32
Electromagnetic compatibility (EMC)				
ESD	Air/contact discharge	kV		EN 61000-4-2
Electromagnetic fields	(0.08...1) / (1,4...2) / (2...2,7) GHz	V/m		EN 61100-4-2
Burst				EN 61100-4-4
Surge				EN 61100-4-5
Radiated RFI		V		EN 61100-4-6
Emitted interference (radiated, high frequency)	(30...230 MHz) / (230...1000 MHz)	dB		EN 55016-2-3
Voltage fluctuations/voltage dips				EN 61131-2
Type test				to EN 61131-2
Approvals				CE, cULus
Other technical data (sheet catalogue)				Technical Data

Analog input modules

Measured variables			Temperature (PT, NI), resistance R
Channels		Number	2
Rated voltage through supply terminal	U_L		24 V DC
Rated current consumption from supply terminal	I_L	mA	30
Rated current consumption from module bus	I_{MB}	mA	≤ 45
Heat dissipation		W	< 1
Offset error		%	0.1
Linearity		%	< 0.1
Basic error limit at 23 °C		%	0.2
Repetition accuracy (deviation)		%	0.05
Temperature coefficient			300 ppm/°C of full scale
Measured value representation			16-bit signed integer 12-bit full range left-justified
Cycle time		ms	< 130 (per channel)
Connectable sensors			Platinum sensors: PT100, PT200, PT500, PT1000 (according to DIN IEC 751) Nickel sensors: Ni100, Ni1000 (according to DIN 43760)
Temperature range		°C, (°F)	Pt: -200 - +850 (-328 - +1562)/-200 - +150 (-328 - +302) Ni: -60 - +250 (-76 - +482)/-60 - +150 (-76 - +302)
Diagnostics			Yes
Base modules			
without C connection			2-/3-wire XN-S3x-SBB
without C connection, for sensor feeding			4-wire XN-S4x-SBBS

Analog output modules

Measured variables			Temperature (PT, NI), resistance R
Channels		Number	2
Rated voltage through supply terminal	U_L		24 V DC
Rated current consumption from supply terminal	I_L	mA	30
Rated current consumption from module bus	I_{MB}	mA	≤ 45
Heat dissipation		W	< 1
Offset error		%	0.1
Linearity		%	< 0.1
Basic error limit at 23 °C		%	0.2
Repetition accuracy (deviation)		%	0.05
Temperature coefficient			300 ppm/°C of full scale
Measured value representation			16-bit signed integer 12-bit full range left-justified
Base modules			
without C connection			2-/3-wire XN-S3x-SBB

Digital outputs

Channels		Number	2
Rated voltage through supply terminal	U_L		24 V DC
Rated current consumption from the supply terminal (at load current = 0 mA)	I_L	mA	30
Rated current consumption from module bus	I_{MB}	mA	≤ 45
Can be connected			Platinum sensors: PT100, PT200, PT500, PT1000 (according to DIN IEC 751) Nickel sensors: Ni100, Ni1000 (according to DIN 43760)
Diagnostics			Yes

Digital inputs

Channels		Number	2
Rated voltage through supply terminal	U_L		24 V DC
Rated current consumption from supply terminal	I_L	mA	30
Rated current consumption from module bus	I_{MB}	mA	≤ 45
Heat dissipation		W	< 1
Base modules			
without C connection			2-/3-wire XN-S3x-SBB

Relay modules

Rated voltage through supply terminal	U_L		24 V DC
Rated current consumption from supply terminal	I_L	mA	30
Rated current consumption from module bus	I_{MB}	mA	≤ 45
Can be connected			Platinum sensors: PT100, PT200, PT500, PT1000 (according to DIN IEC 751) Nickel sensors: Ni100, Ni1000 (according to DIN 43760)
Base modules			
without C connection			2-/3-wire XN-S3x-SBB

Power supply module

Rated voltage through supply terminal	U_L		24 V DC
Rated current consumption from supply terminal	I_L	mA	30
Rated current consumption from module bus	I_{MB}	mA	≤ 45

Counter module

Channels		Number	2
Rated voltage through supply terminal	U_L		24 V DC
Rated current consumption from supply terminal	I_L	mA	30
Rated current consumption from module bus	I_{MB}	mA	≤ 45
Heat dissipation		W	< 1

Measuring modes

Temperature coefficient			300 ppm/°C of full scale
Number of parameter bits			4 bytes (2 bytes per channel)

Base modules

without C connection, for sensor feeding			4-wire XN-S4x-SBBS
--	--	--	-----------------------

Interfaces

Rated voltage through supply terminal	U_L		24 V DC
Rated current consumption from supply terminal	I_L	mA	30
Rated current consumption from module bus	I_{MB}	mA	≤ 45
Number of parameter bytes			4 bytes (2 bytes per channel)
Base modules			
without C connection, for sensor feeding			4-wire XN-S4x-SBBS

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I_n	A	0
Heat dissipation per pole, current-dependent	P_{vid}	W	0
Equipment heat dissipation, current-dependent	P_{vid}	W	0
Static heat dissipation, non-current-dependent	P_{vs}	W	1
Heat dissipation capacity	P_{diss}	W	0
Operating ambient temperature min.		°C	0
Operating ambient temperature max.		°C	55
Degree of Protection			IP20
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Meets the product standard's requirements.

10.4 Clearances and creepage distances		Meets the product standard's requirements.
10.5 Protection against electric shock		Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components		Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections		Is the panel builder's responsibility.
10.8 Connections for external conductors		Is the panel builder's responsibility.
10.9 Insulation properties		
10.9.2 Power-frequency electric strength		Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

PLC's (EG000024) / Fieldbus, decentr. periphery - analogue I/O module (EC001596)

Electric engineering, automation, process control engineering / Control / Field bus, decentralized peripheral / Field bus, decentralized peripheral - analogue I/O module (ec@ss10.0.1-27-24-26-01 [BAA061014])


Supply voltage AC 50 Hz	V	0 - 0
Supply voltage AC 60 Hz	V	0 - 0
Supply voltage DC	V	20.4 - 28.8
Voltage type of supply voltage		DC
Input, current		No
Input, voltage		No
Input, resistor		Yes
Input, resistance thermometer		No
Input, thermocouple		No
Input signal, configurable		Yes
Resolution of the analogue inputs	Bit	16
Output, current		No
Output, voltage		No
Output signal configurable		No
Resolution of the analogue outputs	Bit	0
Number of analogue inputs		2
Number of analogue outputs		0
Analogue inputs configurable		Yes
Analogue outputs configurable		Yes
Number of HW-interfaces industrial Ethernet		0
Number of interfaces PROFINET		0
Number of HW-interfaces RS-232		0
Number of HW-interfaces RS-422		0
Number of HW-interfaces RS-485		0
Number of HW-interfaces serial TTY		0
Number of HW-interfaces parallel		0
Number of HW-interfaces Wireless		0
Number of HW-interfaces USB		0
Number of HW-interfaces other		1
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		No
Supporting protocol for CAN		No
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for KNX		No
Supporting protocol for MODBUS		No

Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		No
Radio standard Bluetooth		No
Radio standard WLAN 802.11		No
Radio standard GPRS		No
Radio standard GSM		No
Radio standard UMTS		No
IO link master		No
System accessory		Yes
Degree of protection (IP)		IP20
Degree of protection (NEMA)		
Type of electric connection		Screw-/spring clamp connection
Fieldbus connection over separate bus coupler possible		Yes
Rail mounting possible		Yes
Wall mounting/direct mounting		No
Front build in possible		No
Rack-assembly possible		No
Suitable for safety functions		No
Category according to EN 954-1		
SIL according to IEC 61508		None
Performance level acc. EN ISO 13849-1		None
Appendant operation agent (Ex ia)		No
Appendant operation agent (Ex ib)		No
Explosion safety category for gas		None
Explosion safety category for dust		None
Width	mm	12.6
Height	mm	74
Depth	mm	55.4

Approvals

Product Standards		UL 508; CSA-C22.2 No. 142; IEC/EN 6113-2; CE marking
UL File No.		E205091
UL Category Control No.		NRAQ, NRAQ7
CSA File No.		UL report applies to both US and Canada
CSA Class No.		2252-01, 2252-81
North America Certification		UL recognized, certified by UL for use in Canada
Specially designed for North America		No
Current Limiting Circuit-Breaker		No
Degree of Protection		IEC: IP20, UL/CSA Type: -

Dimensions

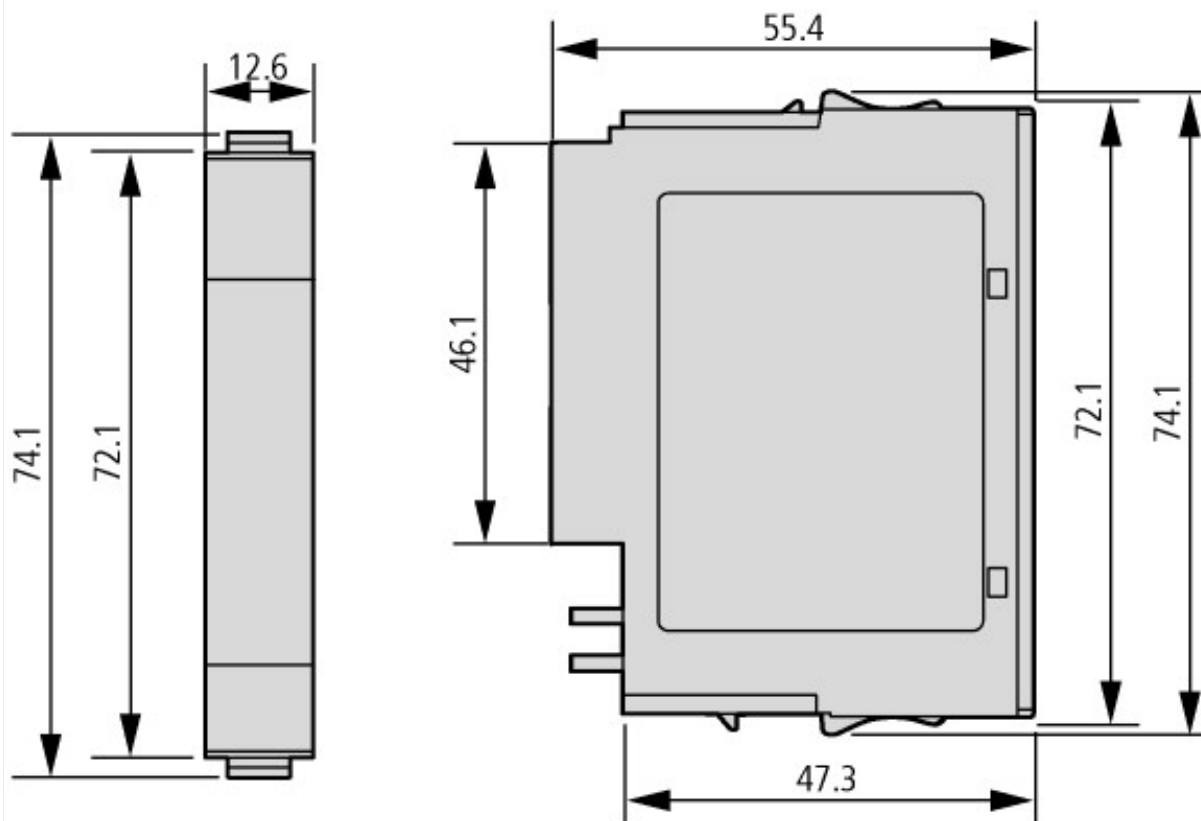

Dimensions

Assets (links)

Declaration of CE Conformity

00002416

Manuals

MN05002011Z_DE (German)

MN05002011Z_EN (English)

Additional product information (links)

Manual XI/ON analog I/O modules MN05002011Z

Handbuch XI/ON analoge E/A-Module MN05002011Z - Deutsch	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05002011Z_DE.pdf
Manual XI/ON analog I/O modules MN05002011Z - English	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05002011Z_EN.pdf
Technical Data	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=14.111