


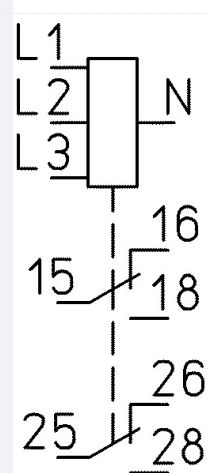

Phase monitoring relays, Multi-functional, 180 - 280 V AC, 50/60/400 Hz

Part no. **EMR6-AWN280-K-1**  
 Catalog No. **184769**  
 Alternate Catalog No. **EMR6-AWN280-K-1**  
 EL-Nummer (Norway) **4101965**

**Delivery program**

Product range			EMR Measuring and monitoring relays
Basic function			Phase monitoring relays
Function			Multi-functional Power supply from the measuring circuit On-delay/off-delay: none = 0 or adjustable between 0.1 - 30 s Imbalance threshold values adjustable 2 - 25 % of mean value of phase voltages Automatic phase sequence correction (can be disabled) Suitable for single-phase networks as well.
Monitoring voltage per phase	U <sub>N</sub>	V AC	180 - 280 V AC, 50/60/400 Hz
Monitoring of			Phase sequence (can be deactivated) Phase failure Overvoltage Undervoltage Imbalance Neutral cable break
Contact sequence			
Supply voltage			180 - 280 V AC, 50/60/400 Hz
Width		mm	22.5

**Technical data**

<b>General</b>		
Standards		IEC, UL, CSA, CCC, GL
Lifespan, mechanical	Operations x 10 <sup>6</sup>	30
Climatic proofing		Damp heat, cyclical to IEC 60068-2-30: 24 h cycle, 55° C, 93% relative humidity, 96 h
Ambient temperature		
Operation	°C	
Operating ambient temperature min.	°C	-25
Operating ambient temperature max.	°C	+ 60
Storage	°C	- 40 - 85
Mounting position		As required
Shock resistance		Class 2
Degree of protection		
Terminals		IP20
Enclosures		IP50
Terminal capacities	mm <sup>2</sup>	
Solid	mm <sup>2</sup>	1 x 0.5-2.5 (1 x 18-14 AWG)

Flexible with ferrule		mm <sup>2</sup>	2 x 0.5-1.5 (2 x 18-16 AWG)
Standard screwdriver		mm	5.5 x 0.8
Tightening torque		Nm	0.6 - 0.8
Fixing			Snap fixing, top-hat rail IEC/EN 60715
MTBF (mean time between failures)			424832 h

### Contacts

Rated impulse withstand voltage	U <sub>imp</sub>	V AC	4000
Overvoltage category/pollution degree			III/3

### Power supply

Supply voltage			180 - 280 V AC, 50/60/400 Hz
Voltage tolerance		x U <sub>c</sub>	0.85 - 1.1
Power consumption		VA	3
Rated frequency	f	Hz	50 - 60
Duty factor		% DF	100

### Timing cycle

Response delay time		s	0.25
Reset delay/Off-delay time		s	Adjustable from 0.1 – 30
Time error within supply voltage		%	0.5
Time error within temperature range		%/°C	0.06

### Measuring circuits

Frequency		Hz	50/60 ± 10 %
Hysteresis		%	0 ... 5
Frequency		Hz	50/60 ± 10 %
Measuring cycle		ms	50
Temperature error		%/°C	0.06
Error within supply voltage		%	0.5

### Status indication

Supply voltage			LED yellow
Overvoltage			LED red: F1 on
Undervoltage			LED red: F2 on
Status indicator (LED)			Yellow, solid: Supply voltage Yellow, solid (R): Relay energized Yellow, flashing (R/T): Delay time running Red, solid (F1 & F2): Imbalance Red, solid (F1): Overvoltage Red, solid (F2): Undervoltage Red: F1 solid, F2 flashing: Phase failure Red, F1 solid & F2 flashing: Open neutral conductor Red, flashing (F1 & F2 alternating): Phase sequence fault

### Relay output contacts

Rated operational voltage	U <sub>e</sub>	V AC	250
Rated operational current	I <sub>e</sub>	A	
AC-12 at 230 V	I <sub>e</sub>	A	4
AC-15 with 230 V	I <sub>e</sub>	A	3
DC-12 at 24 V	I <sub>e</sub>	A	4
DC-13 at 24 V	I <sub>e</sub>	A	2
Lifespan, electrical (AC-12/230 V/4 A)	Operations	x 10 <sup>6</sup>	
Lifespan, electrical	Operations	x 10 <sup>6</sup>	0.1
Short-circuit rating			
max. fuse	Fast/gL	A	5

### Electromagnetic compatibility (EMC)

Electromagnetic compatibility			IEC/EN 60947-6-2
ESD	Air/contact discharge	kV	IEC/EN 61000-4-2 level 3
HF-immunity to radiation			IEC/EN 61000-4-3 level 3
Burst			IEC/EN 61000-4-4 level 3
Surge			IEC/EN 61000-4-5 Level 4
HF-immunity to line-conducted interference			IEC/EN 61000-4-6 level 3

## Design verification as per IEC/EN 61439

Technical data for design verification			
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	60
IEC/EN 61439 design verification			
10.9 Insulation properties			
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.


## Technical data ETIM 7.0

Relays (EG000019) / Phase monitoring relay (EC001441)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Monitoring equipment (low-voltage switch technology) / Asymmetry monitoring equipment (ec@ss10.0.1-27-37-18-03 [AKF097014])			
Type of electric connection			Screw connection
With detachable clamps			No
Rated control supply voltage $U_s$ at AC 50HZ		V	180 - 280
Rated control supply voltage $U_s$ at AC 60HZ		V	180 - 280
Rated control supply voltage $U_s$ at DC		V	0 - 0
Voltage type for actuating			AC
Phase sequence monitoring			Yes
Phase failure detection			Yes
Function under voltage detection			Yes
Function over voltage detection			Yes
Phase imbalance monitoring			Yes
Voltage measurement range		V	180 - 280
Min. adjustable delay-on energization time		s	0.1
Max. permitted delay-on energization time		s	30
Min. adjustable off-delay time		s	0.1
Max. permitted off-delay time		s	30
Number of contacts as normally closed contact			0
Number of contacts as normally open contact			0
Number of contacts as change-over contact			2
Width		mm	22.5
Height		mm	85.6
Depth		mm	104.6

## Approvals

Product Standards			IEC 255-6; UL 508; CSA-22.2 No. 14-05; CE marking
UL File No.			E29184
UL Category Control No.			NKCR, NKCR7
CSA File No.			UL report valid
CSA Class No.			3211-03
North America Certification			UL listed, certified by UL for use in Canada

## Dimensions

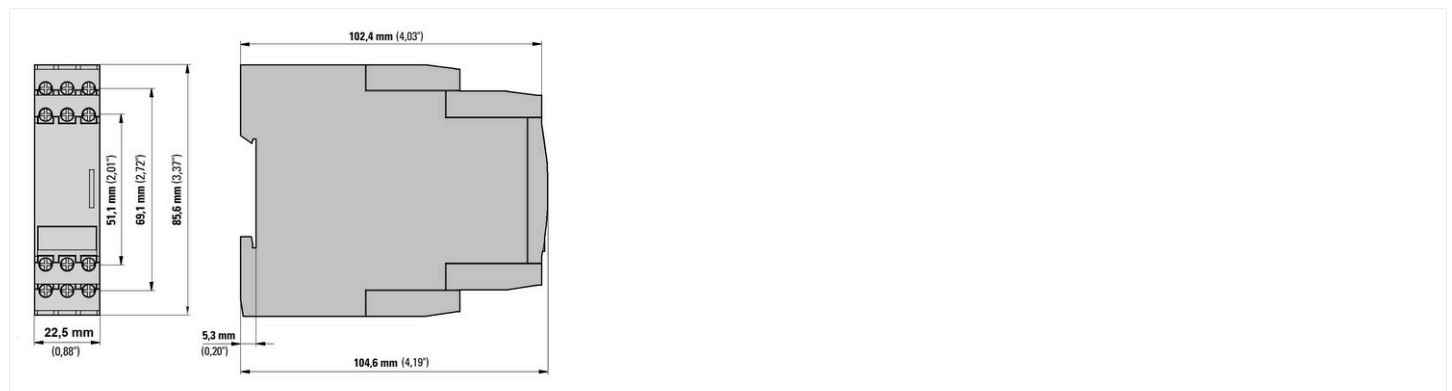

## Additional product information (links)

### IL121008ZU Multifunction three-phase monitoring relays

IL121008ZU Multifunction three-phase monitoring relays	<a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL121008ZU2018_07.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL121008ZU2018_07.pdf</a>
Phase monitoring relays	<a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=11.36">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=11.36</a>