



**Variable frequency drive, 230 V AC, 1-phase, 7 A, 0.75 kW, IP66/NEMA 4X,
Radio interference suppression filter, FS1**

EATON®
Powering Business Worldwide™

Part no. DC1-S27D0FN-A66CE1
Catalog No. 186092
Alternate Catalog No. DC1-S27D0FN-A66CE1

Delivery program

				This item is only available until 04/30/2021, after which it will be replaced with the following item: 199389, DC1-S27D0FN-A660E1
Product range				Variable frequency drives
Part group reference (e.g. DIL)				DC1
Rated operational voltage				230 V AC, 1-phase 240 V AC, single-phase
Output voltage with V_e				230 V AC, single-phase 240 V AC, single-phase
Mains voltage (50/60Hz)				U_{LN} V 200 (-10%) - 240 (+10%)
Rated operational current				
At 150% overload				I_e A 7
Note				Rated operational current at an operating frequency of 6 kHz and an ambient air temperature of +40 °C
Assigned motor rating				
Note				For AC motors with internal and external ventilation with 50/60 Hz without additional start capacitor
Note				Overload cycle for 60 s every 600 s
Note				at 230 V, 50 Hz
150 % Overload				P kW 0.75
150 % Overload				I_M A 7
Note				at 220 - 240 V, 60 Hz
150 % Overload				P HP 1
150 % Overload				I_M A 6.8
Degree of Protection				
Interface/field bus (built-in)				IP66/NEMA 4X
Fieldbus connection (optional)				OP-Bus (RS485)/Modbus RTU, CANopen®
Fitted with				SmartWire-DT
Parameterization				Keypad Fieldbus drivesConnect drivesConnect mobile (App)
Frame size				
Connection to SmartWire-DT				FS1
				no

Technical data

General

Standards			Specification for general requirements: IEC/EN 61800-2 EMC requirements: IEC/EN 61800-3 Safety requirements: IEC/EN 61800-5-1
Certifications			CE, UL, cUL, RCM, Ukr SEPRO, EAC
Production quality			RoHS, ISO 9001
Climatic proofing	ρ_w	%	< 95%, average relative humidity (RH), non-condensing, non-corrosive
Air quality			3C3, 3S3
Ambient temperature			
Operating ambient temperature min.		°C	-10
Operating ambient temperature max.		°C	+ 40
			operation (with 150 % overload)
Storage	θ	°C	-40 - +60

Radio interference level			
Radio interference class (EMC)			C1 (for conducted emissions only), C2, C3, depending on the motor cable length, the connected load, and ambient conditions. External radio interference suppression filters (optional) may be necessary.
Environment (EMC)			1st and 2nd environments as per EN 61800-3
maximum motor cable length	I	m	C1 ≤ 1 m C2 ≤ 5 m C3 ≤ 25 m
Mounting position			Vertical
Altitude		m	0 - 1000 m above sea level Above 1000 m: 1% derating for every 100 m max. 4000 m
Degree of Protection			IP66/NEMA 4X
Protection against direct contact			BGV A3 (VBG4, finger- and back-of-hand proof)

Main circuit

Supply			
Rated operational voltage	U _e		230 V AC, 1-phase 240 V AC, single-phase
Mains voltage (50/60Hz)	U _{LN}	V	200 (-10%) - 240 (+10%)
Input current (150% overload)	I _{LN}	A	12.9
System configuration			AC supply systems with earthed center point
Supply frequency	f _{LN}	Hz	50/60
Frequency range	f _{LN}	Hz	48 - 62
Mains switch-on frequency			Maximum of one time every 30 seconds
Power section			
Function			Variable frequency drive with internal DC link and IGBT inverter
Overload current (150% overload)	I _L	A	10.5
max. starting current (High Overload)	I _H	%	175
Note about max. starting current			for 2,5 seconds every 600 seconds
Output voltage with V _e	U ₂		230 V AC, single-phase 240 V AC, single-phase
Output Frequency	f ₂	Hz	0 - 50/60 (max. 500)
Switching frequency	f _{PWM}	kHz	8 adjustable 4 - 32 (audible)
Operation Mode			U/f control Speed control with slip compensation sensorless vector control (SLV) PM motors Synchronous reluctance motors BLDC motors
Frequency resolution (setpoint value)	Δf	Hz	0.1
Rated operational current			
At 150% overload	I _e	A	7
Note			Rated operational current at an operating frequency of 6 kHz and an ambient air temperature of +40 °C
Power loss			
Heat dissipation at rated operational current I _e =150 %	P _V	W	37.5
Efficiency	η	%	95
Maximum leakage current to ground (PE) without motor	I _{PE}	mA	2.49
Fitted with			Radio interference suppression filter 7-digital display assembly Additional PCB protection
Frame size			F51
Motor feeder			
Note			For AC motors with internal and external ventilation with 50/60 Hz without additional start capacitor
Note			Overload cycle for 60 s every 600 s
Note			at 230 V, 50 Hz
150 % Overload	P	kW	0.75
Note			at 220 - 240 V, 60 Hz
150 % Overload	P	HP	1
maximum permissible cable length	I	m	screened: 50 screened, with motor choke: 100

			unscreened: 75 unscreened, with motor choke: 150
Apparent power			
Apparent power at rated operation 230 V	S	kVA	1.61
Apparent power at rated operation 240 V	S	kVA	1.68
Braking function			
DC braking torque			max. 100% of rated operational current I_e , variable

Control section

Reference voltage	U_s	V	10 V DC (max. 10 mA)
Analog inputs			2, parameterizable, 0 - 10 V DC, 0/4 - 20 mA
Analog outputs			1, parameterizable, 0 - 10 V
Digital inputs			4, parameterizable, max. 30 V DC
Digital outputs			1, parameterizable, 24 V DC
Relay outputs			1, parameterizable, N/O, 6 A (250 V, AC-1) / 5 A (30 V, DC-1)
Interface/field bus (built-in)			OP-Bus (RS485)/Modbus RTU, CANopen®

Assigned switching and protective elements

Power Wiring			
Safety device (fuse or miniature circuit-breaker)			
IEC (Type B, gG), 150 %			FAZ-B16/1N
UL (Class CC or J)	A	15	
Mains contactor			
150 % overload (CT/ I_H , at 50 °C)			DILEM-... + P1DILEM
Main choke			
150 % overload (CT/ I_H , at 50 °C)			DX-LN1-018
Radio interference suppression filter (external, 150 %)			DX-EMC12-014-FS1
Note regarding radio interference suppression filter			Optional external radio interference suppression filter for longer motor cable lengths and for use in different EMC environments

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I_n	A	7
Heat dissipation per pole, current-dependent	P_{vid}	W	0
Equipment heat dissipation, current-dependent	P_{vid}	W	37.5
Static heat dissipation, non-current-dependent	P_{vs}	W	0
Heat dissipation capacity	P_{diss}	W	0
Operating ambient temperature min.		°C	-10
Operating ambient temperature max.		°C	40
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.

10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Frequency converter =< 1 kV (EC001857)

Electric engineering, automation, process control engineering / Electrical drive / Static frequency converter / Static frequency converter = < 1 kV (ecl@ss10.0.1-27-02-31-01 [AKE177014])


Mains voltage	V	180 - 264
Mains frequency		50/60 Hz
Number of phases input		1
Number of phases output		1
Max. output frequency	Hz	500
Max. output voltage	V	250
Nominal output current I _{2N}	A	7
Max. output at quadratic load at rated output voltage	kW	0.75
Max. output at linear load at rated output voltage	kW	0.75
Relative symmetric net frequency tolerance	%	10
Relative symmetric net voltage tolerance	%	10
Number of analogue outputs		1
Number of analogue inputs		2
Number of digital outputs		1
Number of digital inputs		4
With control unit		Yes
Application in industrial area permitted		Yes
Application in domestic- and commercial area permitted		Yes
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		No
Supporting protocol for CAN		Yes
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for KNX		No
Supporting protocol for MODBUS		Yes
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		Yes
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for BACnet		No
Supporting protocol for other bus systems		Yes
Number of HW-interfaces industrial Ethernet		0
Number of interfaces PROFINET		0

Number of HW-interfaces RS-232		0
Number of HW-interfaces RS-422		0
Number of HW-interfaces RS-485		1
Number of HW-interfaces serial TTY		0
Number of HW-interfaces USB		0
Number of HW-interfaces parallel		0
Number of HW-interfaces other		0
With optical interface		No
With PC connection		Yes
Integrated breaking resistance		No
4-quadrant operation possible		No
Type of converter		U converter
Degree of protection (IP)		IP66
Degree of protection (NEMA)		4X
Height	mm	232
Width	mm	161
Depth	mm	184

Approvals

Product Standards	UL 508C; CSA-C22.2 No. 14; IEC/EN61800-3; IEC/EN61800-5; CE marking
UL File No.	E172143
UL Category Control No.	NMMS, NMMS7
CSA File No.	UL report applies to both US and Canada
North America Certification	UL listed, certified by UL for use in Canada
Specially designed for North America	No
Suitable for	Branch circuits
Max. Voltage Rating	1~ 240 V AC IEC: TN-S UL/CSA: "Y" (Solidly Grounded Wye)
Degree of Protection	IEC: IP66

Dimensions

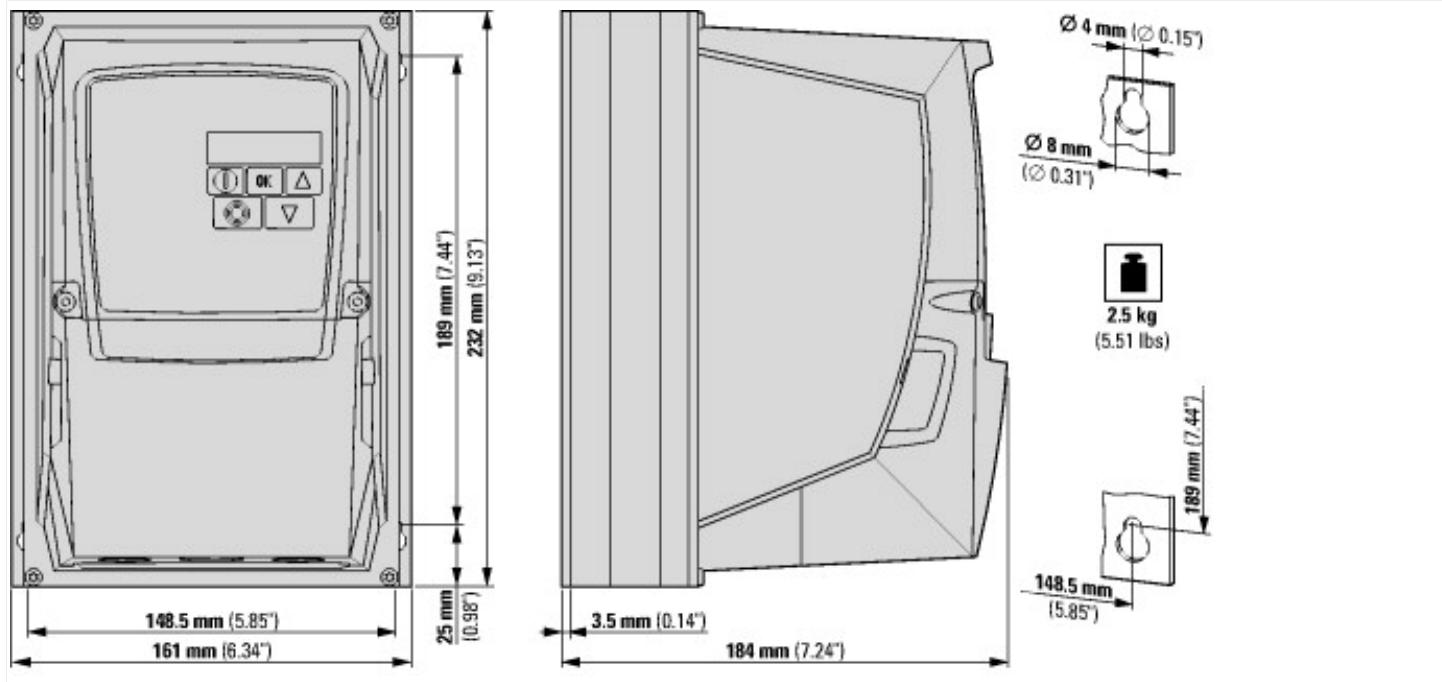

Additional product information (links)

IL040001ZU DC1 variable frequency drive (FS1 - FS3, IP66)

IL040001ZU DC1 variable frequency drive (FS1 - FS3, IP66) https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL040001ZU2019_08.pdf

MN040023 DC1...E1 Installation manual

MN040023 DC1...E1 Installationshandbuch - Deutsch https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040023_DE.pdf

MN040023 DC1...E1 Installation manual - English	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040023_EN.pdf
MN040023 DC1...E1 manuale Installazione - italiano	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040023_IT.pdf
MN040023 DC1...E1 podręcznik instalacji - polski	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040023_PL.pdf
MN040022 DC1...E1, Parameters manual	
MN040022 DC1...E1, Parameterhandbuch - Deutsch	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040022_DE.pdf
MN040022 DC1...E1, Parameters manual - English	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040022_EN.pdf
MN040022 DC1...E1, manuale Parametri - italiano	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040022_IT.pdf
MN040022 DC1...E1, podręcznik parametrów - polski	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN040022_PL.pdf
CA04020001Z-EN Product Range Catalog: Efficient Engineering for Starting and Controlling Motors	http://www.eaton.eu/DE/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1095238.pdf