


SKINDICHT® SVFK

SKINDICHT® SVFK, PG plastic flat cable gland, with automatically fitting lateral sealing lips



Wide clamping range

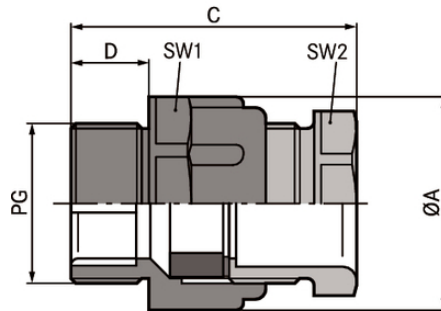

Assembly time



Optimum strain relief



Reliability

Benefits

Economical type
 Lateral sealing lips fit automatically around various cable dimensions
 Cable-specific seal dimensions are no longer necessary
 Tolerance
 Large opening allows clamping of up to two flat cables

Application range

For inserting flat cables
 Conveyor systems
 Pumps
 Lifts
 Control cabinet manufacturing

Product Make-up

PG connection thread

Note

Counter nut to be used: SKINDICHT® GMK

Last Update (07.10.2021)

©2021 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

SKINDICHT® SVFK

For suitable flat cables, refer to ÖLFLEX® LIFT F for indoor applications or ÖLFLEX® CRANE F for outdoor applications

Technical Data

Classification ETIM 5:	ETIM 5.0 Class-ID: EC000441 ETIM 5.0 Class-Description: Cable screw gland
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000441 ETIM 6.0 Class-Description: Cable screw gland
Caution:	The installation dimensions can be found in appendix T21
Colour delivered:	Light grey (RAL 7035)
Material:	Body: Polystyrene Special sealing insert: CR
Protection rating:	IP 54
Temperature range:	-20°C to +60°C

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.
Prices are net prices without VAT and surcharges. Sale to business customers only.

SKINDICHT® SVFK

Article number	Article designation / size	Min./max. flat cable width	Cable thickness min. / max. mm	SW1/SW2 mm	Overall length C mm	Thread length D mm	Pieces / PU
SKINDICHT® SVFK							
52005470	PG 16	-- 15.0	-- 5.0	27.0 / 23.0	39.5	10	25
52005680	PG 21	10.0 / 20.5	3.0 - 8.0	32.0 / 30.0	43.0	11	25
52005690	PG 29	15.0 / 27.0	4.0 - 11.5	42.0 / 41.0	45.0	11	25
52005700	PG 36	25.0 / 34.0	4.0 - 11.5	53.0 / 50.0	51.0	13	10
52005710	PG 42	30.0 / 40.0	5.0 - 12.0	60.0 / 55.0	54.0	13	5
52005720	PG 48	35.0 / 45.0	5.0 - 12.0	65.0 / 60.0	55.0	15	5

Last Update (07.10.2021)

©2021 Lapp Group - Technical changes reserved

Product Management www.lappkabel.deYou can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16