

MOSA M12 MALE 0° FIELD-WIREABLE (IDC)4-pol., 0,14-0,34mm²

Male straight



M12, 4-pole

Insulation displacement technology IDC

Connection cross section: 0.14...0.34 mm²

The resistance to aggressive media should be individually tested for your application.
Further details on request.

[Link to Product](#)**Illustration****Male**

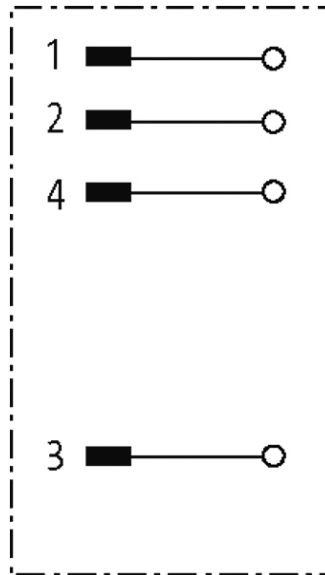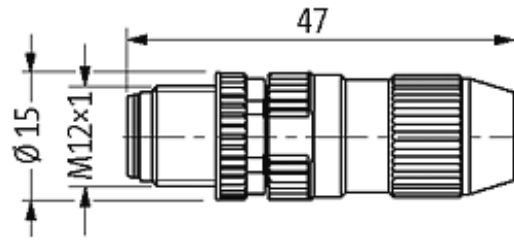

Product may differ from Image

Approvals



Form

Form 12491

Technical Data

Operating voltage	max. 32 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	0.14...0.34 mm ² (conductor diameter min. 0.1 mm)
Sealing range (cable Ø)	2.9...5.1 mm
Wire isolation	PVC, PP, TPE
Outer wire Ø	1.0...1.6 mm
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)
Reconnection (cable)	10

General data

Temperature range -25...+85 °C

Dimensions H x W x D 43x15x15 mm

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879201834
eClass	27279221
Packaging unit	1