
KVMS 105-W75/Ni

Cable gland, brass nickel-plated, similar to DIN 89280, M105







Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

RoHS

Material cable gland	Brass nickel-plated
Material sealing gasket	EPDM
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP54
Thread type	M
Ø Connection thread D	105
Lead	2
Length screw-in thread L	20 mm
Ø cable diameter min	73 mm
Ø cable diameter max	78 mm
Key width SW1	105 mm
Key width SW2	115 mm
Collar diameter E1	114 mm
Collar diameter E2	127 mm
Total length TL	88 mm
Install. torques fitting	30 N m
Install. torques cap nut	30 N m
Advice	* Similar to DIN 89280
Surface	Nickel-plated
Order no. nickel-plated	10016723
Type	KVMS 105-W75/Ni
Packing unit	1
ETIM-Classification	EC000441

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice


Recommended accessories

GM 105/Ni	10011708

14.01.2021

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

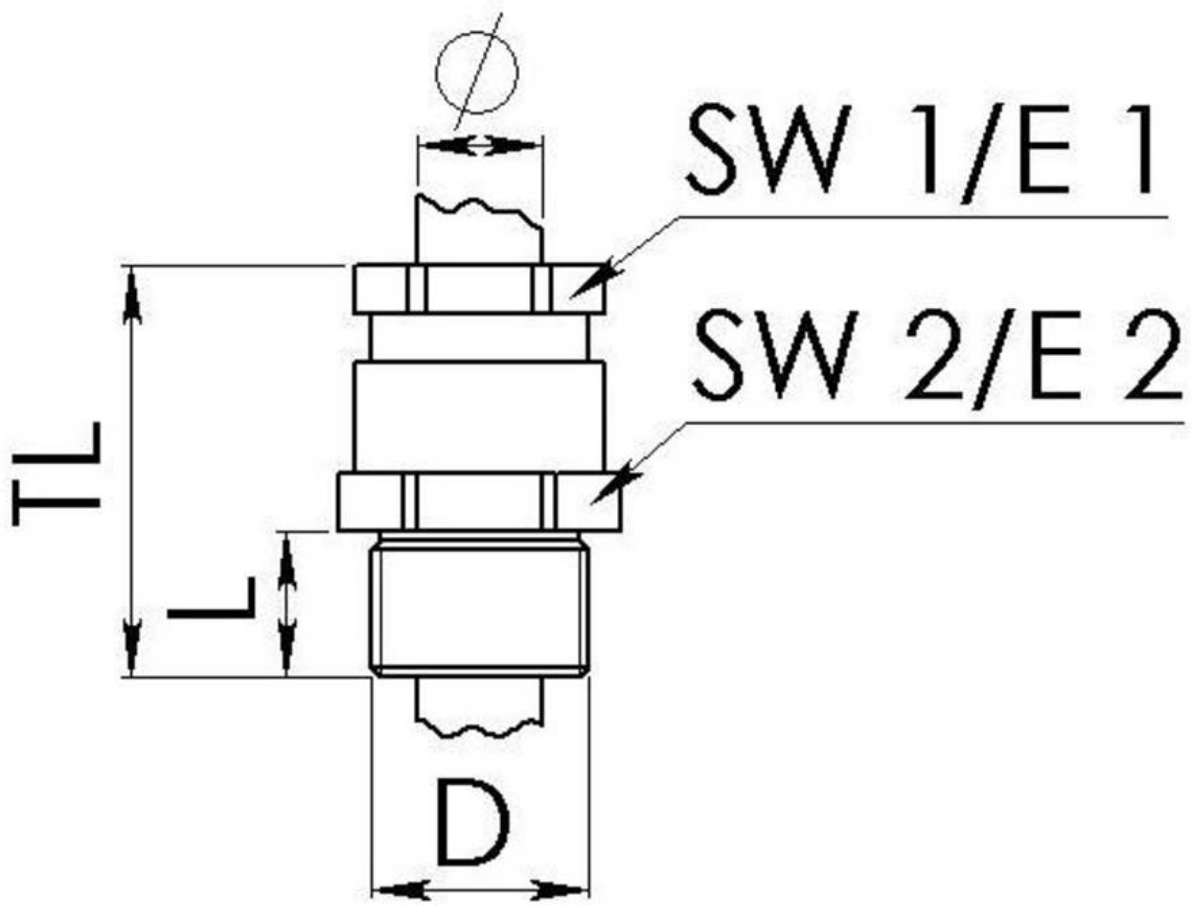

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice